

BRANCH TERMINAL THERMOPLASTIC SCREW TERMINAL
BEIGE, 7.2MM, SZ 6

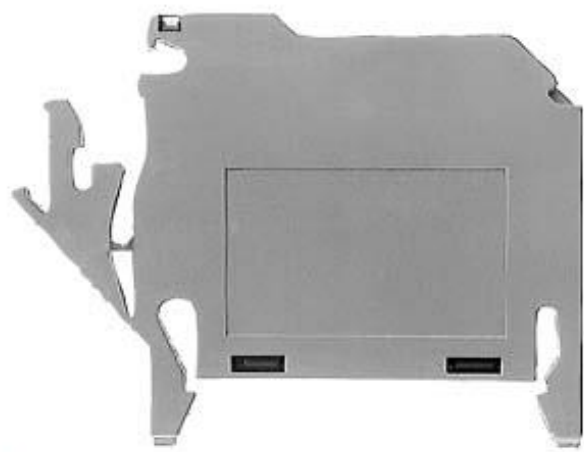


Figure similar

Model	
Busbar design	6x6 mm
General technical data	
Insulation material	thermoplastic
Terminal contact spacing	10 mm
Protection class	
Combustibility class acc. to UL 94	others
Main circuit	
Operating voltage / rated value	300 V
Operating current / rated value	73 A
Appearance	
Color	miscellaneous
Product details	
Product component / required / connection plate	No
Number	

Number of terminal points	1
---------------------------	---

Connections

Connectable conductor cross-section / stranded	
• minimum	16 mm ²
• maximum	16 mm ²
Wire stripping length	13 mm
Connectable conductor cross-section	
• finely stranded	
— with core end processing / minimum	16 mm ²
— with core end processing / maximum	16 mm ²
Tightening torque / with screw-type terminals	
• minimum	1.2 N·m
• maximum	1.2 N·m
Type of electrical connection	screw-type terminals

Mechanical Design

Height / with lowest-profile installation	35 mm
Length	55 mm
Mounting type	others
Net weight	27 g
Material / of the insulating body	Thermoplast

General Product Approval	Declaration of Conformity	Test Certificates	Shipping Approval
--------------------------	---------------------------	-------------------	-------------------



[sonstig](#)



Shipping Approval	other
-------------------	-------

[Umweltbestätigung](#)



GL

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/8WA1011-1NK02>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/8WA1011-1NK02/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8WA1011-1NK02

CAX-Online-Generator
<http://www.siemens.com/cax>

Tender specifications
<http://www.siemens.com/specifications>