

BRANCH TERMINAL THERMOPLASTIC SCREW TERMINAL  
BEIGE, 6MM, SZ 2.5

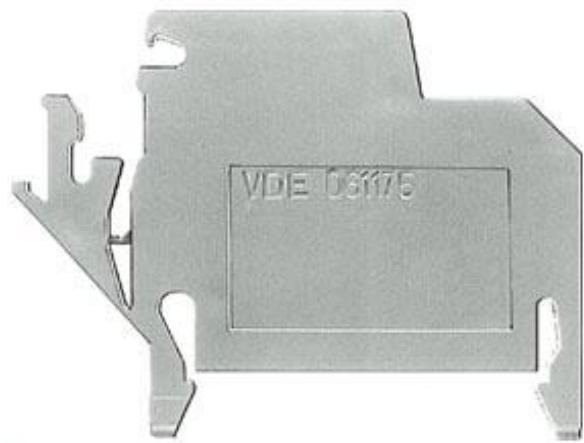


Figure similar

|                                                 |               |
|-------------------------------------------------|---------------|
| Model                                           |               |
| Busbar design                                   | 6x6 mm        |
| General technical data                          |               |
| Insulation material                             | thermoplastic |
| Terminal contact spacing                        | 6 mm          |
| Protection class                                |               |
| Combustibility class acc. to UL 94              | others        |
| Main circuit                                    |               |
| Operating voltage / rated value                 | 600 V         |
| Operating current / rated value                 | 26 A          |
| Appearance                                      |               |
| Color                                           | miscellaneous |
| Product details                                 |               |
| Product component / required / connection plate | No            |
| Number                                          |               |

|                           |   |
|---------------------------|---|
| Number of terminal points | 1 |
|---------------------------|---|

## Connections

|                                                       |                      |
|-------------------------------------------------------|----------------------|
| <b>Connectable conductor cross-section / stranded</b> |                      |
| • minimum                                             | 2.5 mm <sup>2</sup>  |
| • maximum                                             | 2.5 mm <sup>2</sup>  |
| <b>Wire stripping length</b>                          | 11 mm                |
| <b>Connectable conductor cross-section</b>            |                      |
| • finely stranded                                     |                      |
| — with core end processing / minimum                  | 2.5 mm <sup>2</sup>  |
| — with core end processing / maximum                  | 2.5 mm <sup>2</sup>  |
| <b>Tightening torque / with screw-type terminals</b>  |                      |
| • minimum                                             | 0.5 N·m              |
| • maximum                                             | 0.5 N·m              |
| <b>Type of electrical connection</b>                  | screw-type terminals |

## Mechanical Design

|                                           |             |
|-------------------------------------------|-------------|
| Height / with lowest-profile installation | 35 mm       |
| Length                                    | 55 mm       |
| Mounting type                             | others      |
| Net weight                                | 12 g        |
| Material / of the insulating body         | Thermoplast |

|                                 |                                  |                          |                          |
|---------------------------------|----------------------------------|--------------------------|--------------------------|
| <b>General Product Approval</b> | <b>Declaration of Conformity</b> | <b>Test Certificates</b> | <b>Shipping Approval</b> |
|---------------------------------|----------------------------------|--------------------------|--------------------------|



[sonstig](#)



|                          |              |
|--------------------------|--------------|
| <b>Shipping Approval</b> | <b>other</b> |
|--------------------------|--------------|



[Umweltbestätigung](#)

## Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/8WA1011-1NF02>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<http://support.automation.siemens.com/WW/view/en/8WA1011-1NF02/all>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=8WA1011-1NF02](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8WA1011-1NF02)

**CAX-Online-Generator**

<http://www.siemens.com/cax>

