SIEMENS

Show actual product details

Data sheet 3RK2400-1HQ00-0AA3

Figure similar

AS-INTERFACE COMPACT MOD. K60, A/B-SLAVE,DIGITAL, 8I/2O, IP67, 3 X 2 I / 2 X 1I/1O, DC 24V 8 X M12-SOCKET SPECIALLY FOR SENSORS/ACTUATORS WITH DIAGNOSTICS FUNCTION MOUNTING PLATE 3RK1901-0CA00 OR 3RK1901-0CB01 TO BE ORDERED SEPARATELY

General technical data:		
Design of the product		digital I/O modules for operation in the field, IP67 - K60
Type		8 inputs / 2 outputs
Design of the slave type		A/B slave
I/O configuration		0 (addr.1) / 7 (addr.2)
ID/ID2 code		I/O (addr.1 and 2)
Number I/O sockets		8
Type of electrical connection of the inputs and outputs		M12 screw-type terminals
AS interface total current input max	mA	300
operating voltage according to AS-Interface spezification	V	26.5 ... 31.6
Ground terminal		PIN5 of each M12 socket is connected to the grounding wrist strap in the mounting plate using a pin
Addressing		front addressing socket
Delivery note		the modules are delivered without mounting plate

Subject to change without notice
© Copyright Siemens AG

note		module requires two addresses
Note 1		All K60 compact modules are delivered with stainless steel screws/sockets
Note 2		An external additional supply (AUX POWER) of 20 to 30 V DC is required for the supply of the output circuits. The additional supply must comply with VDE 0106 (PELV), protection class III.
Sensor supply:		
Type of voltage supply for power supply		using AS-Interface
Input voltage	V	20 ... 30
Property of the sensor supply Short-circuit and overload resistant		Yes
Ampacity of the sensor supply for all inputs		
• at ambient temperature 40 °C	mA	200
Inputs:		
Number of digital inputs		8
Type of connection		2- and 3-wire technology
Input circuit		PNP transistor
Type of voltage of the input voltages		DC
Inputs switching level High min	V	10
Input current at digital input		
• for signal <1> minimum	mA	6
• with signal <0> maximum	mA	1.5
Inputs		
• sensor supply using AS-Interface		short-circuit and overload resistant
• socket assignment		
— PIN 1		sensor supply L+
— PIN 2		data input II
— PIN 3		sensor supply L-
— PIN 4		data input I
— PIN 5		ground terminal
Design of the pin assignment of the inputs		special assignement
Outputs:		
Number of digital outputs		2
Type of voltage of output voltages		DC
Outputs external power supply 24 V DC		using black AS-Interface flat cable
Output current at digital output for signal <1> Rated value	A	2
Outputs aggregate current max	A	4
Type of switching output		PNP transistor
Design of the pin assignment of the outputs		special assignement
Outputs socket assignment		3 = "-", 4 = output, 5 = ground terminal

© Copyright Siemens AG

Property of the output Short-circuit proof		Yes
Outputs		
• short-ciruit protection		built-in
• induction protection		built-in
• watchdog		built-in

Assignment of the data bits:		
Assignment of data bits		
• socket		PIN 4 = IN1 (D0) (addr. 1), PIN 2 = IN2 (D1) (addr. 1)
• socket 2		PIN 4 = IN2 (D1) (addr. 1)
• socket 3		PIN 4 = IN3 (D2) (addr. 1), PIN 2 = IN4 (D3) (addr.1)
• socket 4		PIN 4 = IN4 (D3) (addr. 1)
• socket 5		PIN 4 = IN1 (D0) (addr. 2), PIN 2 = IN2 (D1) (addr. 2)
• socket 6		PIN4 = IN2 (D1) (addr. 2)
• socket 7		PIN4 = OUT1 (D0) (addr. 2), PIN3 = IN3 (D2) (addr. 2)
• socket 8		PIN4 = OUT2 (D1) (addr. 2), PIN2 = IN4 (D3) (addr.2)

Ambient conditions:		
Ambient temperature		
• during operation	°C	-25 ... +85
• during storage	°C	-40 ... +85
Protection class IP		IP67

Display:		
Status display		
• display of I/Os		yellow LED
• display of Uaux		green LED
• display of AS-Interface/diagnostics		green/red LED

Mechanical data:		
Width	mm	60
Height	mm	152
Depth	mm	29
Mounting type		standard rail mounting/wall mounting using mounting plate for K60 compact module

Certificates/ approvals:		
AS-Interface certificate		yes (or requested for in case of new units)
Approvals		UL, CSA, shipbuilding (or requested for in case of new units)

© Copyright Siemens AG

General Product Approval			Declaration of Conformity	Shipping Approval	
CSA	UL		EG-Konf.	ABS	DNV

Shipping Approval			other		
LRS	PRS	RMRS	ASi	Umweltbestätigung	Bestätigungen

other
sonstig

Further information

Information- and Downloadcenter (Catalogs, Brochures,…)
http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)
http://www.siemens.com/industrymall

Cax online generator
http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK2400-1HQ00-0AA3

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/3RK2400-1HQ00-0AA3

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK2400-1HQ00-0AA3&lang=en

Subject to change without notice
© Copyright Siemens AG

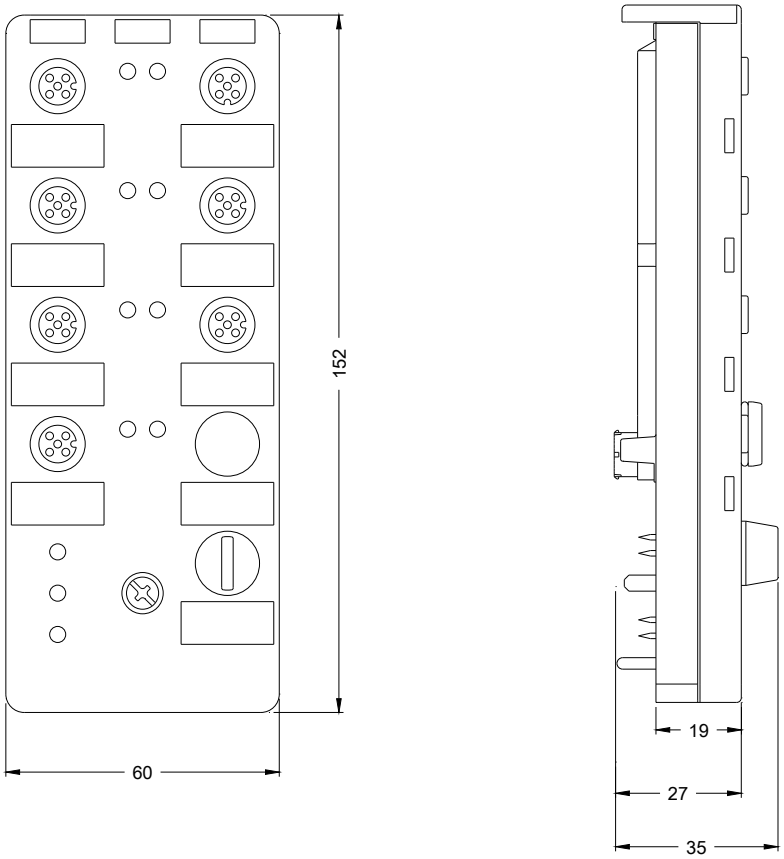

last modified: 10/07/2016

Subject to change without notice
© Copyright Siemens AG