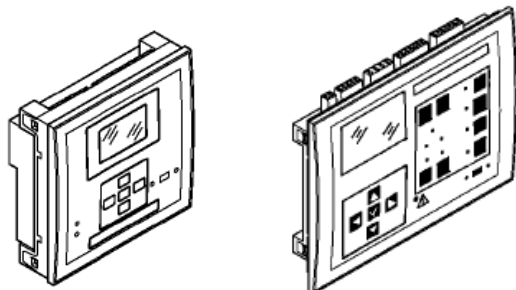


ATS

Automatic transfer switches Advanced version

Reference(s) : **4 226 82/83**


CONTENTS

PAGES

1. USE	1
2. RANGE	1
3. DIMENSIONS	1
4. ELECTRICAL AND MECHANICAL CHARACTERISTICS	2
5. CONFORMITY	4
6. EQUIPMENTS AND ACCESSORIES	5
7. SYNOPTICS	9
8. SOURCE PRIORITIES	13
9. OPEN OR CLOSED TRANSITION	13

1. USE


ATS automation transfer switches can control power supply inversion between two sources, manage generator start/stop, control single phase, two-phase and three-phase networks, control phase-phase and phase-neutral voltages.

2. RANGE


Reference	Management
4 226 82	2 breakers advanced managing
4 226 83	3 breakers advanced managing

3. DIMENSIONS


4 226 82 overall dimensions (mm)

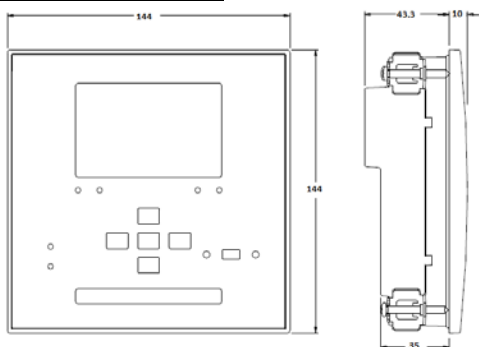


4 226 82 panel cutout (mm)



4 226 83 overall dimensions (mm)

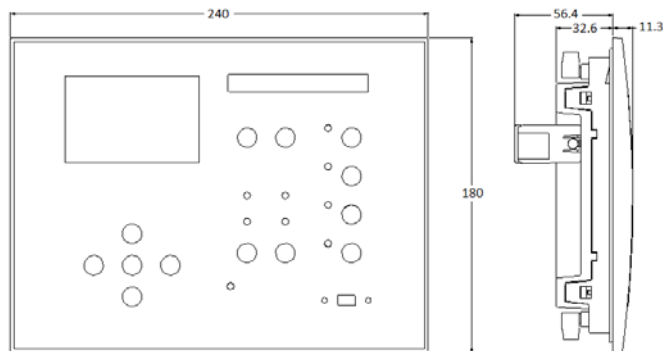

4 226 83 panel cutout (mm)

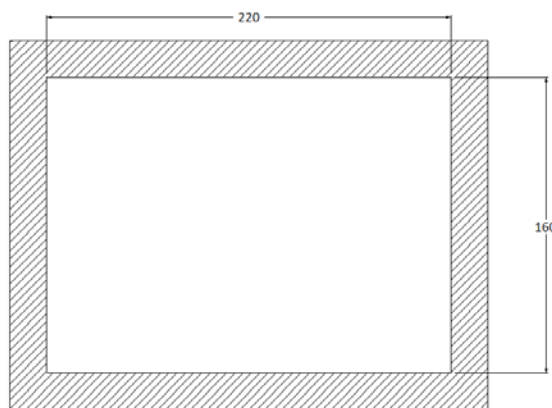

ATS

Automatic transfer switches

Advanced version

Reference(s) : 4 226 82/83

4. ELECTRICAL AND MECHANICAL CHARACTERISTICS

		4 226 82	4 226 83
AC power supply	Rated voltage U _e	100 - 240 V AC 110 - 250 V DC	101 - 240 V AC 111 - 250 V DC
	Frequency	45 - 66 Hz	45 - 66 Hz
	Power consumption/ dissipation	3.8 W - 9.5 VA	100 V AC: 10 VA, 5.3 W 240 V AC: 12.5 VA, 5.5 W
DC power supply	Battery rated voltage	12 or 24 V DC	12 - 48 V DC
	Maximum current consumption	230 mA at 12 V DC 120 mA at 24 V DC	400 mA at 12 V DC 220 mA at 24 V DC 100 mA at 48 V DC
	Maximum power consumption/ dissipation	2.9 W	4.8 W
Line 1 and Line 2 voltage inputs	Maximum rated voltage U _i	480 V AC L-L (277 V AC L-N)	600 V AC L-L (346 V AC L-N)
	Measuring range	50 - 576 V AC L-L (333 V AC L-N)	50...720 V L-L (415 V AC L-N)
	Frequency range	45 ÷ 66 Hz	45 ÷ 66 Hz - 360 ÷ 440 Hz
	Measuring method	True RMS	True RMS
	Measuring input impedance	> 0.5 MΩ L - N > 1.0 MΩ L - L	> 0.55 MΩ L - N > 1.10 MΩ L - L
	Wiring mode	Single-phase, two-phase, three-phase with or without neutral or balanced three- phase system	three-phase with or without neutral or balanced three- phase system
	Measuring accuracy	±0.25% f.s. ±1 digit	±0.25% f.s. ±1 digit
AC Supply Insulation voltage	Rated insulation voltage U _i	250 V AC	250 V AC
	Rated impulse withstand voltage U _{imp}	7.3 kV	7.3 kV
Line 1 and Line 2 voltage inputs insulation voltage	Power frequency withstand voltage	3 kV	3 kV
	Rated insulation voltage U _i	480 V AC	600 V AC
Ambient operating conditions	Rated impulse withstand voltage U _{imp}	7.3 kV	9.8 kV
	Power frequency withstand voltage	3.8 kV	5.2 kV
Connections	Operating temperature	-30°C ÷ +70 °C	-30°C ÷ +70 °C
	Storage temperature	-30°C ÷ +80°C	-30°C ÷ +80°C
	Measurement category	III	III
Housing	Terminal type	Plug-in / removable	Plug-in / removable
	Cable cross section (min... max)	0.2 ÷ 2.5 mm ² (24 ÷ 12 AWG)	0.2 ÷ 2.5 mm ² (24 ÷ 12 AWG)
	Tightening torque	0.56 Nm (5 lbin)	0.56 Nm (5 lbin)
Modbus onboard port default configuration	Degree of protection	IP40 on front; IP20 terminals	IP65 on front; IP20 terminals
	Weight	680 g	1000 g
	Node address	-	1
Modbus onboard port default configuration	Speed	-	19200
	Data format	-	8 bit - EVEN
	Stop bits	-	1
	Protocol	-	RTU

4 226 82 Inputs and outputs

Digital inputs	
Input type	Negative
Current input	≤ 8 mA
Input Low Voltage	≤ 2.2 V
Input High Voltage	≥ 3.4 V
Input delay	≥ 50 ms

		Outputs	
		OUT1 - OUT2	OUT3
Contact type		2 x 1 NO	1 changeover
Rated current		AC1 - 8A 250 V AC DC1 - 8A 30 V DC AC15 - 1.5A 250 V AC	AC1 - 8A 250 V AC DC1 - 8A 30 V DC AC15 - 1.5A 250 V AC
Max rated voltage		300 V AC	300 V AC
Mechanical endurance		10 ⁷ cycles	10 ⁷ cycles
Electrical endurance		10 ⁵ cycles	10 ⁵ cycles
Max current at common contact		-	-
Insulation type		Single between OUT1 and OUT2 Double among the others	-
Rated insulation voltage		U _i 250 V AC	U _i 250 V AC
Rated impulse withstand voltage		U _{imp} 4.8 kV (single insulation)	U _{imp} 7.3 kV (double insulation)
Power frequency withstand voltage		1.5 kV (single insulation)	3 kV (double insulation)
		OUT4 - OUT5	OUT6 - OUT7
Contact type		2 x 1 NO + common contact	2 x 1 NO + common contact
Rated current		AC1 - 8A 250 V AC DC1 - 8A 30 V DC AC15 - 1.5A 250 V AC	AC1 - 8A 250 V AC DC1 - 8A 30 V DC AC15 - 1.5A 250 V AC
Max rated voltage		300 V AC	300 V AC
Mechanical endurance		10 ⁷ cycles	10 ⁷ cycles
Electrical endurance		10 ⁵ cycles	10 ⁵ cycles
Max current at common contact		10 A	10 A
Insulation type		Single between OUT4 and OUT5 Double among the others	Single between OUT6 and OUT7 Double among the others
Rated insulation voltage		U _i 250 V AC	U _i 250 V AC
Rated impulse withstand voltage		U _{imp} 4.8 kV (single insulation)	U _{imp} 7.3 kV (double insulation)
Power frequency withstand voltage		1.5 kV (single insulation)	3 kV (double insulation)

4 226 83 Inputs and outputs

Digital inputs	
Input type	Negative
Current input	≤ 8 mA
Input Low Voltage	≤ 2.2 V
Input High Voltage	≥ 3.4 V
Input delay	≥ 50 ms


		Outputs	
		OUT1 - OUT3	OUT2 - OUT4
Contact type		3 x 1 NO	3 x 1 NO
Rated current		AC1 - 8A 250 V AC AC15 - 1.5A 250 V AC	AC1 - 8A 250 V AC AC15 - 1.5A 250 V AC
Max rated voltage		300 V AC	300 V AC
Mechanical endurance		10 ⁷ cycles	10 ⁷ cycles
Electrical endurance		10 ⁵ cycles	10 ⁵ cycles
Max current at common contact		12 A	12 A
Rated insulation voltage		U _i 250 V AC	U _i 250 V AC
Rated impulse withstand voltage		U _{imp} 7.3 kV	U _{imp} 7.3 kV
Power frequency withstand voltage		3 kV	3 kV
		OUT7 - OUT9 - OUT10	
Contact type		1 changeover	
Rated current		AC1 - 8A 250 V AC DC1 - 8A 30 V DC AC15 - 1.5A 250 V AC	
Max rated voltage		300 V AC	
Mechanical endurance		10 ⁷ cycles	
Electrical endurance		10 ⁵ cycles	
Rated insulation voltage		U _i 250 V AC	
Rated impulse withstand voltage		U _{imp} 7.3 kV	
Power frequency withstand voltage		3 kV	

4.1 MONITORED PARAMETERS

Value	Parameter	Limits
Voltage	Value	MIN
		MAX
	Delay	MIN
		MAX
Line presence delay	Threshold	MIN
		MAX
Phase failure	without recovery line available	-
	with recovery line available	-
Asymmetry	Threshold	-
	Delay	-
Frequency	Limit	MAX
		MAX
	Delay	MIN
		MAX

Automatic transfer switches Advanced version

4.1 MONITORED PARAMETERS (NEXT)

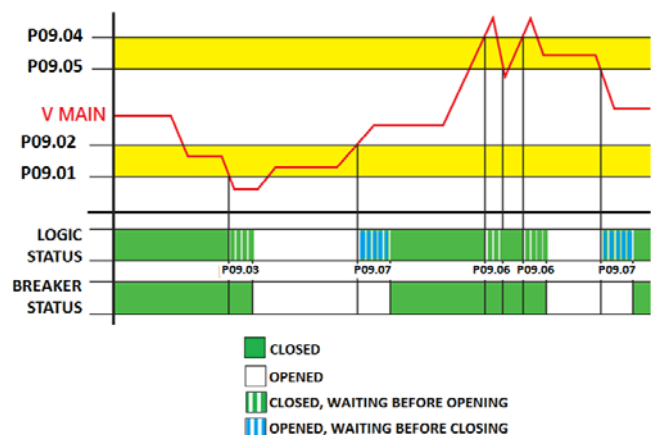

Example of variation of the main line voltage within the minimum and maximum thresholds and relative hysteresis, with indication of the presence / absence delay times. The example considers the secondary line voltage absent with its circuit breaker open, hence the changeover times are not shown. The BREAKER STATUS bar represents the required status of the main line switch, while the LOGIC STATUS bar represents actual logic status of line controller. Px.y identify values to set for ATS (see instruction manual for details) and they correspond to the ones listed into table above on line "Voltage".

4.2 PLC MODE FOR 4 226 83

For 4 226 83 advanced 3 ways driver, it's possible to use Legrand Automatic Control Unit Configurator (see chap. 6.4) to set a ladder program to create a PLC internal logic inside the ATS. In this way, user can create any function necessary to manage any kind of application.


In application program logic, all the variables managed internally by the ATS can be entered, such as inputs, threshold limits, remote variables, controller states , etc... With timers menu it's possible to add timings to application.

The processing results of the different branches of the ladder logic are stored in internal variables, which may later be used to control the outputs, or as support memories to built a more complex logic or to control the alarms defined by the user.

With Legrand Automatic Control Unit Configurator, the operation of the logic created with the ladder program may be real time checked and modified.


4.3 DISPLAY

To enhance and to simplify configuration and navigation, advanced ATSS have a graphic LCD display:

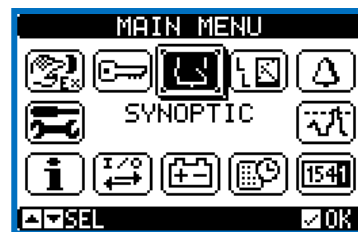

Main menu

Through navigation buttons it's possible to reach any configuration or visualization menu, as, for example, plant synoptic:

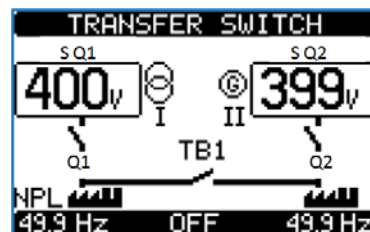

Plant synoptic for 4 226 83

Languages

Advanced ATSS are available with different language packs onboard.

For 4 226 82:

- English (default)
- French
- Spanish
- Russian
- Polish

For 4 226 83:

- English (default)
- French
- Spanish
- Russian
- Polish
- Portuguese
- Italian
- German

ATS


Automatic transfer switches

Advanced version

Reference(s) : 4 226 82/83

4.4 CONTROL PANEL


4 226 82

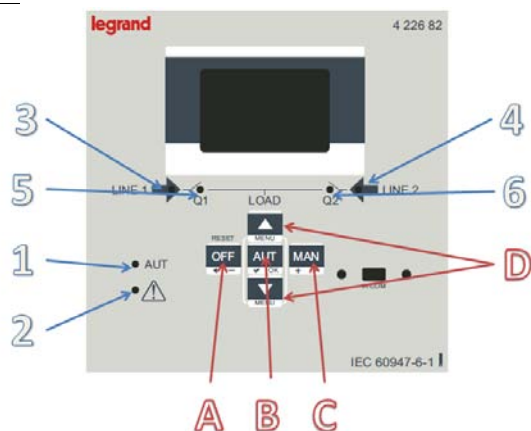

Led	Colour	Status ON	Status OFF	Status BLINK
1	Green	AUTO Mode active	-	-
2	Red	-	-	Alarm active
3,4	Green	Voltage on Line within limits	-	-
5,6	Yellow	Breaker OPEN/CLOSE status	-	Mismatch between Breaker feedback status and set one

Button	Behaviour
A	OFF mode
B	AUTO mode
C	MANUAL mode
D	Navigation and main menu access

4 226 83

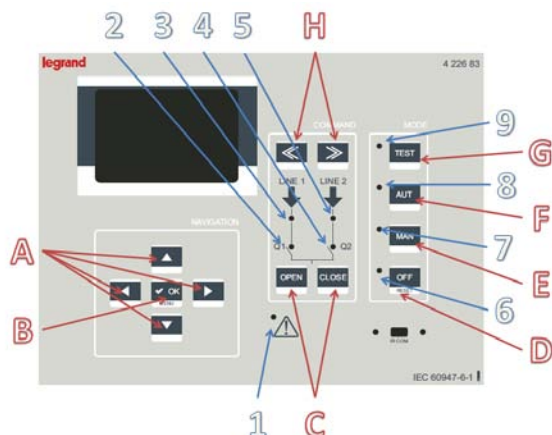


Led	Colour	Status ON	Status OFF	Status BLINK
1	Red	-	-	Alarm active
2,4	Yellow	Breaker OPEN/CLOSE status	-	Mismatch between Breaker feedback status and set one
3,5	Green	Voltage on Line within limits	-	-
6	Yellow	OFF Mode active	-	-
7	Yellow	MANUAL Mode active	-	-
8	Yellow	AUTO Mode active	-	-
9	Yellow	TEST Mode active	-	-

Button	Behaviour
A	Navigation
B	Confirm and main menu
C	Breakers manual command
D	OFF mode and RESET
E	MANUAL mode
F	AUTO mode
G	TEST mode
H	Breakers manual selection


5. CONFORMITY

IEC 60 947-6-1


5.1 MARKING

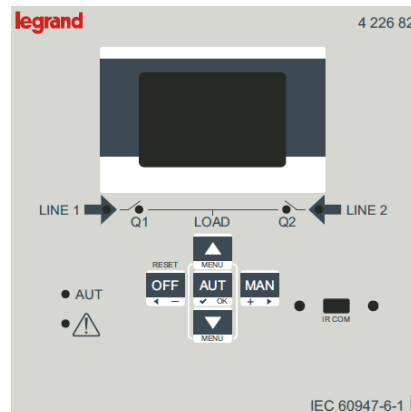

4 226 82 Rear connections

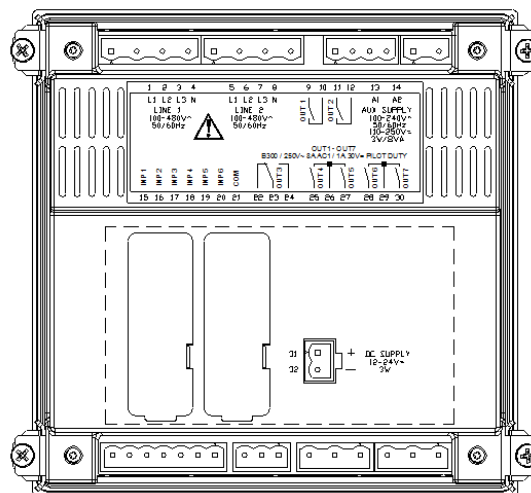

4 226 83 Rear connections

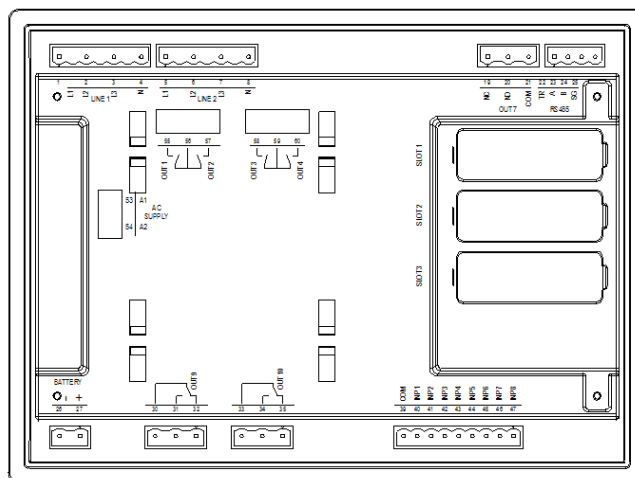

6. EQUIPMENTS AND ACCESSORIES

6.1 Auxiliary power supply

- Auxiliary Dual power supply: it automatically selects the most appropriate source between two single-phase AC power supply lines (based on the presence of voltage within the minimum and maximum preset limits) ref. 4 226 86

4 226 86		
Line 1 and Line 2 voltage inputs	Maximum rated voltage U_n	110 ÷ 230 V AC
	Operating range	80 ÷ 300 V AC
	Frequency range	45 ÷ 66 Hz
	Measuring method	True RMS
	Measuring input impedance	> 8 MΩ L-N
	Power consumption/dissipation	7 VA - 2.4 W
Connection methods		
Power supplied by the system with phase-to-neutral ≤ 300V AC		
Measuring accuracy		±1%
Relay outputs	Contact type	2 x 2 NO (presence Line 1 and Line 2) 1 x 2 CO (relay exchange line)
	Max voltage switching	300 V AC
	Rated voltage	250 V AC
	Mechanical endurance	10 ⁷ cycles
	Electrical endurance	10 ⁵ cycles
	Rated current	4A 250VAC AC1 - 1.5A 250V AC AC15
	Rated insulation voltage	U _i 250 V AC
	Rated impulse withstand voltage	U _{imp} 4.8 kV
	Power frequency withstand voltage	2.21 kV
	Power frequency withstand voltage	2.21 kV
Ambient operating conditions	Operating temperature	-30 °C ÷ +70 °C
	Storage temperature	-30 °C ÷ +80 °C
	Measurement category	III

6.2 Expansion accessories

Plug-in accessories

- 4 opto-isolated static outputs ref. 4 226 90
- 2 relay outputs ref. 4 226 91
- 2 opto-isolated digital inputs and 2 relay outputs ref. 4 226 92


The modules connection can be done simply by plugging them into the expansion slot of the base device which will automatically recognise them. The module parameters setup will be done directly from the main device menu.

Connection procedure

- Remove any dangerous voltage.
- Remove terminal covers and terminal block.
- Remove the expansion slot cover where the module will be plugged in.
- Insert the module into the plug:



- Replace the terminal block and terminal covers.
- Power up the system (the main device will automatically recognise the expansion unit):

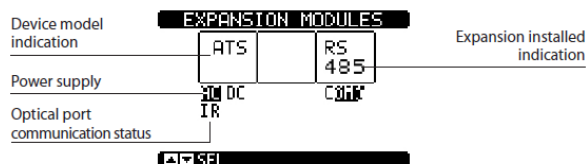


Technical data

4 226 90		
SSR output	Type	Solid state relays
	Output ratings (at 60°C)	40 V DC / 30 V AC 55 mA max
Output connection	Type	Plug in/removable terminals
	Number of terminals	4
	Conductor cross section (min/max)	0.2 - 1.5 mm ² (28 - 14 AWG)
	Tightening torque	0.18 Nm
Insulation	Rated impulse withstand voltage	7.3 kV
	Power frequency withstand voltage	4 kV
	Ambient operating conditions	Operating temperature: -20 °C ÷ +60 °C Storage temperature: -30 °C ÷ +80 °C Degree of protection: IP20

4 226 91		
Relay outputs	Number of outputs	2
	Type	1 changeover
	Rated operating voltage	250 V AC
	Rated current	AC1 5A 250VAC - AC15 1.5A 250V AC, 5A 28 V DC
	Mechanical endurance	10 ⁷ cycles
	Electrical endurance	10 ⁵ cycles
Connection	Type	Plug in/removable terminals
	Conductor cross section (min/max)	0.2 - 2.5 mm ² (28 - 12 AWG)
	Tightening torque	0.5 Nm
Insulation	Rated impulse withstand voltage	7.3 kV (between DMG and outputs) 2.5 kV (between relay outs)
	Power frequency withstand voltage	4 kV (between DMG and outputs) 1.5 kV (between relay outs)
	Ambient operating conditions	Operating temperature: -20 °C ÷ +60 °C Storage temperature: -30 °C ÷ +80 °C Degree of protection: IP20

4 226 92		
Digital inputs	Number of inputs	2
	Type	Negative
	Input current	7 mA
	Input delay	≥ 50ms
	Max frequency (COUNTER cfg)	2 kHz
	Max frequency (STATUS cfg)	50 Hz
	Terminals voltage	5 V DC isolated
Relay outputs	Number of outputs	2
	Type	1 NO
	Rated operating voltage	250 V AC
	Rated current	AC1 5A 250VAC - AC15 0.75A 250V AC, 2A 30 V DC
	Mechanical endurance	10 ⁷ cycles
	Electrical endurance	10 ⁵ cycles
	Terminals voltage	5 V DC isolated
Connection	Type	Plug in/removable terminals
	Conductor cross section (min/max)	0.2 - 2.5 mm ² (24 - 12 AWG)
	Tightening torque	0.5 Nm
Inputs insulation	Rated impulse withstand voltage	4 kV
	Power frequency withstand voltage	2 kV
Outputs insulation	Rated impulse withstand voltage	6.5 kV (contact to low voltage circuits) 4 kV (contact to contact)
	Power frequency withstand voltage	3.6 kV (contact to low voltage circuits) 2.25 kV (contact to contact)
	Ambient operating conditions	Operating temperature: -20 °C ÷ +60 °C Storage temperature: -30 °C ÷ +80 °C Degree of protection: IP20

Module dimensions

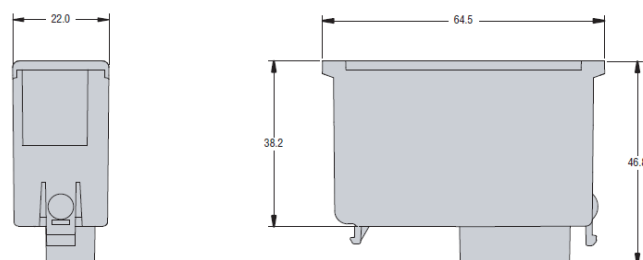

ATS


Automatic transfer switches

Advanced version


Reference(s) : 4 226 82/83

Terminals and connections

4 226 90

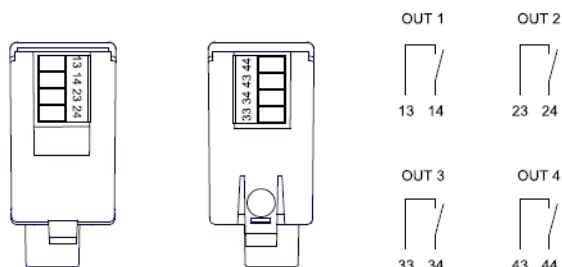


4 226 91

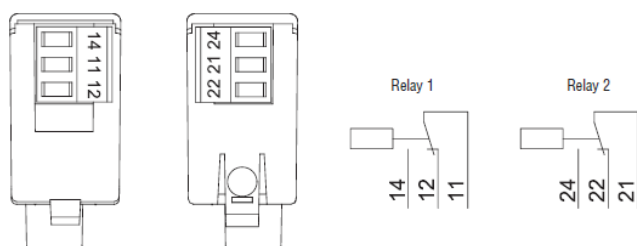


4 226 92

Inputs

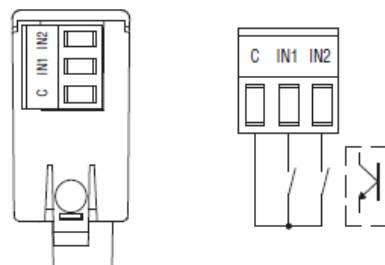

Outputs

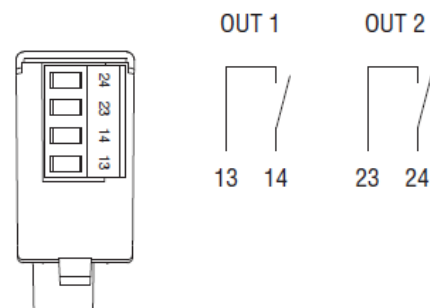

6.3 Communication accessories

Plug-in accessories

- Opto-isolated RS485 interface

ref. 4 226 89


The module connection can be done simply by plugging it into the expansion slot of the base device which will automatically recognise it. The module parameters setup will be done directly from the main device menu.

Connection procedure

1. Remove any dangerous voltage.
2. Remove terminal covers and terminal block.
3. Remove the expansion slot cover where the module will be plugged in.
4. Insert the module into the plug:




5. Replace the terminal block and terminal covers.
6. Power up the system (the main device will automatically recognise the expansion unit):

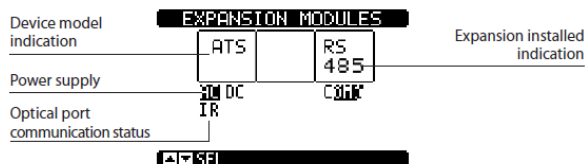

Technical data

4 226 89		
Port connection	Type	Plug in/removable terminals
	Number of terminals	4
	Conductor cross section (min/max)	0.2 - 1.5 mm ² (28 - 14 AWG)
	Tightening torque	0.18 Nm
Insulation	Rated impulse withstand voltage	7.3 kV
	Power frequency withstand voltage	4 kV
	Ambient operating conditions	
Ambient operating conditions	Operating temperature	-20 °C ÷ +60 °C
	Storage temperature	-30 °C ÷ +80 °C
	Degree of protection	IP20

Module dimensions

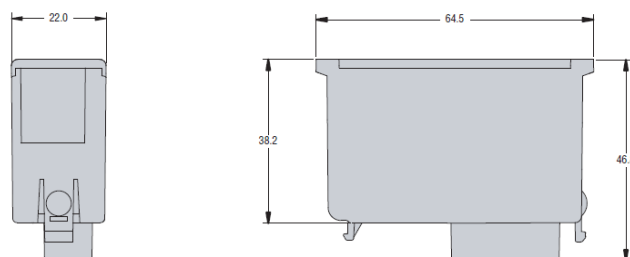


ATS

Automatic transfer switches

Advanced version

Reference(s) : 4 226 82/83

Terminals and connections

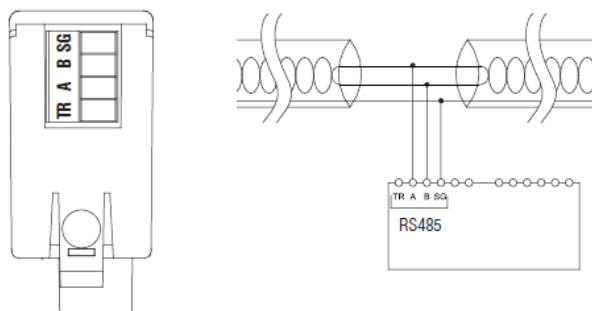


Front side accessories

- USB front connector for programming the automation control units or downloading the event log via PC. Galvanic insulation for safety connections guaranteed by IR communication port toward device.
ref. 4 226 87

- WiFi front connector for programming the automation control units or downloading the event log via PC, smartphone or tablet. Galvanic insulation for safety connections guaranteed by IR communication port toward device.
ref. 4 226 88

Module description

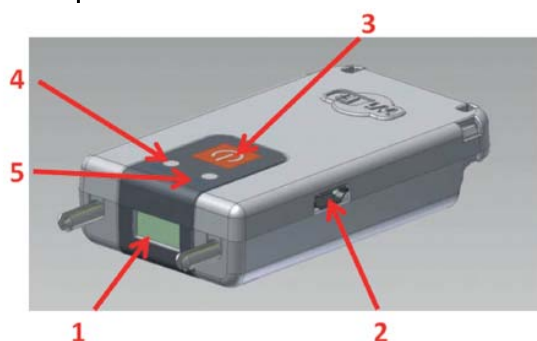

- 1 IR optical port
- 2 Micro USB Connector
- 3 ON/OFF button
- 4 Link state LED
- 5 Battery charge LED

Charging the battery

Before using the device fully charge the battery, leaving it connected to a USB power source until the battery LED will glow green:

Colour	Battery charge status
Red	< 10%
Orange	>10%, < 90%
Green	> 90%

Power on

Press and hold the button for 2 seconds to activate WiFi dongle.

Power off

Press and hold for 3 seconds the button to turn off permanently dongle. The dongle automatically turns off after 30 seconds if it is not placed in front to an active IR port.

Link status LED

Status	IR presence	WiFi status	Data traffic
Red steady	No	-	-
Orange blink	Yes	Connected, Stand-by	-
Orange steady	Yes	Connected, Ready	-
Green steady	Yes	Connected, Active	No
Green blink	Yes	Connected, Active	Yes

Dongle menu

To enter the dongle menu it is necessary to perform the start-up procedure described below:

- Insert the dongle into the IR port of the device with which you want to communicate.
- Switch on dongle on by pressing the button for 2 s.
- Wait until the "Link status" LED becomes orange flashing.
- Press 3 times consecutively and fast the dongle button.

The base device display will show the Dongle menu.

To navigate the menu dongle use the arrow keys on the basic, following the directions of the bar on the last line of the page.

Select the desired command and confirm it.

For each command from D1 to D4 a second confirmation is requested before performing the selected operation:

D1: it allows to download the setup menu from the device to the dongle. The data is saved in non-volatile memory of the dongle. If during the data transfer any error occurs (ex: dongle not perfectly connected to the device), then after the download the display will show error message 'CHECKSUM ERROR – RETRY COMMAND'. In this situation the setup data is not saved. Retry D1 command.

D2: it allows to transfer the data stored in the dongle (with previous command D1) to a different device.

D3: it allows to download all the data of the device (setup, page info, events...) and save it in the non-volatile memory of dongle. If during the data transfer any error occurs (ex: dongle not perfectly inserted in the device IR port) then after the download the display will show error message 'CHECKSUM ERROR – RETRY COMMAND'. In this situation the setup data is not saved. Retry D3 command.

D4: it allows to transfer the data stored in the dongle with the command D3 to a different device.

D5: it shows information about data currently stored in the internal memory of the dongle

ATS

Automatic transfer switches


Advanced version

Reference(s) : 4 226 82/83


Technical data

4 226 88		
Supply	Supply voltage	5 V DC (taken from USB)
	Supply current	400 mA max
	Power consumption/dissipation	2 W
USB		Type B
Battery	Type	Li-Ion
	Rated voltage	3.7 V
	Capacity	700 mA
	Life before recharge	> 5 hours
	Recharging type	Connection to USB host
	Charging current	350 mA max
Ambient operating conditions	Operating temperature	0 °C ÷ +50 °C
	Storage temperature	-20°C ÷ +60°C
	Degree of protection	IP20
IP	Address	1.2.3.4
	Port	2000

Module dimensions

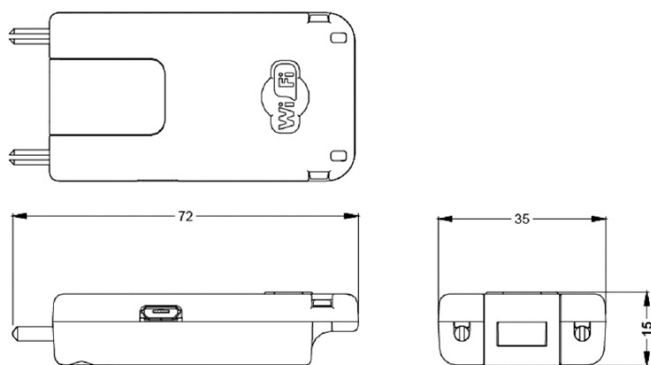

Batteries must be disposed of according to local regulations.
The batteries should not be mixed



6.4 Software and mobile App

Programming software (*Automatic Control Unit Configurator*) available for download via E-catalogue; App (*Automatic Control Unit Configurator*) for smartphone & tablet available on Apple Store and Google Play.

ATS

Automatic transfer switches


Advanced version

Reference(s) : 4 226 82/83


7. SYNOPTICS

Many configurations can be done with advanced ATS drivers. Here below some schematics.

4 226 82




4 226 83

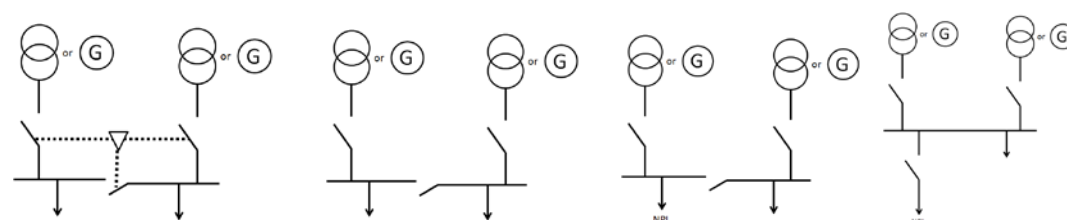

For every possible setup, a range of example synoptic is available on Legrand e-Catalogue. Besides synoptic, parameters configuration files for every product is available on e-Catalogue. Synoptics and configuration files are for free download.

7.1 UNDERVOLTAGE RELEASE MANAGED BY 4 226 82

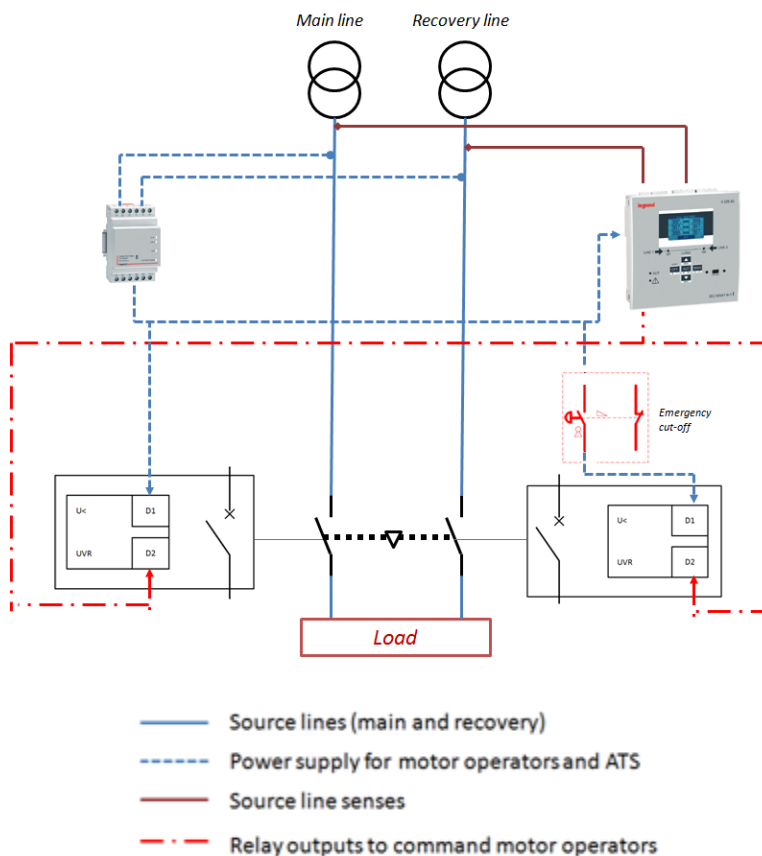


ATS

Automatic transfer switches


Advanced version

Reference(s) : 4 226 82/83

7.2 DIRECT COMMAND WITH FEEDBACK FOR DPX³ 160 AND DPX³ 250 WITH 4 226 82

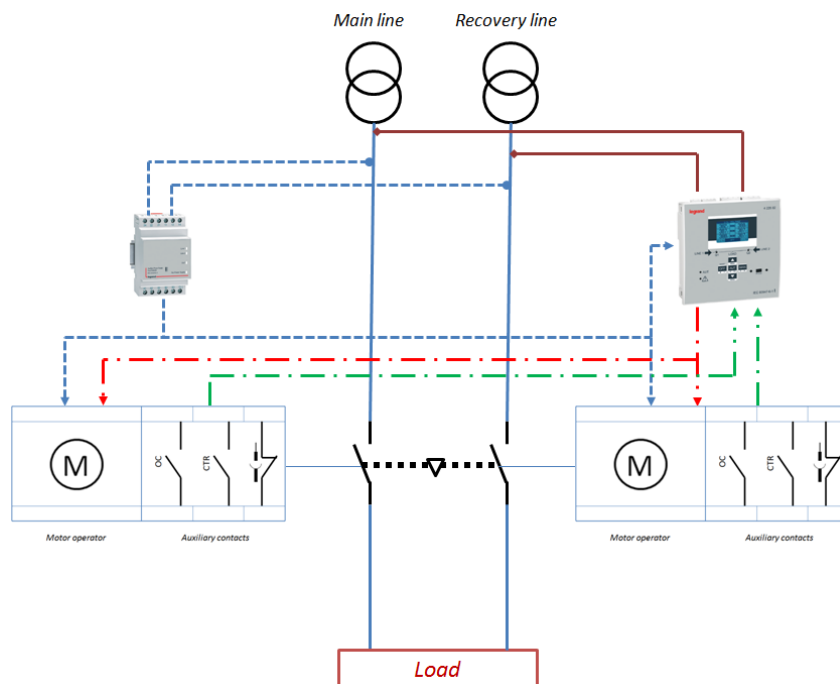

7.3 DIRECT COMMAND WITH FEEDBACK FOR DPX³ 630 WITH 4 226 82

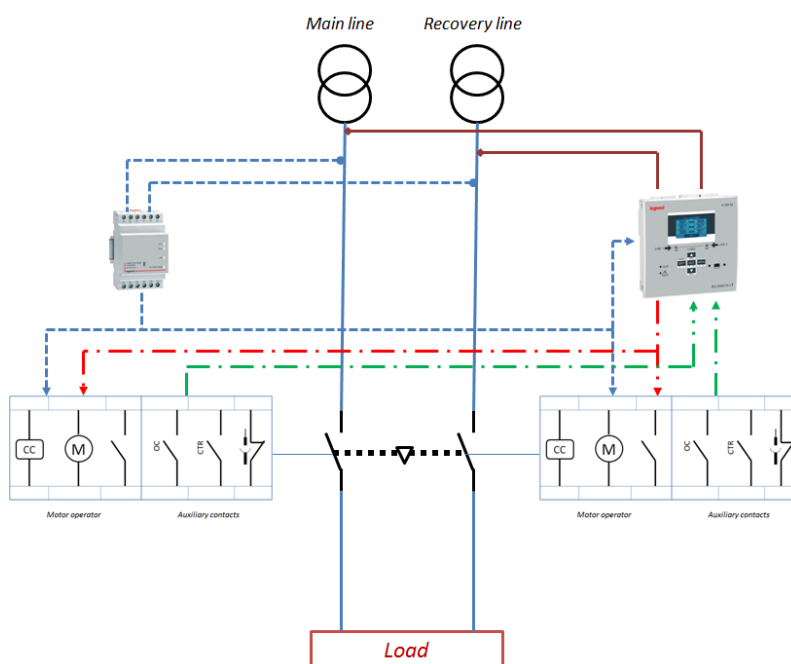

- Source lines (main and recovery)
- - - Power supply for motor operators and ATS
- Source line senses
- . - Auxiliary digital inputs for feedbacks on ATS
- . - Relay outputs to command motor operators


ATS

Automatic transfer switches


Advanced version

Reference(s) : 4 226 82/83

7.4 FAST CLOSING OPERATION COMMAND WITH FEEDBACK FOR DPX³ 1600 WITH 4 226 82

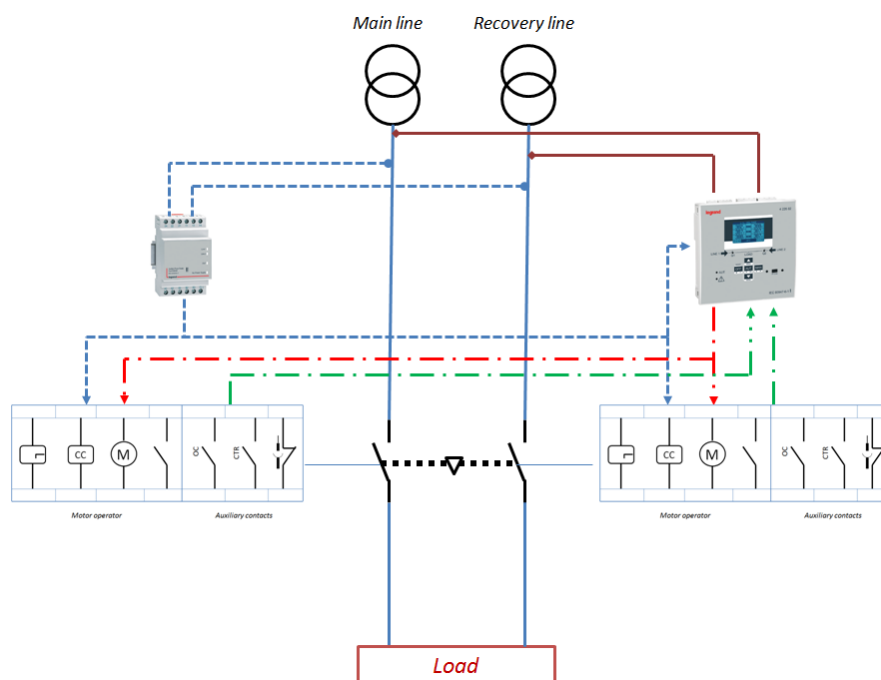

7.5 DMX³ WITH FEEDBACK WITH 4 226 82

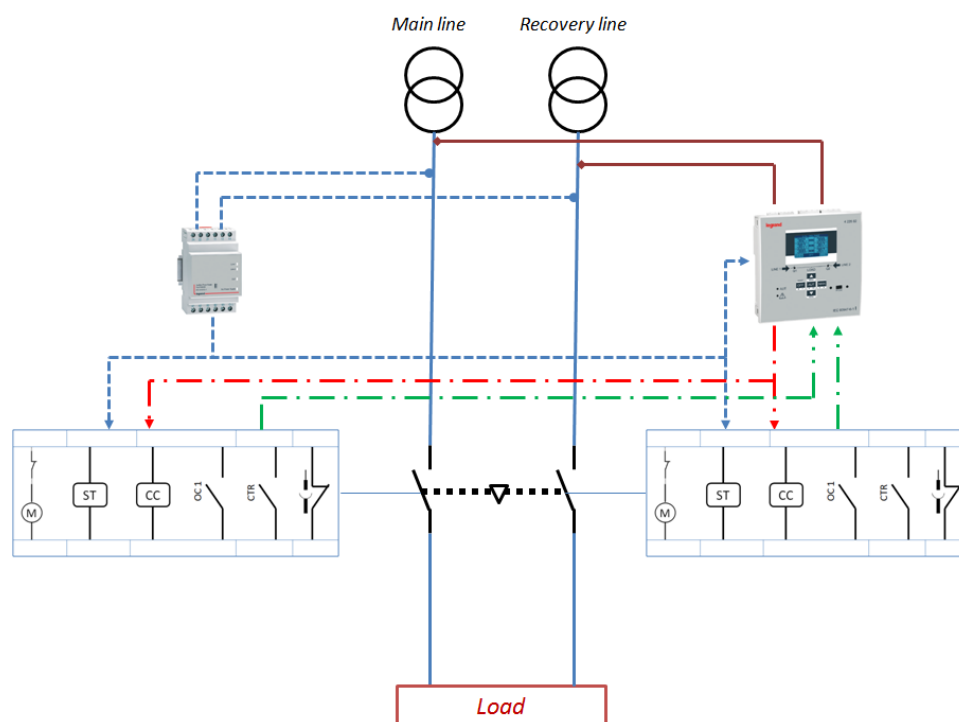

- Source lines (main and recovery)
- - - Power supply for motor operators and ATS
- Source line senses
- · - Auxiliary digital inputs for feedbacks on ATS
- · - Relay outputs to command motor operators


ATS

Automatic transfer switches


Advanced version

Reference(s) : 4 226 82/83

7.6 COMMANDS FOR CTX³ WITH 4 226 82

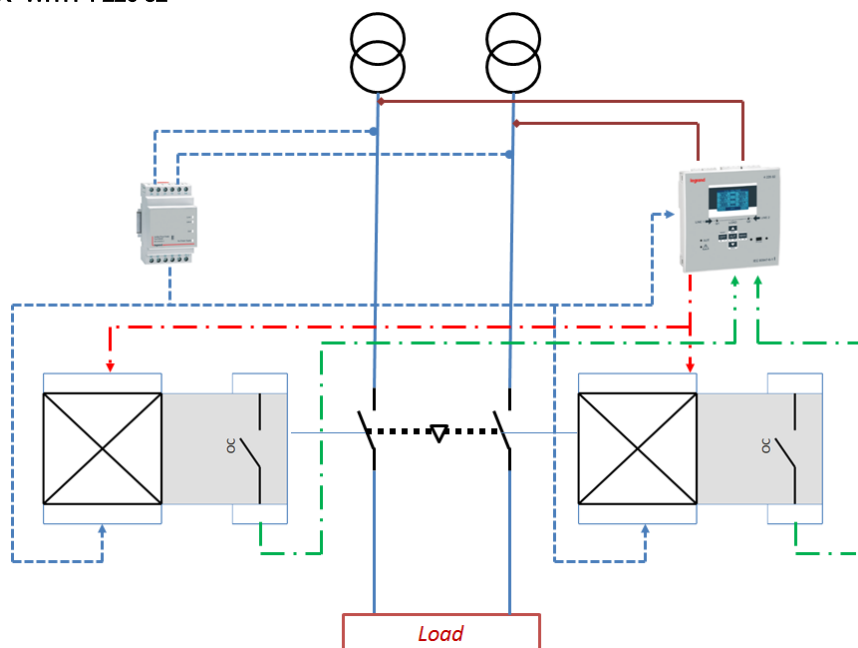

7.7 MANAGEMENT WITH FEEDBACK FOR 4 226 83

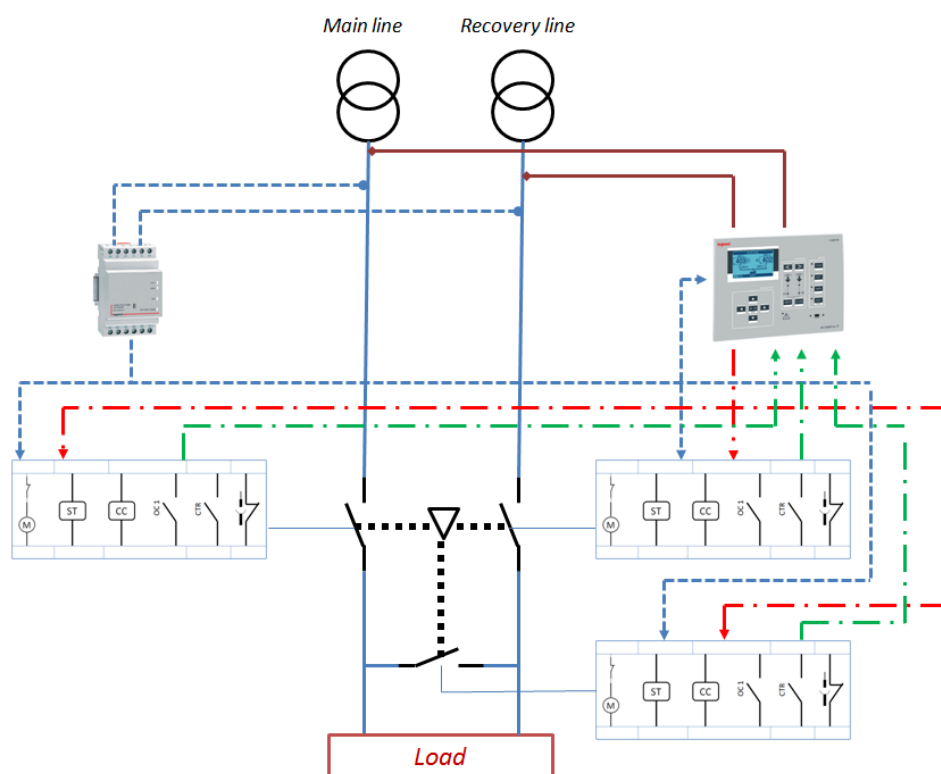

- Source lines (main and recovery)
- - - Power supply for motor operators and ATS
- Source line senses
- . - Auxiliary digital inputs for feedbacks on ATS
- . . Relay outputs to command motor operators

Automatic transfer switches

Advanced version

8. SOURCE PRIORITIES

Main line	Secondary line	
		DEFAULT

9. OPEN OR CLOSED TRANSITION

Transfer switch equipment can be categorized into two general groups:


- Open-transition transfer devices: open the connected source before closing the new source, causing a total power interruption for a short period of time;
- Closed-transition transfer devices: operate like an open-transition transfer switch when a source has failed, but will parallel the two sources for 100 milliseconds or less and then disconnect when both sources are available, so a total interruption of power is avoided.

4226 83 ATS driver can manage both open and closed transitions, while 4 226 82 can manage only open one.

Open-transition transfer switches

Open-transition transfer switches provide a “break before-make” switching action. They are specifically designed to transfer power between main line and recovery line. The connection to one source is opened before the connection to the second source is closed (a black-out period must occur on loads during transition).

Mechanical interlocks that positively prevent interconnection of sources in automatic and manual modes are commonly used. Open-transition transfer switches are the most commonly used type of transfer switch and are used in all types of applications. By design, they neither require nor allow recovery line paralleling with the main line, in order to have simpler and safer management.

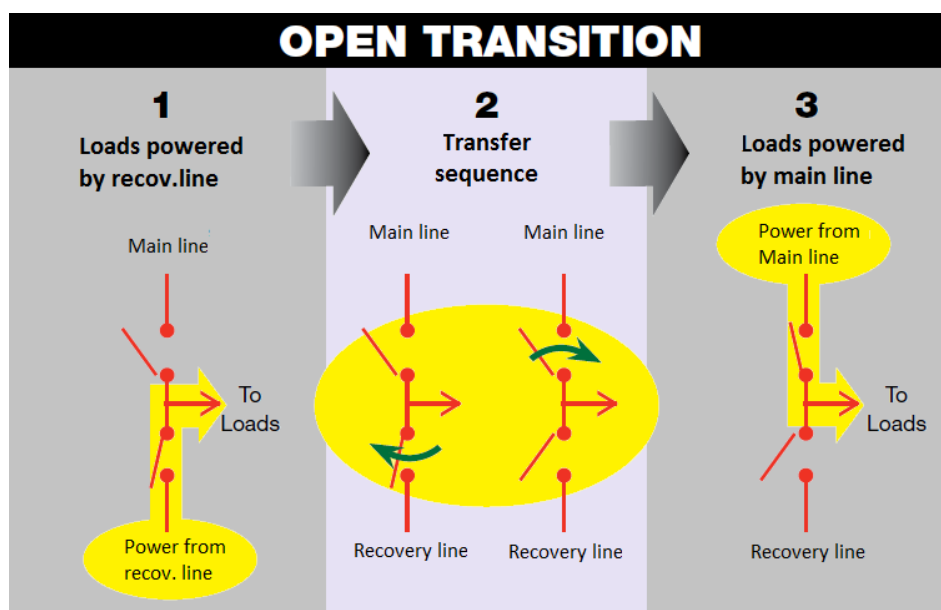

Automatic transfer switches

Advanced version

Closed-transition transfer switches

Closed-transition transfer switches provide a “make-before-break” switching action and utilize a momentary paralleling of both sources, avoiding black out situations on loads.

While fast closed-transition transfer devices switch from sources without a total interruption, there is generally a disturbance in power supplied to the loads due to the sudden load change on the source. This is particularly true when transferring a load from the main line to the recovery one. In general, in order to prevent disruptive transients, fast closed-transition transfer switches must be transferred sequentially, and each switch load should be limited to less than 25 percent of the standby rating of the recovery line.

Due to short timings, this kind of transition is useful in applications with fast motors (as in case of air circuit breakers or DPX³ 1600 with fast closing motor version). So, for closed transitions, a mechanical interlock cannot be compatible.

