


1. USE

Category 6 RJ 45 socket for high speed transmission (Gigabit Ethernet).
The mechanism can be flush-mounted or surface-mounted in 40 mm depth box min.
To be equipped with frame and plates.
Fixing with clips.

2. RANGE

	Pack of 10 Keystone RJ 45 socket Cat. 6 UTP socket with fast connection	0 331 81
---	--	----------

3. DIMENSIONS (mm)

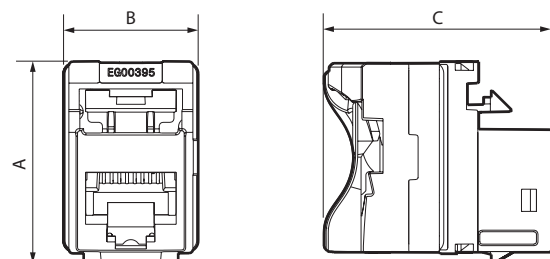


A	B	C
27	18	30

4. CONNECTION

Accepts the following cable connectors:
RJ 11 (4 contacts), RJ 12 (6 contacts), RJ 45 (9 contacts).

Double colour T568A and T568B on terminals:

UTP 8 contacts

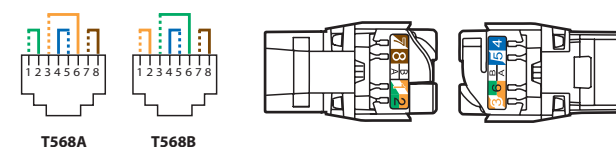


Conductors supported:

AWG 22 single-core cables up to AWG 26 and AWG multicore cables.

Polyethylene conductor insulation: max. Ø 0.85 to 1.7 mm on insulation.

RJ 45 connectors are equipped with a rotation locking that does not require special tool and enables re-wiring in the event of error.



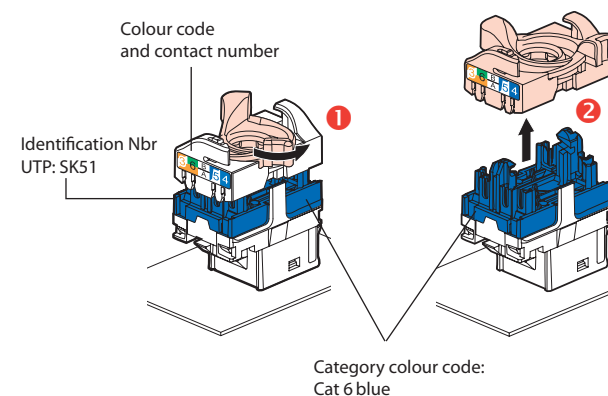


4. CONNECTION *(continued)*

This system allows the wire pairs to be spread easily before mounting them on the connector.

Spreading cables ensures that each pair is separated by the specified 13 mm.

Spreading pairs by 90° in relation to the cable ensures optimum performance.

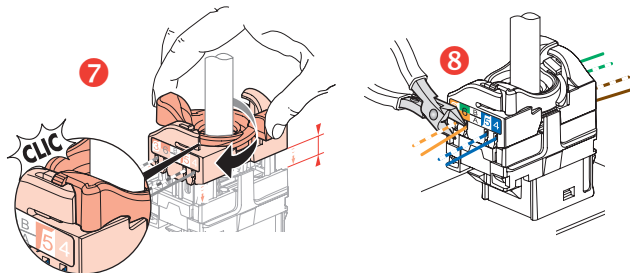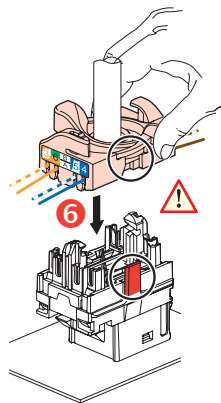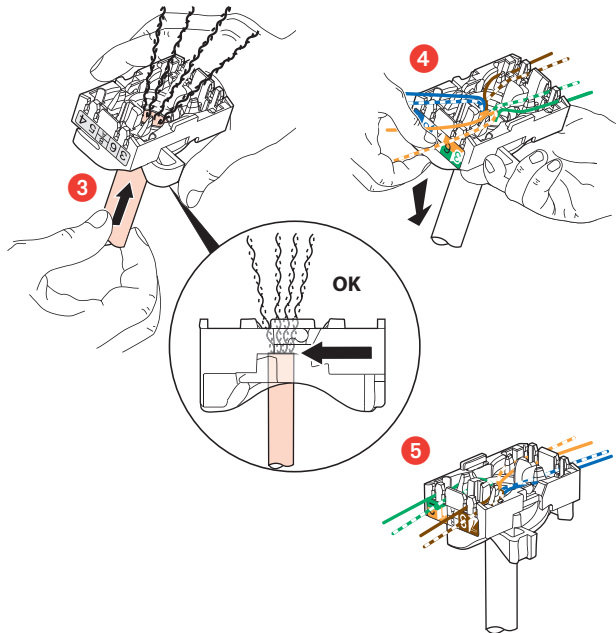

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics

Impact resistance: IK 03

Penetration against solid bodies and liquids: IP 20

Max. number of connections and disconnections: 5 without refreshing the wiring.

Endurance: 2500 movements (plug insertion/withdrawal).

■ 5.2 Material characteristics

Contacts: Gold/nickel, minimum thickness of gold > 0.8 µm

Metal parts: Bronze, nickel, platinum, gold

Base: Polycarbonate

Halogen-free

UV-resistant

Self-extinguishing:

850°C/30 s for insulating components holding live parts in place

650°C/30 s for the other insulating components

■ 5.3 Electrical characteristics

Breakdown voltage ≥ 1000 V

Contact resistance ≤ 20 mΩ

Insulation resistance ≥ 500 mΩ at 100 VDC

Tested and independently certified to comply with IEC 60512-99-001 and IEC 60512-99-002 for PoE support up to 90 W (Type 4).

■ 5.4 Climate characteristics

Storage temperature: -10°C to +70°C

Operating temperature: -10°C to +60°C

6. CLEANING

Clean the surface with a cloth.

Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Caution: Always test before using other special cleaning products.

7. STANDARDS AND APPROVALS


Compatible remote powering IEEE 802.3af, IEEE 802.3at, IEEE 802.3bt: «Power over Ethernet», Type 1 to 4 up to 90 W.

Comply with installation and manufacturing standards.


See e-catalogue.

8. PERFORMANCE


■ 8.1 Component performance (RJ 45 connectors)
Return loss

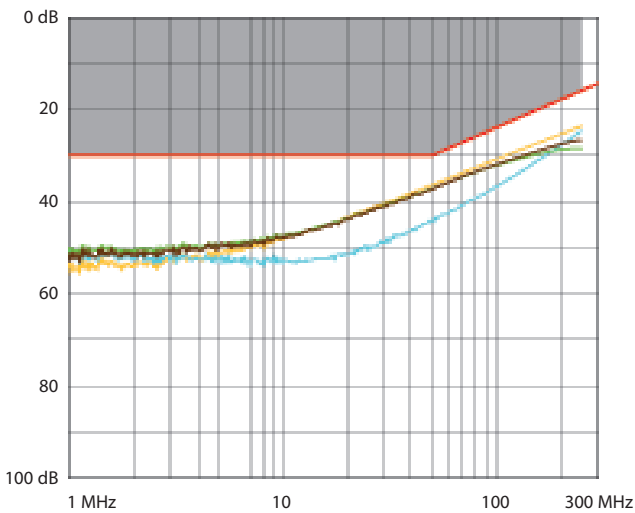

Attenuation

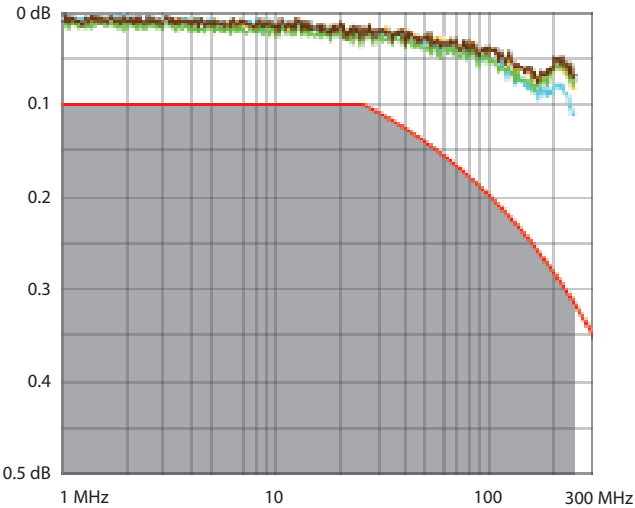


NEXT (Near end Crosstalk Attenuation)

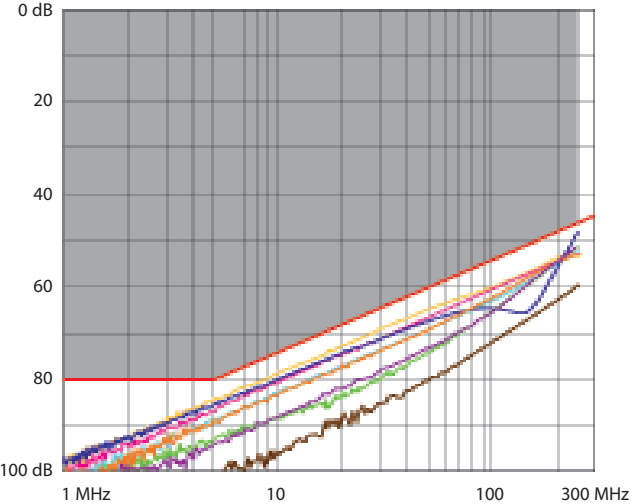


8. PERFORMANCE (Cont.)


■ 8.1 Component performance (RJ45 connectors) (cont.)
FEXT (Far end Crosstalk Attenuation)

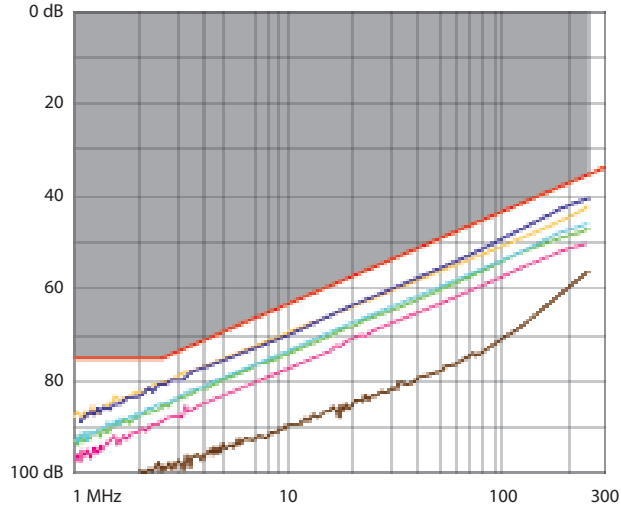

■ 8.2 Permanent link performance with F/UTP cable
Return loss

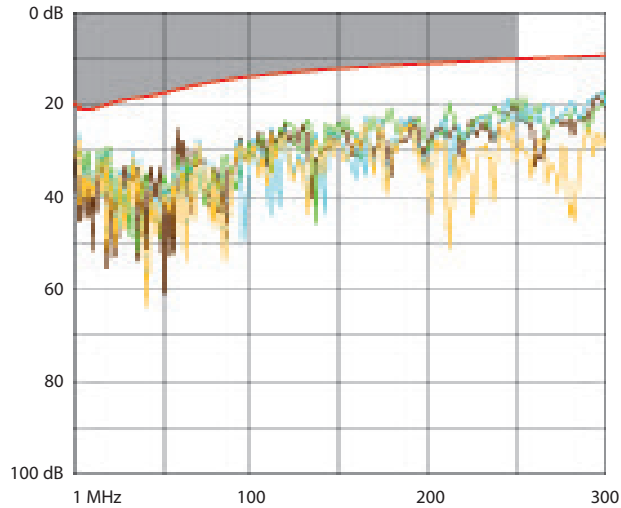


Attenuation

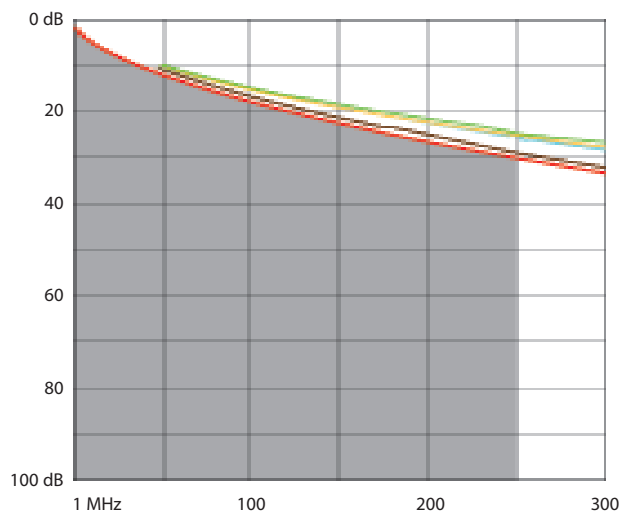


8. PERFORMANCE (Cont.)


■ 8.2 Permanent link performance with F/UTP cable (cont.)
NEXT (Near end Crosstalk Attenuation)

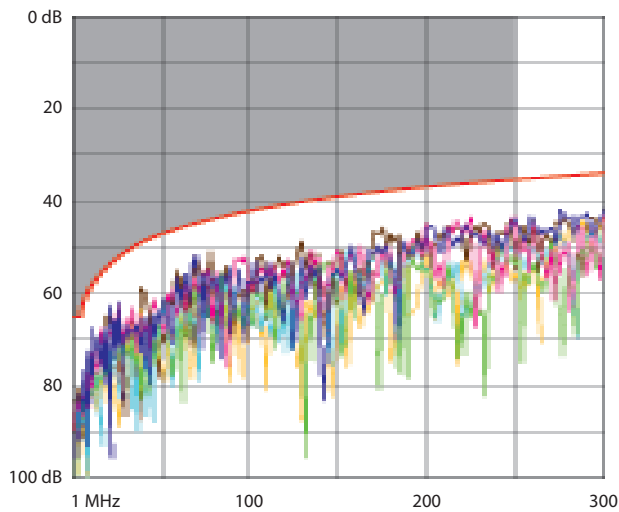

PS NEXT (Power Sum NEXT)

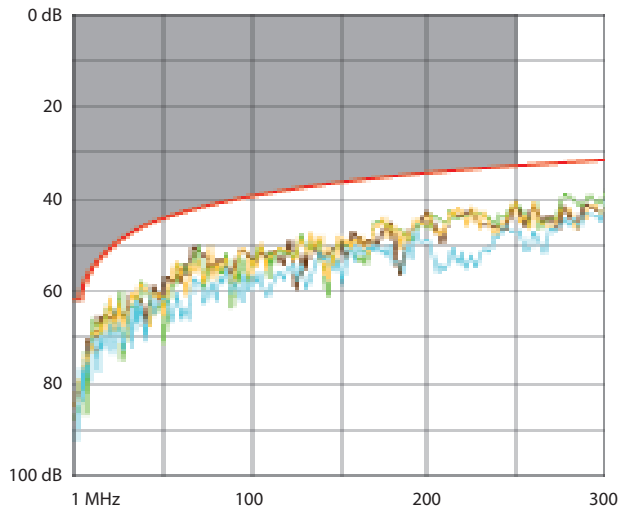


ACR (Attenuation to Crosstalk Ratio)

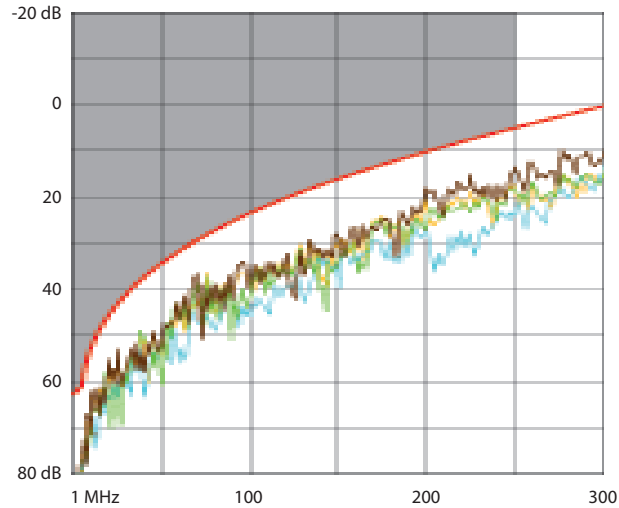

8. PERFORMANCE (Cont.)

■ 8.2 Permanent link performance with F/UTP cable (cont.)
ELFEXT (Equal Level End Crosstalk Attenuation)

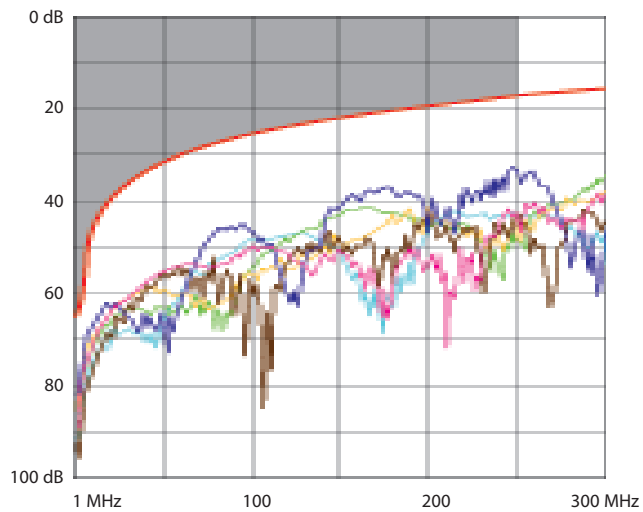

Delay skew

