

Data Sheet

General and Commercial Data

Product Type	Interiors - Recessed Luminaires
Model	X-Six LED
Code	71060
Description	X-SIX DOWNLIGHT LED CCT 20W
EAN Code	8002219743909
Available Colors	White RAL 9010
Application	Offices, Shops
Net Weight [kg]	0.5
Dimensions [mm]	240x35
Pieces per Pack	20

Technical Characteristics

Volume [m3]	0.0026
Insulation Class	II
IP Code	20
Impact Resistance IK Rating	5
Fire Resistance [°C]	550
Voltage [V]	230
Frequency [Hz]	50
Power Factor (cos(φ))	0.55
Luminaire Power [W]	20
Battery Life [h]	---
Luminaire Flux [lm]	1600
Luminous Efficacy [lm/W]	81
Range Ambient Temperature [°C]	-10 ÷ 40
Ballast	For constant current LED
Source	CCT 3000 K - CRI 80
Average Life [h]	30000
Source Flux [lm]	1600

Photometric Parameters


Measurement	71060o_3000K
CIE Code	[46,78,95,100,100]
Optics Type	Symmetrical

Notes


Possible Flux configurations [lm]: 1600
 Possible Power configurations [W]: 20
 Possible CCT configurations [K]: 3000/4000/6500

Norms

CEI EN 60598-2-2
 2014/35/EU
 2014/30/EU
 874/2012/CE
 2009/125/CE
 EN 62471
 CEI EN 60598-1



Potenza W	• Dimensioni (mm) • Ø	H	Foro incasso mm	Peso kg
20	240	35	Ø 225	0,5

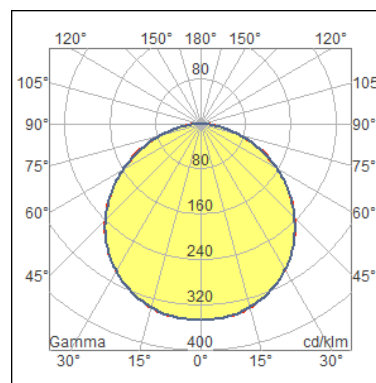

Marks

