

Data Sheet

General and Commercial Data

Product Type	Interiors - Recessed Luminaires
Model	Downlight IP54
Code	40327
Description	DWL IP54 35W 75° C90 SAT SD 4K
EAN Code	8002219755957
Available Colors	White RAL 9010
Application	Offices,Public Areas,Shops,Commercial Areas
Net Weight [kg]	1.2
Dimensions [mm]	230x120
Pieces per Pack	4

Technical Characteristics

Volume [m3]	0.008575
Insulation Class	II
IP Code	54
Impact Resistance IK Rating	5
Fire Resistance [°C]	650
Material	Die-cast aluminium
Voltage [V]	230
Frequency [Hz]	50
Power Factor (cos(φ))	0.96
Luminaire Power [W]	35
Battery Life [h]	---
Luminaire Flux [lm]	3500
Luminous Efficacy [lm/W]	101
Range Ambient Temperature [°C]	-20 ÷ 40
Ballast	Constant current LED Smart driver (programmable)
Source	CCT 4000 K - CRI 90
Average Life [h]	80000
Source Flux [lm]	3500
Photobiological Risk Index (EN 62471)	Risk 0

Photometric Parameters


Measurement	40327o
CIE Code	[57,90,99,100,100]
Optics Type	Symmetrical

Notes


Possible Flux configurations [lm]: 3500
Possible Power configurations [W]: 35
Possible CCT configurations [K]: 4000

Norms

2014/35/EU
2014/30/EU
874/2012/CE
2009/125/CE
EN 62471
CEI EN 60598-1
CEI EN 60598-2-2

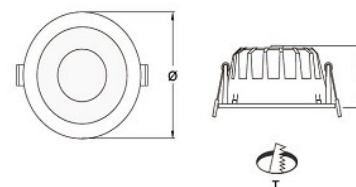

Codice Ordine	• Dimensioni (mm) •			Peso kg
Ø	H	T		
40324-40304	102	68	ø90	0.3
40325-40305	140	68	ø120	0.5
40326-40306	180	90	ø150	0.7
40327-40307	230	120	ø200	1.2

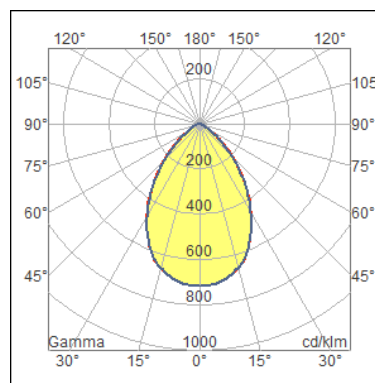

Marks

