

Data Sheet


General and Commercial Data

Product Type	Interiors - Recessed Luminaires
Model	DWL Ultrathin SQ LED
Code	75355
Description	ULTRATHIN DWL SQ LED 24W
	4000K
EAN Code	8002219754868
Available Colors	White RAL 9010
Application	Offices, Shops
Net Weight [kg]	0.5
Dimensions [mm]	270x270x28
Pieces per Pack	25



Technical Characteristics

Volume [m3]	0.003248
Insulation Class	II
IP Code	20
Impact Resistance IK Rating	5
Fire Resistance [°C]	550
Voltage [V]	230
Frequency [Hz]	50
Power Factor (cos(φ))	0.55
Luminaire Power [W]	24
Battery Life [h]	---
Luminaire Flux [lm]	2000
Luminous Efficacy [lm/W]	84
Range Ambient Temperature [°C]	-10 ÷ 40
Ballast	For constant current LED
Source	CCT 4000 K - CRI 80
Average Life [h]	30000
Source Flux [lm]	2000




Potenza W	• Dimensioni (mm) •			Foro incasso mm	Peso kg
12	170	170	25	155	0,2
18	202	202	25	185	0,3
24	270	270	28	250	0,5

Photometric Parameters

Measurement	75355o
CIE Code	[46,78,95,100,100]
Optics Type	Symmetrical

Notes

Possible Flux configurations [lm]: 2000
 Possible Power configurations [W]: 24
 Possible CCT configurations [K]: 4000

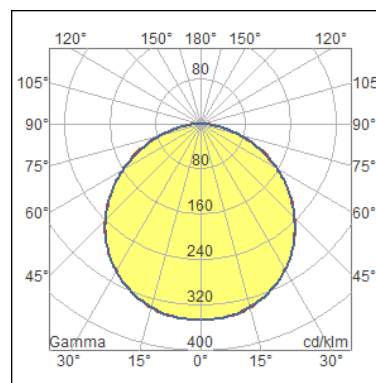

Norms

CEI EN 60598-2-2
 874/2012/CE
 2009/125/CE
 EN 62471
 CEI EN 60598-1

Marks

