


Data Sheet

General and Commercial Data


Product Type	Exteriors/Interiors - Waterproof luminaires
Model	Stagna LED ES
Code	75455
Description	STAGNALED ES-1500 40W6K5 4800L
EAN Code	8002219748164
Available Colors	Grey RAL 7035
Application	Offices,Production,Warehouses
Net Weight [kg]	1.9
Dimensions [mm]	1500x66x58
Pieces per Pack	12



Potenza* W	• Dimensioni (mm) •			Peso kg
L	B	H		
18	600	66	58	0,9
36	1200	66	58	1,5
48	1500	66	58	1,9

Technical Characteristics

Volume [m3]	0.00525
Insulation Class	II
IP Code	65
Impact Resistance IK Rating	5
Fire Resistance [°C]	550
Voltage [V]	230
Frequency [Hz]	50
Power Factor (cos(φ))	0.9
Luminaire Power [W]	48
Battery Life [h]	---
Luminaire Flux [lm]	4800
Luminous Efficacy [lm/W]	101
Range Ambient Temperature [°C]	-20 ÷ 40
Ballast	For constant current LED
Source	CCT 6500 K - CRI 80
Average Life [h]	25000
Source Flux [lm]	4800

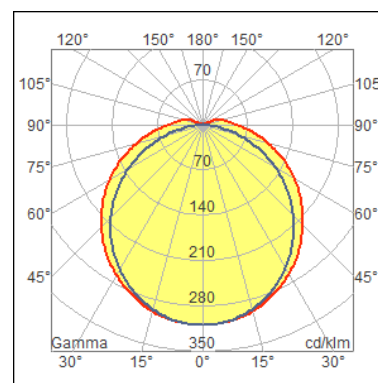

Photometric Parameters

Measurement	75455o
CIE Code	[46,78,95,100,100]
Optics Type	Symmetrical

Notes

Possible Flux configurations [lm]: 4800
Possible Power configurations [W]: 48
Possible CCT configurations [K]: 6500

Norms

CEI EN 60598-2-2
CEI EN 60598-2-5
2014/35/EU
2014/30/EU
874/2012/CE
2009/125/CE
EN 62471

Marks

