

Data Sheet


General and Commercial Data

Product Type	Interiors - Recessed Luminaires
Model	Led Panel RTI
Code	40151
Description	PAN RTI M600 25W U19C90 ED4K
EAN Code	8002219757883
Available Colors	Signal White RAL 9003
Application	Offices,Public Areas,Didactic Areas,Commercial Areas
Net Weight [kg]	1.9
Dimensions [mm]	595x595x34
Pieces per Pack	6



Technical Characteristics

Volume [m3]	0.014762
Insulation Class	I
IP Code	20
Impact Resistance IK Rating	5
Fire Resistance [°C]	960
Material	Sheet steel epoxy coated
Voltage [V]	230
Frequency [Hz]	50
Luminaire Power [W]	24
Battery Life [h]	---
Luminaire Flux [lm]	3400
Luminous Efficacy [lm/W]	142
Range Ambient Temperature [°C]	-20 ÷ 40
Ballast	For constant current LED
Source	CCT 4000 K - CRI 90
Average Life [h]	100000
Source Flux [lm]	3400
Photobiological Risk Index (EN 62471)	Risk 0

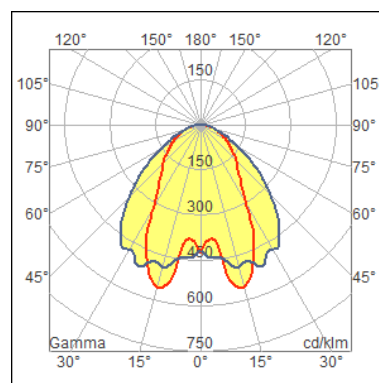

Marks



Photometric Parameters

Measurement	40151o
CIE Code	[57,90,99,100,100]
Optics Type	Symmetrical

Notes

Possible Flux configurations [lm]: 3400
 Possible Power configurations [W]: 24
 Possible CCT configurations [K]: 4000

Norms

2014/35/EU
 2014/30/EU
 874/2012/CE
 2009/125/CE
 EN 62471
 CEI EN 60598-1
 CEI EN 60598-2-2