



Przeznaczenie produktu

Rezystory
hamowania do
VF
ROF

Seria produktu

Charakterystyka ogólna

Znamionowa moc wyjściowa

kW 3.7...5.5

Obudowa

Stopień ochrony IP

IP20

Masa

Kg 0.61

Wymiary

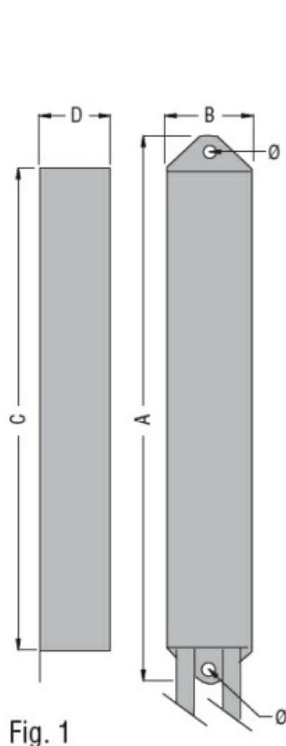


Fig. 1

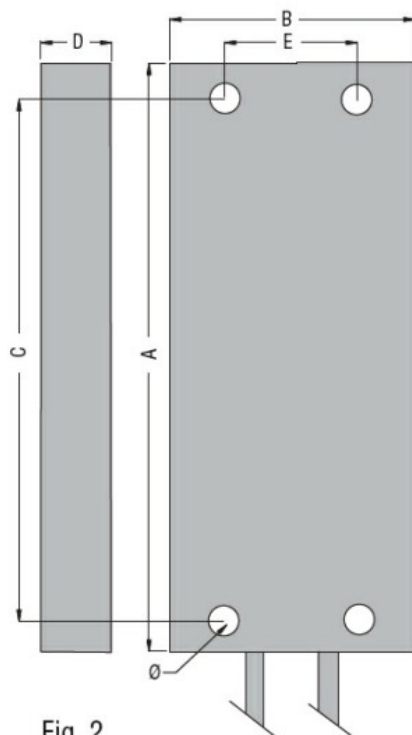


Fig. 2

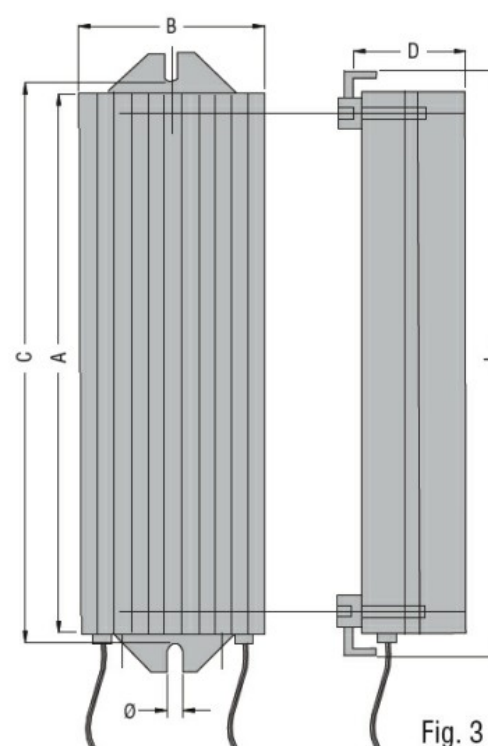


Fig. 3

Type	ROF 20	ROF 35	ROF 50	ROF 80
Fig.	1	2	2	3
A	192 (7.56")	169 (6.65")	299 (11.77")	240 (9.45")
B	30 (1.18")	80 (3.15")	80 (3.15")	80 (3.15")
C	180 (7.09")	140 (5.51")	180 (7.09")	254 (10")
D	25 (0.98")	20 (0.79")	20 (0.79")	52 (2.05")
E	—	45 (1.77")	45 (1.77")	—
L	—	—	—	275 (10.83")
Ø	5 (0.20")	5 (0.20")	5 (0.20")	6 (0.24")

Certyfikaty i zgodność

Zgodność

IEC/EN 60204-1

IEC/EN 60664-1

Certyfikaty

EAC

Klasyfikacja ETIM

ETIM 8,0

EC002498 -
Akcesoria/części
do aparatury
niskonapięciowej