



Dławiki trójfazowe
do VF
IND

Przeznaczenie produktu

Seria produktu

Charakterystyka ogólna

Znamionowy prąd wyjściowy	A	12
Znamionowa moc wyjściowa	kW	0.75...4

Warunki otoczenia

Temperatura


Temperatura pracy

min.	°C	-25
maks.	°C	+100

Obudowa

Masa	Kg	1.85
------	----	------

Wymiary

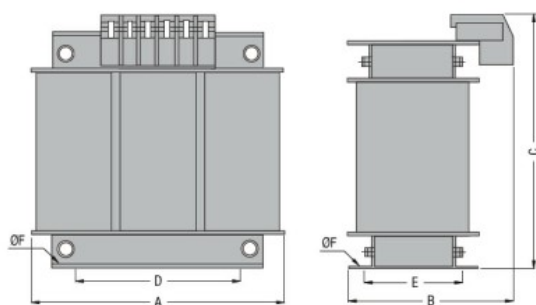

Type	A	B	C	D	E	ØF
IND2020	115 (4.53")	80 (3.15")	125 (4.92")	78 (3.07")	55 (2.16")	5.5 (0.22")
IND2030	115 (4.53")	90 (3.54")	125 (4.92")	78 (3.07")	65 (2.56")	5.5 (0.22")
IND3040	170 (6.69")	115 (4.53")	190 (7.48")	115 (4.53")	85 (3.35")	6.5 (0.25")
IND4040	240 (9.45")	135 (5.31")	230 (9.05")	146 (5.75")	80 (3.15")	8.5 (0.33")
IND4075	240 (9.45")	170 (6.69")	220 (8.66")	146 (5.75")	105 (4.13")	8.5 (0.33")
IND4090	240 (9.45")	195 (7.68")	220 (8.66")	146 (5.75")	120 (4.72")	8.5 (0.33")
IND5060	350 (13.78")	170 (6.69")	325 (12.79")	240 (9.45")	105 (4.13")	12.5 (0.49")
IND5080	350 (13.78")	190 (7.48")	325 (12.79")	240 (9.45")	125 (4.92")	12.5 (0.49")
IND7070	440 (17.32")	200 (7.87")	420 (16.53")	245 (9.64")	120 (4.72")	12.5 (0.49")

Certyfikaty i zgodność

Zgodność

IEC/EN 61558-1

Certyfikaty

EAC

Klasyfikacja ETIM

ETIM 8,0

EC002565 -
Dławik filtrujący
do sieci niskiego
napięcia