

Data Sheet

General and Commercial Data

Product Type	Exteriors - Floodlights
Model	FH-L
Code	40861
Description	PRO/RIF 150W REGOLABILE 4K
EAN Code	8002219860514
Available Colors	Grey
Net Weight [kg]	8.8
Dimensions [mm]	434x438x121

Technical Characteristics

Volume [m3]	0.03267
Insulation Class	I
IP Code	66
Impact Resistance IK Rating	9
Fire Resistance [°C]	960
Material	Die-cast aluminium
Voltage [V]	230
Frequency [Hz]	50
Power Factor (cos(φ))	0.98
Luminaire Power [W]	151
Battery Life [h]	---
Luminaire Flux [lm]	23143
Luminous Efficacy [lm/W]	154
Range Ambient Temperature [°C]	-20 ÷ 40
Ballast	For constant current LED
Source	CCT 4000 K - CRI 80
Average Life [h]	70000
Source Flux [lm]	23143
Photobiological Risk Index (EN 62471)	Risk 0

Photometric Parameters


Measurement	40861o_151W_SYMMETRIC
CIE Code	[57,90,99,100,100]
Optics Type	Symmetrical/Asymmetrical

Notes

Possible Flux configurations [lm]: 23143/20266/17380/14229
 Possible Power configurations [W]: 151/128/107/85
 Possible CCT configurations [K]: 4000

Norms

2014/35/EU
 2014/30/EU
 874/2012/CE
 2009/125/CE
 EN 62471
 CEI EN 60598-1
 CEI EN 60598-2-5

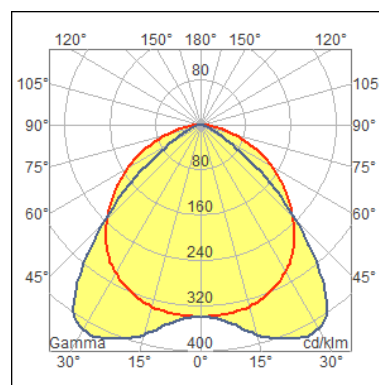

Marks

