


BS100 LED Regolabile



BS100 LED REG HV S670 4K

Beghelli Code: **40003H**

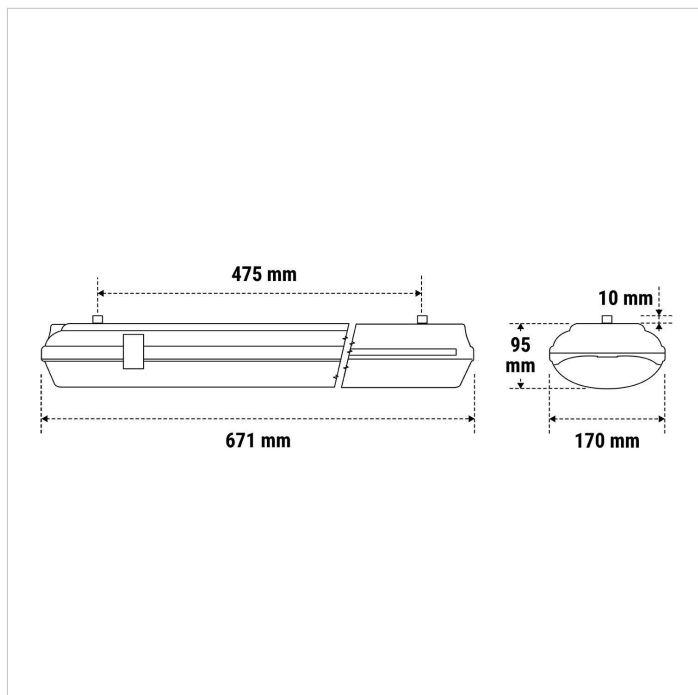

SYSTEM:RD



Description: Lighting

EAN: 8002219889218

ELECTRICAL AND LIGHTING TECHNICAL CHARACTERISTIC

EQUIVALENT POWER: 2x18w

SUPPLY VOLTAGE TYPE: AC

NOMINAL VOLTAGE AC: 230 V

VOLTAGE SUPPLY RANGE AC: 207 V÷253 V

FREQUENCY SUPPLY RANGE: 50 Hz÷60 Hz

POWER FACTOR (Cos ϕ): 0.98

ABSORBED POWER: 34 / 29 / 24 / 19 W

FLUX: 5500 / 4700 / 4000 / 3200 lm

EFFICIENCY: 162 / 162 / 167 / 168 lm/W

Ta: -20 °C÷40 °C

INSULATION CLASS: I

CRI: 80

CCT: 4000 K

COLOR CONSISTENCY (SDCM): SDCM3

LUMINOUS FLUX MAINTENANCE L80/B20: 60000 h

LED NUMBER: 86

DRIVER TYPE: For constant current LED

DRIVER LIFE MTBF: 60000 h

DIMMER TYPE: RD

INRUSH: 13.5 A,0.17 ms

QUANTITY BREAKER: B10 16 , **B16** 28

QUANTITY BREAKER: C10 30 , **C16** 45

THD: 20 _

PHOTOBIOLOGICAL RISK: RG0

MOUNTING AND APPLICATIONS

MOUNTING: Wall / Ceiling / Suspension / Electrified rail

ENVIRONMENT: Indoor/Outdoor

APPLICATION: Industrial Areas / Production / Warehouses

HACCP: y

MECHANICAL CHARACTERISTICS

Dimension: Height: 95 mm **Length:** 671 mm **Width:** 170 mm

PRODUCT WEIGHT: 1.4 kg

BODY MATERIAL: Polycarbonate **COLOUR** Grey RAL 7035

COVER / DIFFUSER MATERIAL: Transparent Photoengraved Polycarbonate **FINITURE** Opale

REFLECTOR MATERIAL: Sheet steel **COLOUR** White

PROTECTION DEGREE: IP65

MECHANICAL IMPACTS PROTECTION DEGREE: IK05

GLOW WIRE: 850° - 30s.

QUANTITY PER BOX SINGLE/MULTIPLE/DELIVERY: 1//

CERTIFICATES AND STANDARDS

STANDARDS: CEI EN 60598-2-1, CEI EN 60598-1, EN 62471, 2009/125/CE, 874/2012/CE, 2014/30/EU, 2014/35/EU

BS100 LED Regolabile



BS100 LED REG HV S670 4K

SYSTEM:RD

Beghelli Code: **40003H**

