


Karta danych technicznych Quick-Schelle, flammwidrig



Typ	Rozmiar znamionowy	Kolor	Opakowanie 3 (wersja karton)	Opak. szt.	Waga kg/100 szt.	Nr kat.
2955 F M16 RW	M16	czysta biel; RAL 9010	1200	100	0.252	2149351
2955 F M20 RW	M20	czysta biel; RAL 9010	1200	100	0.325	2149357
2955 F M25 RW	M25	czysta biel; RAL 9010	1200	100	0.433	2149363
2955 F M32 RW	M32	czysta biel; RAL 9010	600	50	0.630	2149369
2955 F M40 RW	M40	czysta biel; RAL 9010	600	50	0.835	2149375
2955 F M50 RW	M50	czysta biel; RAL 9010	300	25	1.454	2149381

PP polipropylen

Q zł/100 szt.

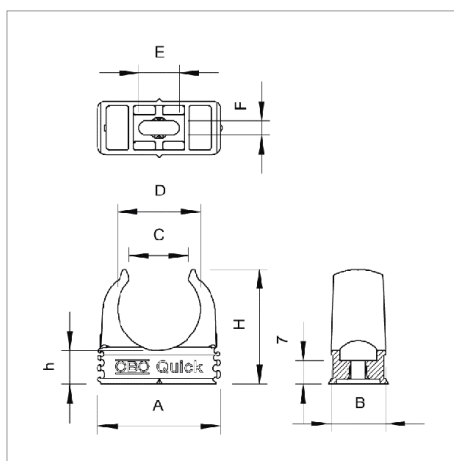

Legenda



gwint metryczny



Kennzeichnung metrischer Produkte



bezhalogenowy: bez chloru, fluoru i bromu



niepodtrzymujący palenia: 750°C



Oświadczenie o zgodności z dyrektywami WE