



RH

heatsinks for relays RSR52, RSR62




RDR-10


RH21



RH19A



RH19B



Applications	for RSR52	for RSR52	for RSR52
Material	aluminum	aluminum	aluminum
Color	black	black	black
Dimensions (L x W x H)	80 x 50 x 50 mm	70 x 50 x 69 mm	81 x 50 x 83 mm
Weight (typical)	115 g	275 g	335 g
Thermal resistance	2,1 °C/W	1,9 °C/W	1,9 °C/W
Additional equipment	–	RDR-10 ❶	–
Mounting	on panel, on 35 mm rail mount	on 35 mm rail mount (with clip RDR-10)	on 35 mm rail mount

RH17A



RH17B



RH06B



Applications	for RSR52	for RSR52	for RSR52
Material	aluminum	aluminum	aluminum
Color	grey	black	black
Dimensions (L x W x H)	90 x 50 x 69 mm	100 x 49 x 81 mm	123 x 76 x 67 mm
Weight (typical)	350 g	255 g	300 g
Thermal resistance	1,7 °C/W	1,7 °C/W	1,5 °C/W
Additional equipment	RDR-30 ❷	–	–
Mounting	on 35 mm rail mount (with clip RDR-30)	on panel	on panel


RH16



RH16-F



RH11




Applications	for RSR52	for RSR52	for RSR52, RSR62
Material	aluminum	aluminum	aluminum
Color	black	black	black
Dimensions (L x W x H)	106 x 50 x 96 mm	106 x 80 x 96 mm	142 x 150 x 55 mm
Weight (typical)	375 g	645 g	539 g
Thermal resistance	1,6 °C/W	0,6 °C/W	1,1 °C/W
Additional equipment	–	built-in fan	–
Mounting	on panel, on 35 mm rail mount	on panel, on 35 mm rail mount	on panel

❶ Clip RDR-10 for heatsink RH19A: for mounting on 35 mm rail mount (including 6 holes on M4 screws).

❷ Clip RDR-30 for heatsink RH17A: for mounting on 35 mm rail mount (including 6 holes on M3 screws).

RH09




Applications	for RSR52, RSR62
Material	aluminum
Color	black
Dimensions (L x W x H)	100 x 110 x 81 mm
Weight (typical)	560 g
Thermal resistance	0,9 °C/W
Additional equipment	–
Mounting	on panel

RH04A-F



Applications	for RSR52, RSR62
Material	aluminum
Color	black
Dimensions (L x W x H)	100 x 140 x 81 mm
Weight (typical)	830 g
Thermal resistance	0,4 °C/W
Additional equipment	built-in fan
Mounting	on panel

RH08




Applications	for RSR52, RSR62
Material	aluminum
Color	black
Dimensions (L x W x H)	106 x 110 x 96 mm
Weight (typical)	825 g
Thermal resistance	0,8 °C/W
Additional equipment	–
Mounting	on panel, on 35 mm rail mount

RH08-F



Applications	for RSR52, RSR62
Material	aluminum
Color	black
Dimensions (L x W x H)	106 x 140 x 96 mm
Weight (typical)	1 095 g
Thermal resistance	0,35 °C/W
Additional equipment	built-in fan
Mounting	on panel, on 35 mm rail mount

RH04B




Applications	for RSR52, RSR62
Material	aluminum
Color	black
Dimensions (L x W x H)	125 x 150 x 135 mm
Weight (typical)	2 320 g
Thermal resistance	0,4 °C/W
Additional equipment	–
Mounting	on panel

RH04B-F




Applications	for RSR52, RSR62
Material	aluminum
Color	black
Dimensions (L x W x H)	125 x 193 x 135 mm
Weight (typical)	2 590 g
Thermal resistance	0,15 °C/W
Additional equipment	built-in fan
Mounting	on panel


Dimensions

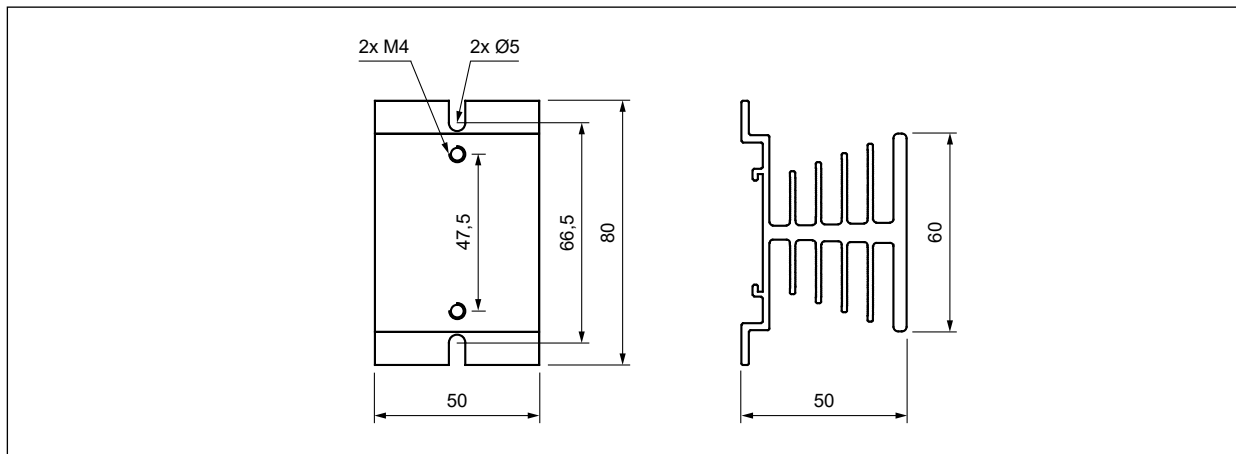

Heatsink RH21

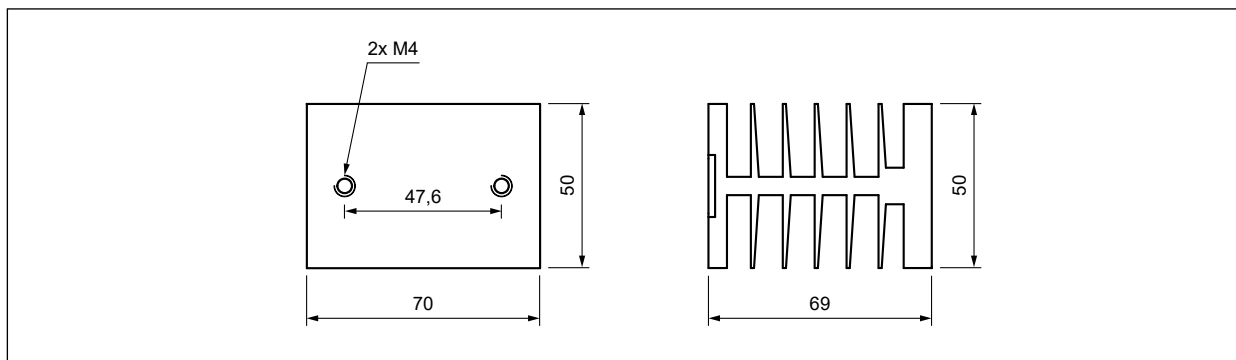


Heatsink RH19A

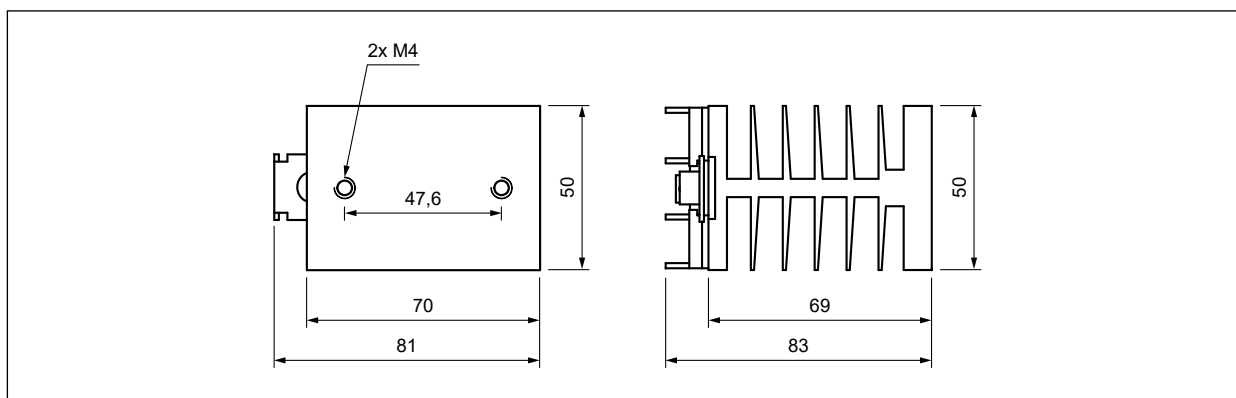


Heatsink RH19B


Dimensions

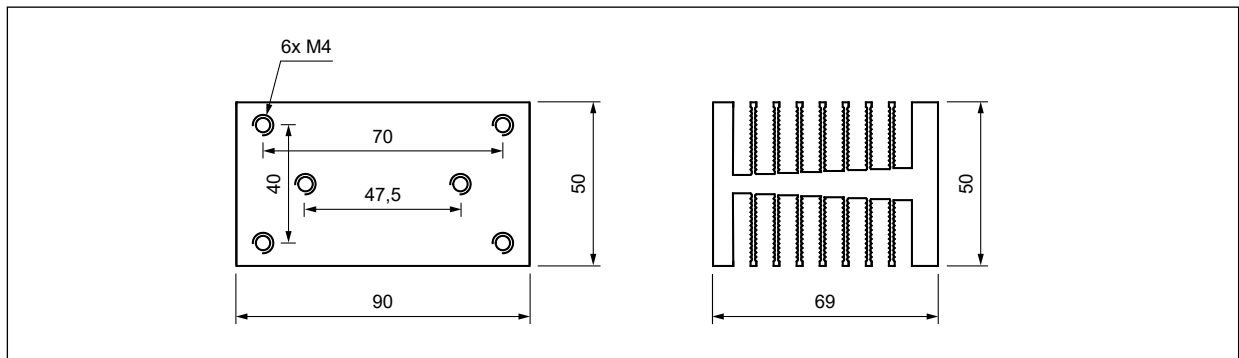

Heatsink RH17A

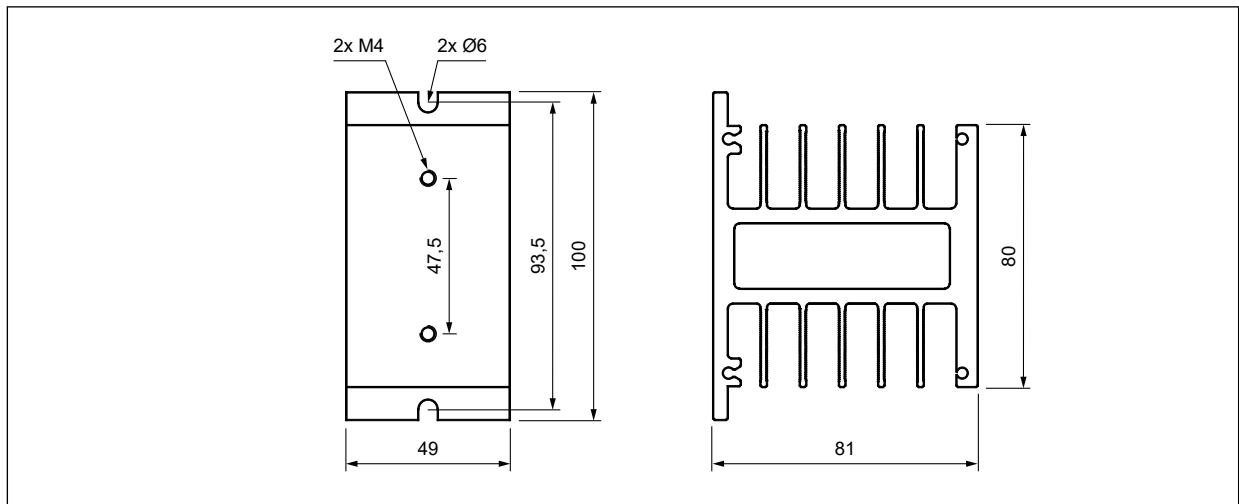


Heatsink RH17B

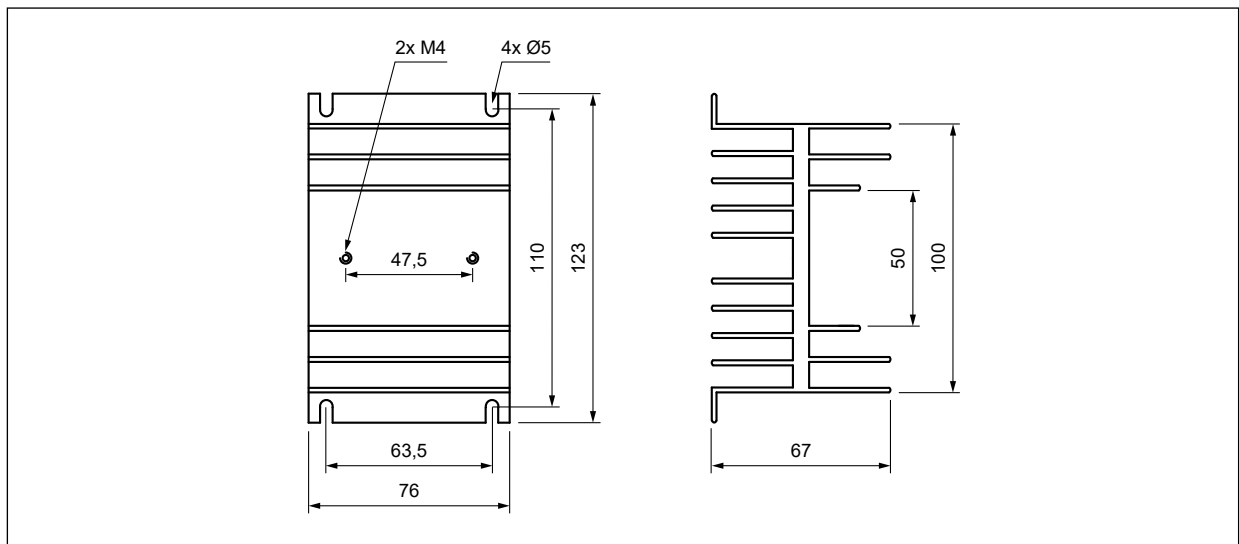


Heatsink RH06B


Dimensions

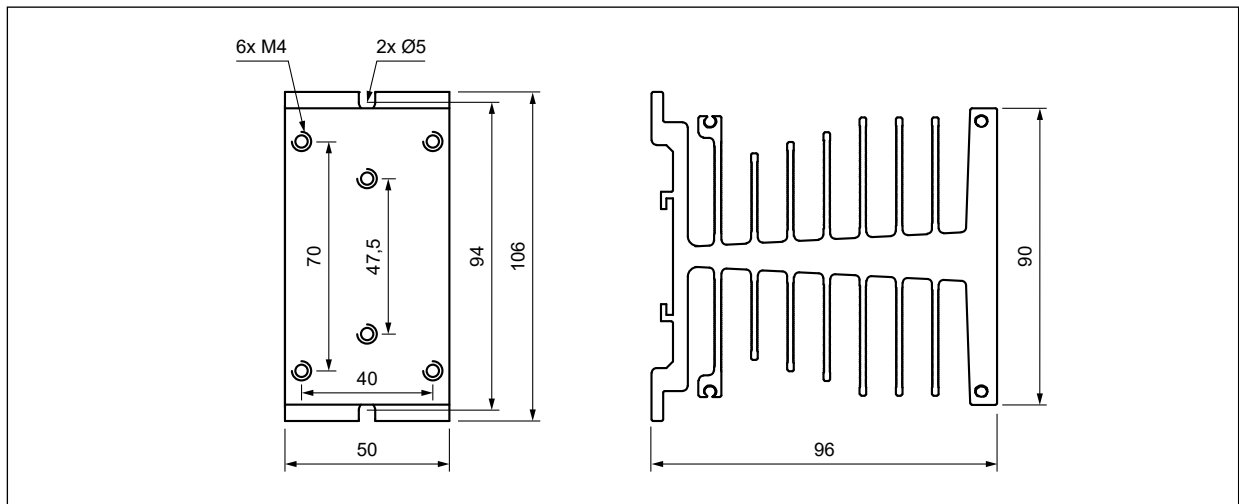

Heatsink **RH16**

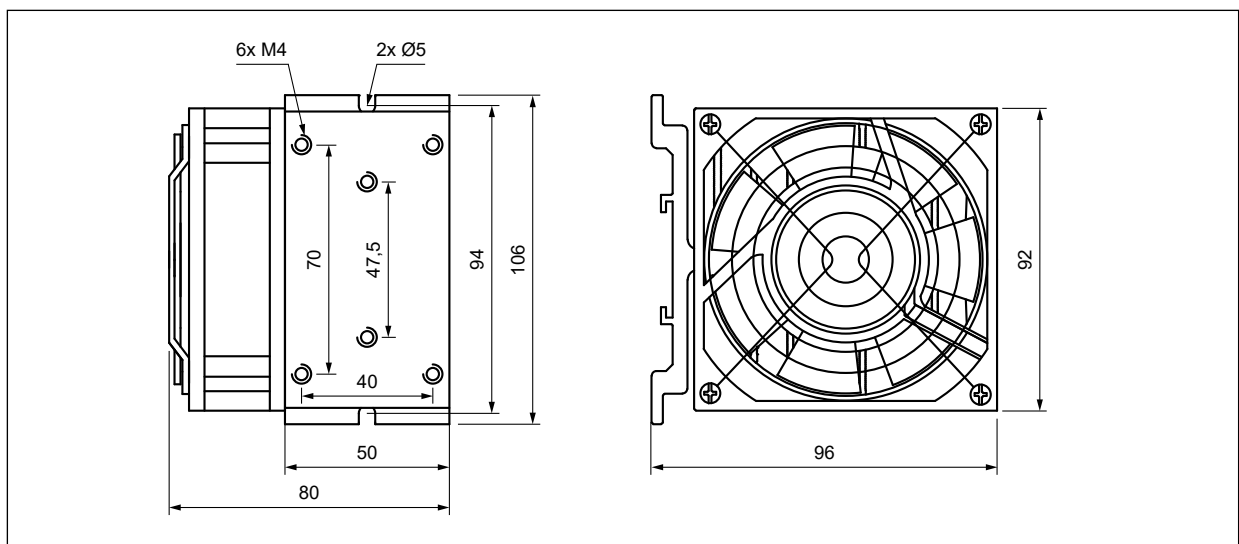


Heatsink **RH16-F**

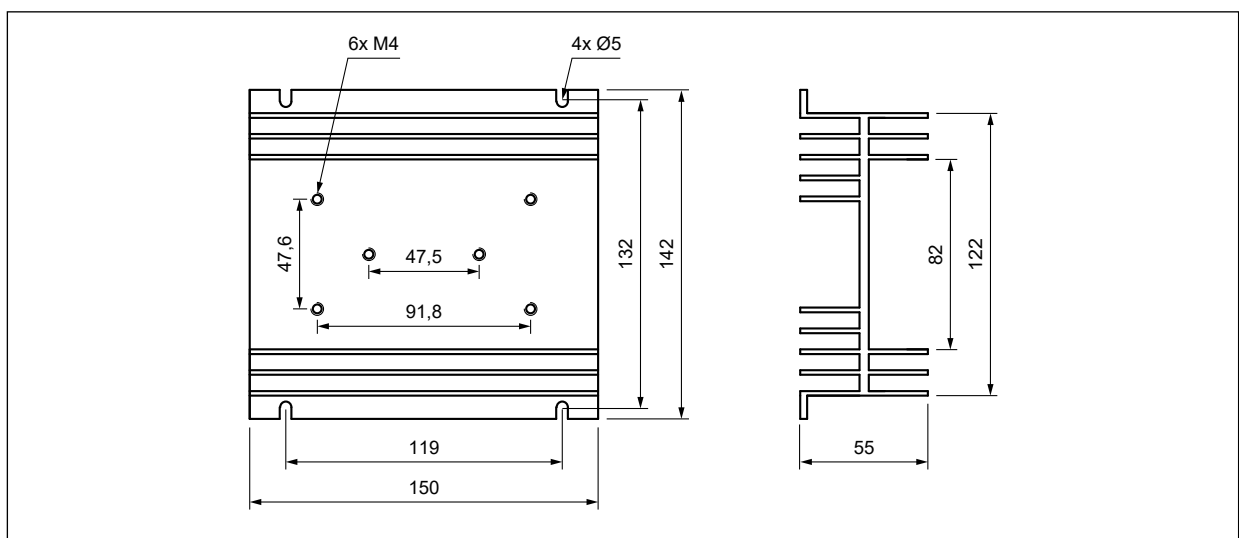


Heatsink **RH11**


Dimensions

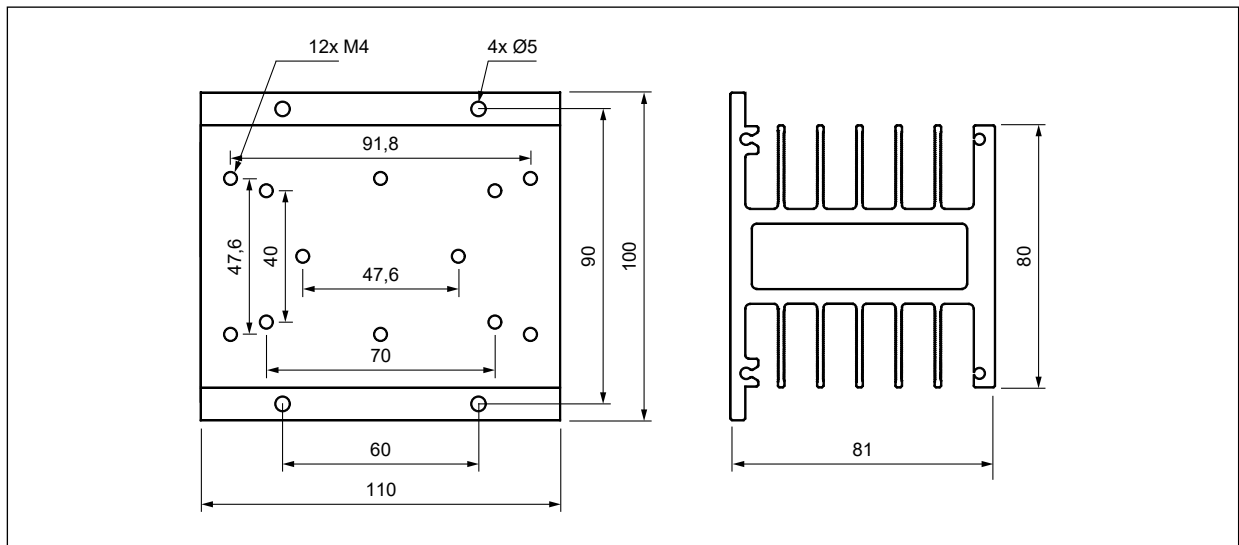

Heatsink RH09

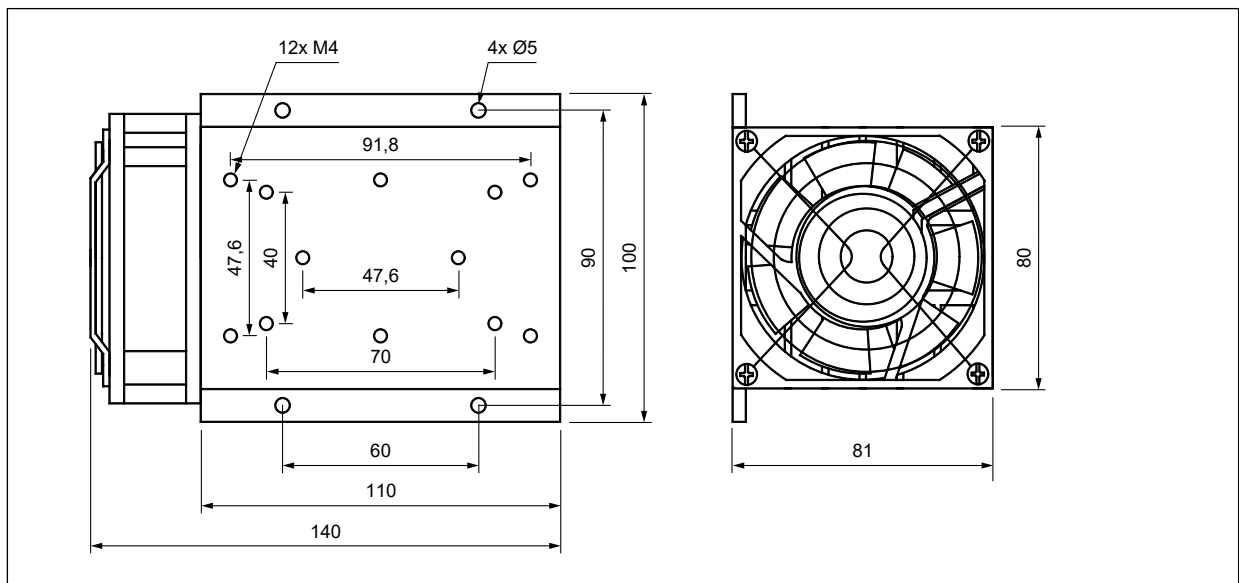


Heatsink RH04A-F

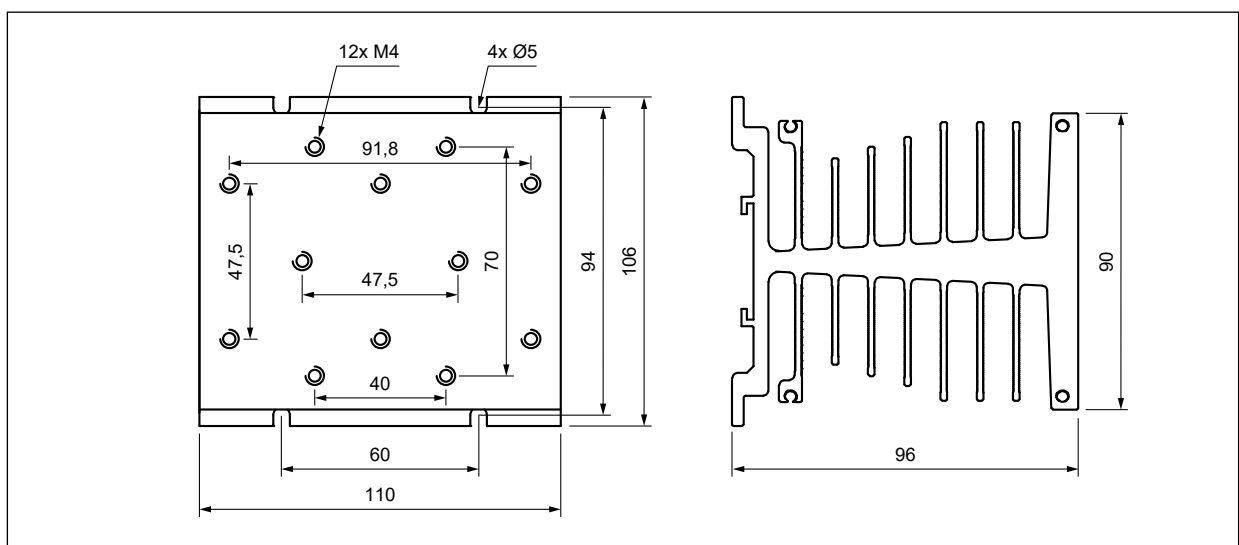


Heatsink RH08


Dimensions

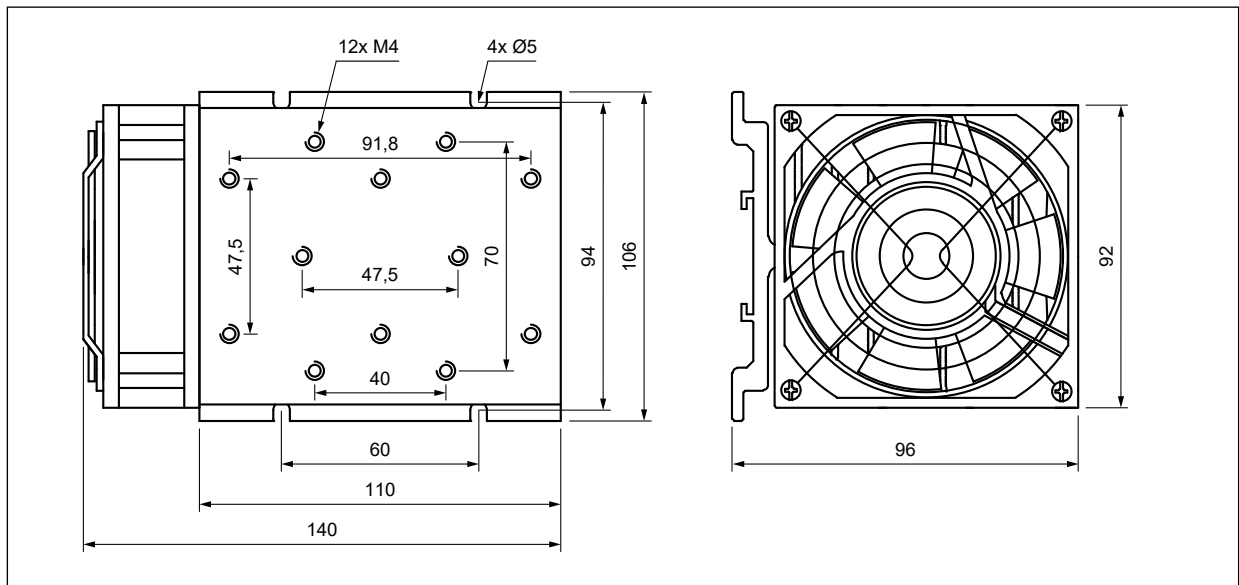

Heatsink RH08-F

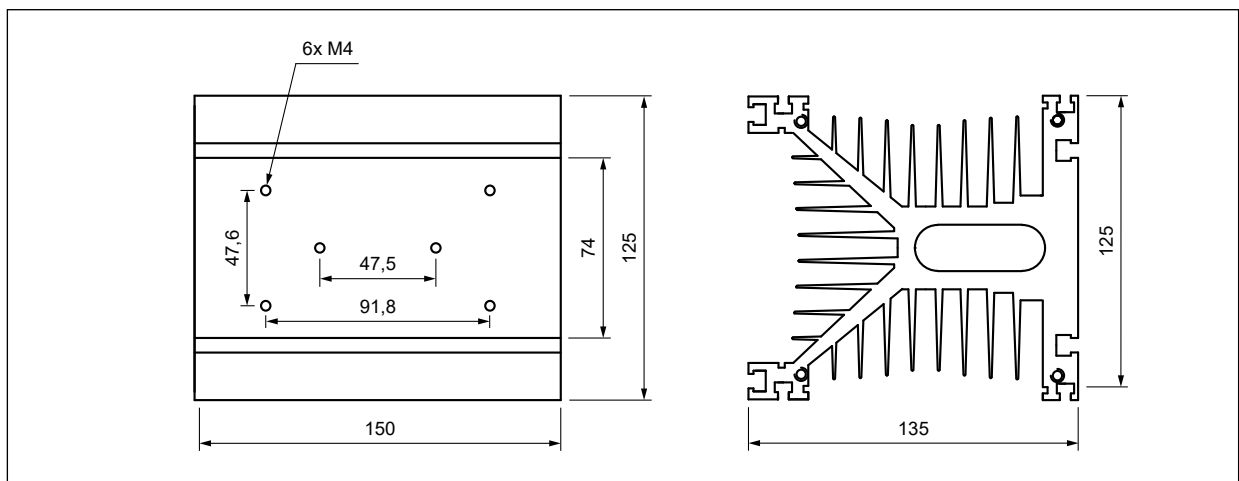

Heatsink RH04B

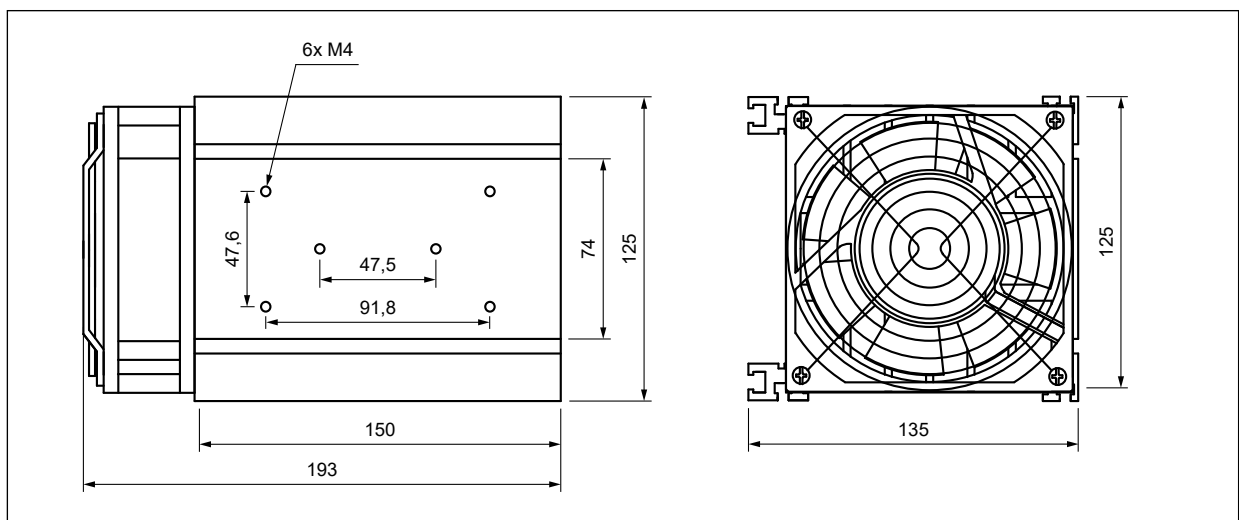

Heatsink RH04B-F