


OŚWIETLENIE ULICZNE - STAL

SŁUPY OŚWIETLENIOWE ULICZNE PROSTE STOŻKOWE OKRĄGŁE

NOWA TECHNOLOGIA
SŁUPY ULICZNE PROSTE OKRĄGŁE

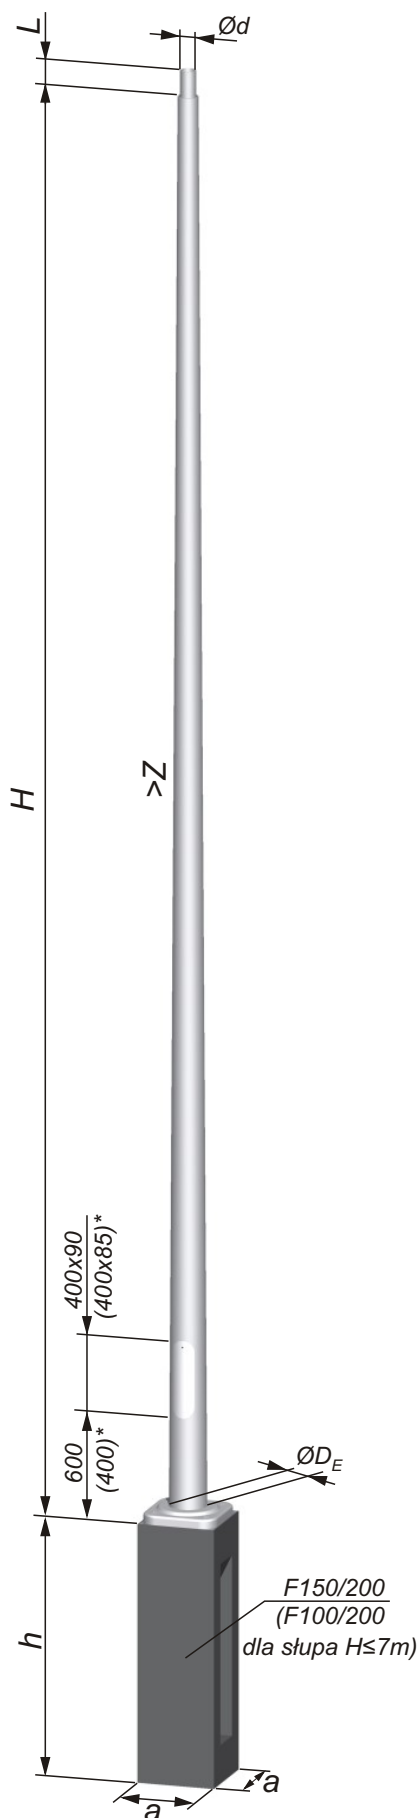

* - wymiary dotyczą słupa H≤7m

Dane techniczne

TYP	H	Ød/D _E	Z	L	m	S	a x a x h TYP
	m	mm	mm/m	mm	kg	m ²	m
S-60PC-3	6,0	48; 60/129	11,5	100	47	3,82	0,3 x 0,3 x 1,0 F100/200
S-70PC-3	7,0	48; 60/140,5			56	4,64	
S-80PC-3	8,0	48; 60/152			67	5,53	0,3 x 0,3 x 1,5 F150/200
S-90PC-3	9,0	48; 60/163,5			78	6,5	
S-100PC-3	10,0	48; 60/175			90	7,54	
S-110PC-3	11,0	48; 60/186,5			103	8,65	
S-120PC-3	12,0	48; 60/198			117	9,83	

Dane wytrzymałościowe

TYP	Masa opraw	Strefa wiatrowa wg PN EN 1991-1-4				M _F
		Dopuszczalna powierzchnia opraw [m ²]				
		I	I	II	III	
	kg	≤300m n.p.m	≤500m n.p.m.	≤300m n.p.m.	≤950m n.p.m.	kNm
S-60PC-3	50	0,798	0,570	0,512	0,340	5,7
S-70PC-3	50	0,768	0,539	0,482	0,313	7,2
S-80PC-3	50	0,685	0,470	0,417	0,262	8,5
S-90PC-3	50	0,657	0,443	0,390	0,240	10,3
S-100PC-3	50	0,626	0,415	0,364	0,219	12,0
S-110PC-3	50	0,596	0,389	0,339	0,200	14,0
S-120PC-3	50	0,567	0,364	0,316	0,182	16,0