




Niskonapięciowy profil U

Mounting section , length: 2000mm; for connecting sections, connectors and electrical feed; low voltage track (48 V) accommodates SUPERSYSTEM II spots, light inserts and AC/DC drivers with low voltage adapter (48V); low voltage adapter flush-fitted in track profile; tool-free mounting of spots, light inserts and driver; spots and light inserts (dimmable DALI only) can be addressed/controlled individually via the Powerline signal in the low voltage track; mounting section of extruded aluminium section white, powder coated; track aperture can be optionally closed with cover profile; electrical feed or cover plates at face end must be ordered separately; mounting to: ceiling or wall or suspended; dimensions: 2000x26x30 mm; weight: 1.18 kg;

Note: designed to be cut to required length by customer; please order pendant mounting set separately.



ZS_SU2_F_Schiene_NV_U-Profil_whm.jpg

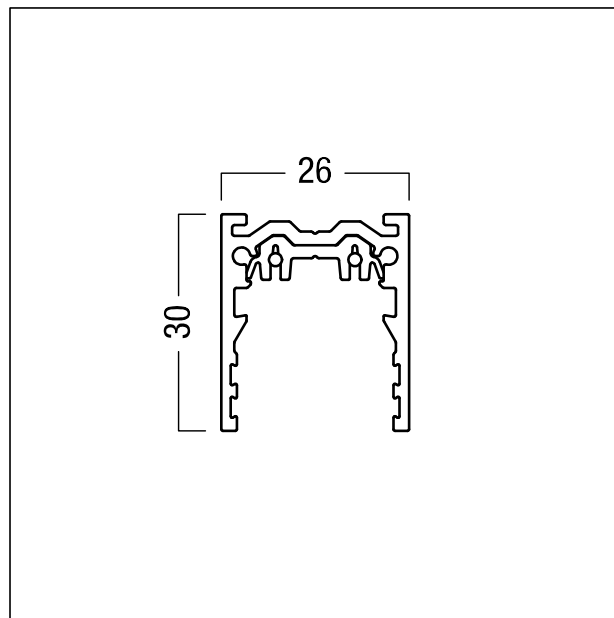

ZS_SU2_M_U_PROF.wmf

Dystrybucja światła

STD - Standard