


Czujnik ruchu/ światła otoczenia

DALI-2 Multi Sensor for motion detection and ambient light detection for connection to DALI-2 controllers. Optimised for industrial and logistics applications. Motion detection (DALI Part 303) is via PIR technology. Standard light measurement (DALI Part 304) between 5 and 2000lx possible. Compatible with all DALI-2 application controllers that support DALI Part 303 and 304, such as LITECOM DALI-2 and DIMLITE pro. Also for use and combination with bmLINK TEC-GP modules. One sensor requires 5 DALI loads (9mA). For sensor heights up to 16m. Detection radius for motion 14 m at mounting height of 9 m. Detection radius for light 14 m at mounting height of approx. 1.5 m. Sensor lens made of polyethylene (PE), sensor housing made of polycarbonate (PS). TECTON GP adapter made of sheet steel, pre-painted in polyester lacquer finish in black. Sensor is always white, even with silver or black housing. Shield to reduce the PIR detection range is optionally available, has no effect on the light measurement. Temperature range from -20°C to +45°C. Protection rating: IP20. Dimensions: 248x90x54 mm; weight approx. 0.55kg



ZS_TEC_F_MSENS_HC_WH.jpg

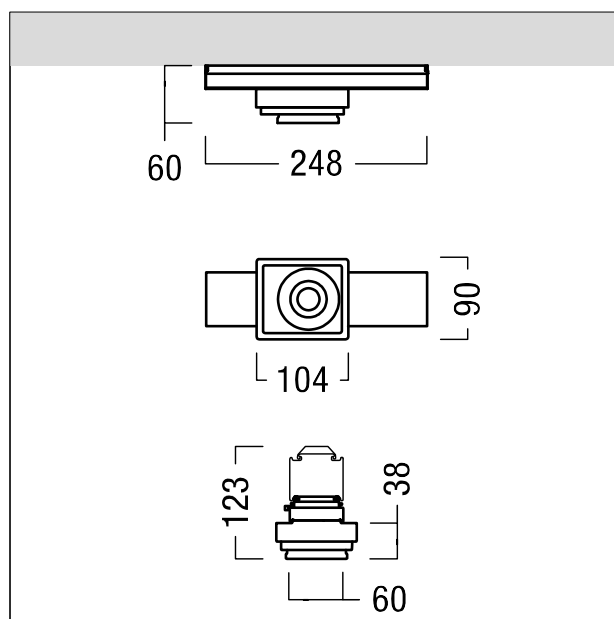

ZS_TEC_M_MSENS_TEC-GP_HC.wmf