

ONLITE central eBox OCM-ECC

Moduł obwodu prądu

Nr art. 22185295

Zastosowanie

The ONLITE central eBox OCM-NPS is an output circuit module for supplying power to 20 emergency and escape sign luminaires per circuit for 230V AC / 216V DC for the purpose of circuit monitoring.

All connected luminaires which are AC/DC compatible can be switched as a complete circuit, and can be calibrated for circuit monitoring either manually by service PIN or via the display of the ONLITE central ebox.

Wskazówki dotyczące planowania

Up to three output circuit modules can be fitted in each ONLITE central eBox MS 1200/1700, or in the ONLITE central eBox SUBxx distribution stations by plugging them into the multipole male edge connector whilst the power is off, and then screwing them in place.

The output circuit modules are each fitted with fuses rated 3.15 AT, which can be loaded to 60% of this level according to the standard. Therefore the power available for each output circuit is 420 VA and 200 W for DC operation.

5-pole wiring is used for the luminaires in the final circuits (L/N/PE/DA/DA).



Opis działania


Status LED

green, flickering occasionally operating correctly
green, switching on/off regularly every 2 seconds system has frozen
orange. emergency operation
orange, switching on/off regularly every 0.5 seconds . . Test mode (functional test or service life test) or calibration of output circuits
red failure of CPU or EEPROM
red, flickering Fault in output circuit
red, switching on/off regularly every 4 seconds system bus failure
green-red: 4 secs green, flickering occasionally – 0.5 secs red lamp fault


Schemat połączeń

zum Hauptverteiler
to main distribution unit
vers le répartiteur principal
al ripartitore principale
al distribuidor principal
naar hoofdverdeler

Systembus
system bus
bus système
bus di sistema
bus de sistema
systeembus

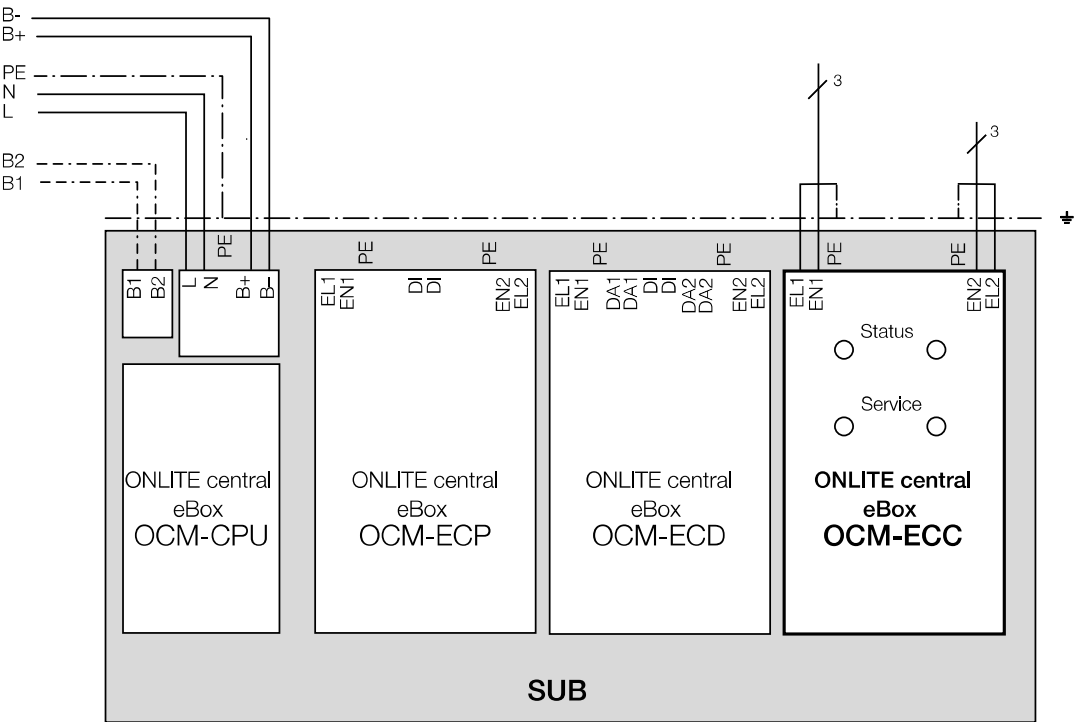

Rozmiar



Dane techniczne

{failed}	
{failed}	
Okablowanie do sterowania DALI	
{failed}	
Wymiary	
Materiał obudowy	poliwęglan
Instalacja	
{failed}	
Kolor skrzynki	
{failed}	IP20
Klasa ochronności	
Dopuszczalna temperatura Ta: 0 - 50°C otoczenia Ta	
{failed}	
Weight	Ok. 0.4 kg
{failed}	

Tabliczka znamionowa/podłączenia



ONLITE central eBox OCM-ECC
Ausgangskreis (stromkreisüberwacht)
Output circuit (circuit monitored)

Art.-Nr. 22 185 295

12 V DC
Ta: 0 – 50 °C

