




Oprawa do wbudowania Mellow Light

LED recessed ceiling luminaire with digitally dimmable, DC voltage-compliant LED converter for DALI control with two DALI addresses for separate control of central and side area; Luminaire input power: 46.2 W. LED service life lasts 100000 h before luminous flux is reduced to 80% of the initial value. Chromaticity tolerance (initial MacAdam): 3. Luminaire luminous flux: 4740 lm, Luminaire efficacy: 103 lm/W. Colour rendering Ra > 80, colour temperature 4000 K. Despite maximum quality control, recognisable colour differences between luminaires with the predefined binning may occur with cluster applications. To achieve a uniform appearance, we recommend consulting a lighting consultant with intended cluster or continuous row installations. Diffuse side areas for pleasant ambient lighting and high quality lens optic (Advanced Crystal Optic) for central area for glare-free lighting with UGR < 19 and L65 < 3000 cd/m² and rich-contrast appearance, internal 5-pole plug-in terminal block (can be connected from inside or outside); can be installed as a single luminaire or in a cluster; designed to fit in ceiling apertures cut with a saw and in modular ceilings with concealed or visible joist system; fixing set and strain relief must be ordered separately; Luminaire with external electrical connection. Luminaire wired with halogen-free leads; Dimensions: 598 x 598 x 77 mm, weight: 6.2 kg



ZS_ML6_F_Einbau_CO_Q.jpg

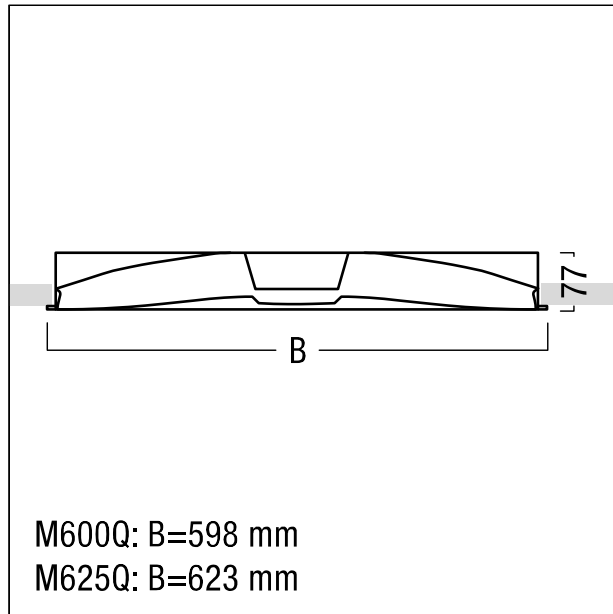

ZS_ML6_M_EB_Q.wmf

Dystrybucja światła

STD - Standard

Ten produkt zawiera źródła światła o klasie energetycznej D.

Wartości oznaczone gwiazdką (*) są wartościami znamionowymi. Inicjalna tolerancja mocy oraz strumienia świetlnego wynosi +/-10%. Jeżeli nie podano inaczej, wartości te obowiązują dla temperatury 25°C