




## Oprawa bezpieczeństwa

LED emergency luminaire for escape route lighting with min. 1 lux compliant to EN 1838; Room height 2.2 to 10 m; high performance (HP) version enables wider luminaire spacing and applications with higher illuminances (e.g. 5 lux, 1 footcandle); 2 high power LEDs, neutral white 4,000 K; lens of polycarbonate; optimum thermal management via heat sink; Ceiling surface-mounted luminaire; Screw mounting of the gear tray, tool-free quick mounting of the cover; Cover ring made of diecast aluminium, powder-coated; housing colour white (close to RAL9016); Galvanized sheet steel gear tray; Luminaire with local battery supply for 3 h emergency lighting in maintained or non-maintained mode, with automatic test (auto-test) via the luminaire, optional central monitoring via DALI, display of luminaire status via status LED; NFC interface for addressing, configuration and maintenance via PROset Pen (article no.: 22170290) or PROset app; addressing also alternatively possible visually or via EZ-addressing; Maintained and non-maintained mode: +5°C to +30°C; power supply: 220-240 V AC (+/- 10%), 50-60 Hz; Luminaire input power: 8.2 W (with battery fast-charge in maintained mode); typical power (without battery charge): 6 W in maintained mode / 1,1 W in non-maintained mode; Non-maintained and maintained mode settable via jumper and NFC interface; IP40; SC1; Luminaire wired with halogen-free and silicone-free leads; Plug-in terminals for through-wiring up to 2.5 mm<sup>2</sup>; Impact strength: IK05; Dimensions: 146 x 146 x 48 mm; weight: 0.97 kg; Luminaire with D symbol (for use in environments in which no unusual accumulation of dust is expected); Robust, integrated battery with 3-year warranty. Valid according to terms of the manufacturer's warranty, available at [https://www.zumtobel.com/media/downloads/Garantiebedingungen\\_DE.pdf](https://www.zumtobel.com/media/downloads/Garantiebedingungen_DE.pdf); Battery warranty invalid if installation takes place three (3) months after delivery EXW (Incoterms 2010)




ZS\_RES\_F\_PRO\_MSC\_IP40\_ExD\_ESC\_HP\_WH.jpg

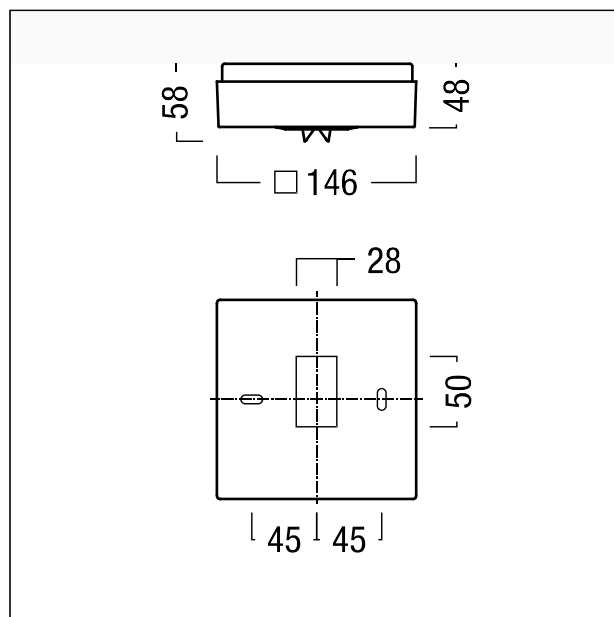

ZS\_RES\_M\_PRO\_MSC\_IP40\_HP.wmf

## Dystrybucja światła

## STD - Standard

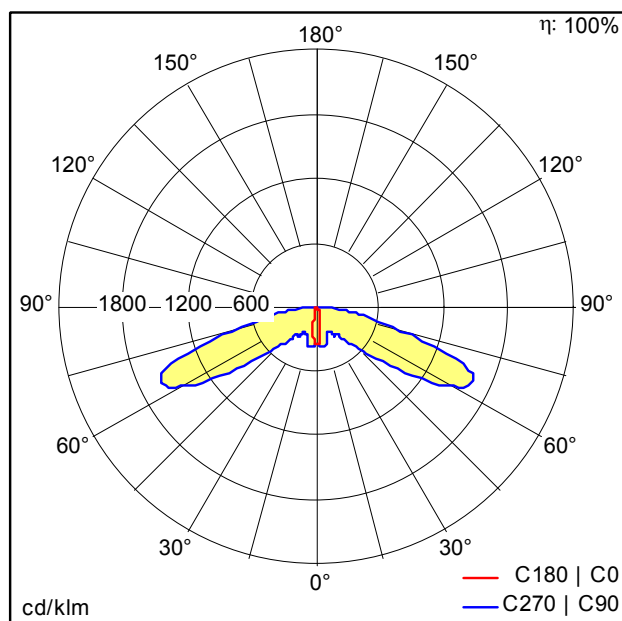

D43503\_RESC\_PRO\_MSC\_ESC\_HP\_E3D\_WH.Idt

Patrz dodatkowe informacje na następnej stronie.

- Źródło światła: LED
- Strumień świetlny oprawy\*: 487 lm
- Całkowity strumień "awaryjny": 487 lm
- Skuteczność oprawy\*: 59 lm/W
- Współczynnik oddawania barw: 70
- Statecznik: 1 x 89800524 DRV EM TR LBS P ST DA 5W 2
- Tolerancja miejscowa barwy (initial Mac Adam): 5
- Średnia żywotność nominalna\*: L95 100000h przy 25°C
- Moc oprawy\*: 8,2 W Współczynnik mocy = 0,84
- Moc w trybie czuwania\*: 1,2 W
- Wydajność ładowania: 2,27 W
- Znamionowa trwałość użytkowa: 3 h
- Kategoria konserwacji CIE 97: D - Zamknięta IP2X



RESCLITE PRO MSC do montażu napowierzchniowego na suficie IP40



**ZUMTOBEL**

RESCLITE PRO MSC ESC HP E3D WH

42185732

Oprawa bezpieczeństwa