


Oprawa rynienkowa do pom. wilgotnych

LED Moisture-proof diffuser luminaire with IP66 protection rating and drip-edge effect for minimizing dirt and collection of dust for maximum hygienic requirements. Luminaire input power: 43.7 W, Slave luminaire for DALI control (DALI only) with LED converter; patented InvisiClick for clipless mounting and opening of the cover. Cover and basic diffuser made of impact-resistant CHEMO, temperature- and UV-resistant, made as a single injection-molded piece. LED service life lasts 100000 h before luminous flux is reduced to 95% of the initial value. Chromaticity tolerance (initial MacAdam): 3. Luminaire luminous flux: 6590 lm, Luminaire efficacy: 151 lm/W. Colour rendering Ra > 80, colour temperature 4000 K. Luminaire with symmetric distribution (medium beam). Mounting via V2A standard spring clips to ceilings, walls or trunking. 5-pole connector terminal. Suitable for through-wiring with H05VV or NYM cable (10A). ambient temperature: -25°C to +30°C. Approved for indoor use with vertical or horizontal wall mounting (see installation instructions). Note: please contact your consultant if you are planning to use the luminaire in environments with chemical pollutants, high or condensing humidity and major variations in temperature. Complies with International Food Standard specifications. Designed for BESA box. Permissible for use in environments where the deposition of conductive dust on the luminaire can be expected (EN 60598-2-24). Protection class: SC1, 850°C glow-wire tested, resistant against ammonia and cleaning agents in FOOD industry. Luminaire wired with halogen-free leads and contains no silicone, Impact strength: IK07, Dimensions: 1600 x 92 x 90 mm; weight: 2.1 kg.




ZS_AMP_F_AMPHIBIA_NB.jpg

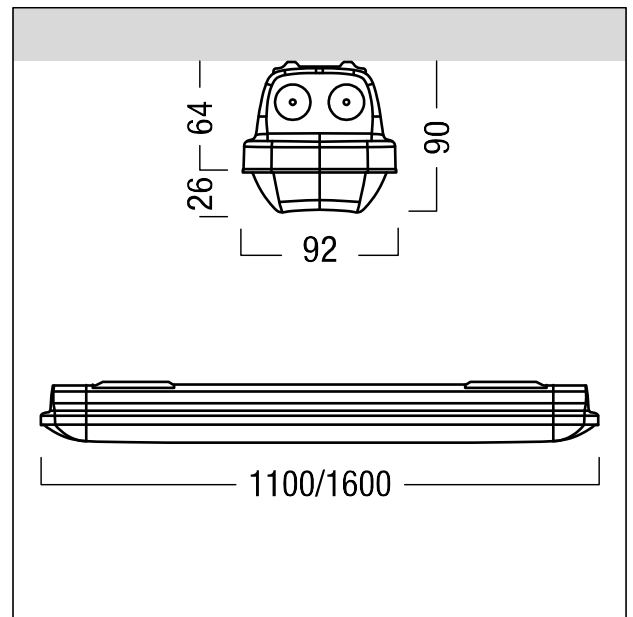

ZS_AMP_M_Amphibia.wmf

Dystrybucja światła

STD - Standard

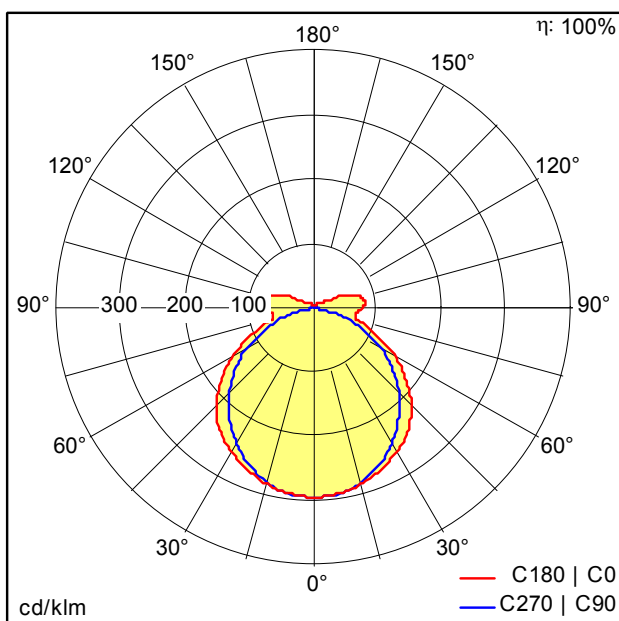

D42468AA_AMP_L_6400-840_CH_MB_LDO.idt

- Źródło światła: LED
- Strumień świetlny oprawy*: 6590 lm
- Skuteczność oprawy*: 151 lm/W
- Współczynnik oddawania barw: 80
- Statecznik: 1 x 28000655 LCA 50W 100-400mA one4all Ip PRE
- Temperatura barwowa*: 4000 Kelvin
- Tolerancja miejscowa barwy (initial Mac Adam): 3
- Średnia żywotność nominalna*: L95 100000h przy 30°C
- Moc oprawy*: 43,7 W Współczynnik mocy = 0,97
- Moc w trybie czuwania*: 0,2 W
- sterowanie: LDO ściemniany do 1% poprzez DALI
- : E - Zamknięty IP5X
- Total harmonic distortion (THD): 8,00 %

Ten produkt zawiera źródło światła o klasie efektywności energetycznej C.
Patrz dodatkowe informacje na następnej stronie.



Oprawa rynienkowa do pom. wilgotnych