


Oprawa rynienkowa do pom. wilgotnych

LED Moisture-proof diffuser luminaire with IP66 protection rating and drip-edge effect for minimising dirt and collection of dust for maximum hygienic requirements. Luminaire input power: 50 W, electronic ballast with LED converter; patented InvisiClick for clipless mounting and opening of the cover. Cover and basic diffuser made of impact-resistant polymethylmethacrylate, temperature- and UV-resistant, made as a single injection-moulded piece. LED service life lasts 100000 h before luminous flux is reduced to 90% of the initial value. Chromaticity tolerance (initial MacAdam): 3. Luminaire luminous flux: 7920 lm, Luminaire efficacy: 158 lm/W. Colour rendering Ra > 80, colour temperature 4000 K. Luminaire with symmetric wide light distribution (wide beam). Mounting via V2A standard spring clips to ceilings, walls or trunking. 5-pole connector terminal.. ambient temperature: -10°C to +32°C. Approved for indoor use with vertical or horizontal wall mounting (see installation instructions). Note: please contact your consultant if you are planning to use the luminaire in environments with chemical pollutants, high or condensing humidity and major variations in temperature. Complies with International Food Standard specifications. Designed for BESA box. Permissible for use in environments where the deposition of conductive dust on the luminaire can be expected (EN 60598-2-24). Protection class: SC1, 650°C glow-wire tested, resistant against ammonia and cleaning agents in FOOD industry. Luminaire wired with halogen-free leads and contains no silicone, Impact strength: IK03, Dimensions: 1600 x 92 x 90 mm; weight: 3 kg.




ZS_AMP_F_AMPHIBIA_WB.jpg

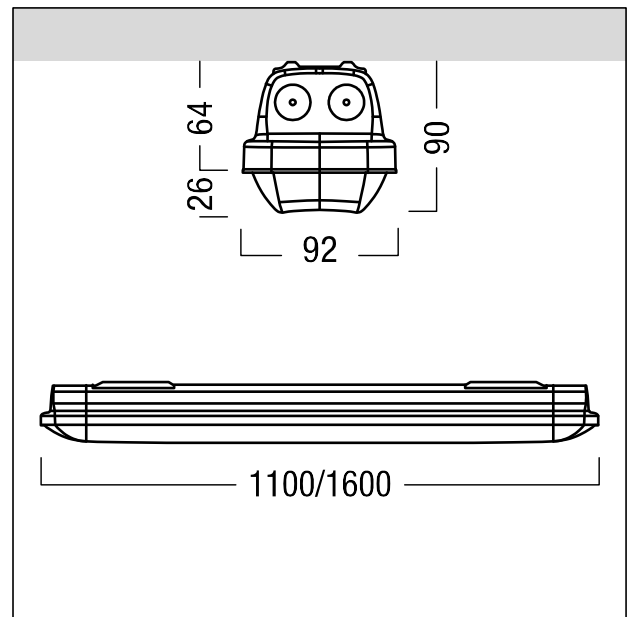

ZS_AMP_M_Amphibia.wmf

Dystrybucja światła

STD - Standard

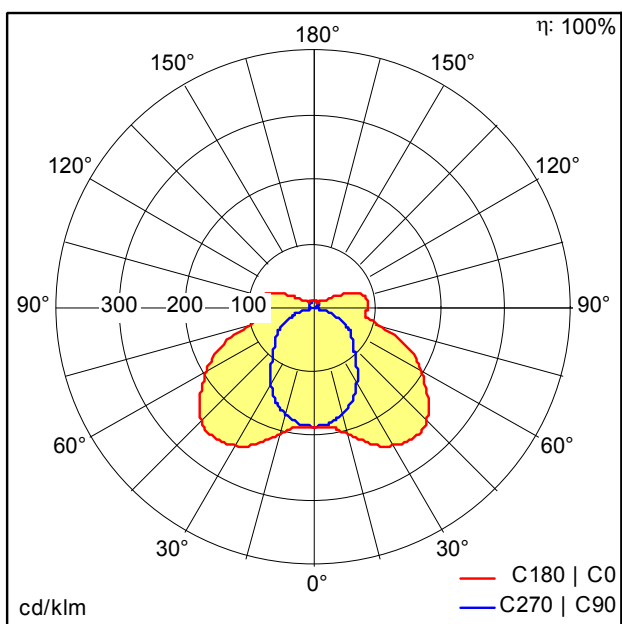

D45902_AMP_L_8000-840_PM_WB_EVG.Idt

- Źródło światła: LED
- Strumień świetlny oprawy*: 7920 lm
- Skuteczność oprawy*: 158 lm/W
- Współczynnik oddawania barw: 80
- Statecznik: 1 x 28000690 LC 100W 250-700mA flexC Ip EXC
- Temperatura barwowa*: 4000 Kelvin
- Tolerancja miejscowa barwy (initial Mac Adam): 3
- Średnia żywotność nominalna*:
L90 100000h przy 32°C
L95 100000h przy 25°C
- Moc oprawy*: 50 W Współczynnik mocy = 0,96
- Moc w trybie czuwania*: 0,2 W
- sterowanie: EVG
- : E - Zamknięty IP5X
- Total harmonic distortion (THD): 14,00 %

Ten produkt zawiera źródło światła o klasie efektywności energetycznej C.

Patrz dodatkowe informacje na następnej stronie.





Oprawa rynienkowa do pom. wilgotnych