


Oprawa rynienkowa do pom. wilgotnych

LED Moisture-proof diffuser luminaire with IP66 protection rating and drip-edge effect for minimizing dirt and collection of dust for maximum hygienic requirements. Luminaire input power: 65.8 W, with dimmable constant current LED driver, especially suitable for industrial applications in adverse surroundings such as cold store halls and factories with increased ambient temperatures; patented InvisiClick for clipless mounting and opening of the cover. Cover and basic diffuser made of impact-resistant polycarbonate, temperature- and UV-resistant, made as a single injection-molded piece. LED service life lasts 100000 h before luminous flux is reduced to 90% of the initial value. Chromaticity tolerance (initial MacAdam): 3. Luminaire luminous flux: 9850 lm, Luminaire efficacy: 150 lm/W. Colour rendering Ra > 80, colour temperature 4000 K. Luminaire with symmetric distribution (medium beam). High quality direct/indirect lighting concept for optimum lighting solutions in parking garages and industrial applications. Mounting via V2A standard spring clips to ceilings, walls or trunking. 5-pole connector terminal. ambient temperature: -40°C to +34°C. Approved for indoor use with vertical or horizontal wall mounting (see installation instructions). Note: please contact your consultant if you are planning to use the luminaire in environments with chemical pollutants, high or condensing humidity and major variations in temperature. Complies with International Food Standard specifications. Designed for BESA box. Permissible for use in environments where the deposition of conductive dust on the luminaire can be expected (EN 60598-2-24). Protection class: SC1, 850°C glow-wire tested. Luminaire wired with halogen-free leads and contains no silicone, Impact strength: IK08, Dimensions: 1600 x 92 x 90 mm; weight: 3.4 kg.




ZS_AMP_F_AMPHIBIA_WB.jpg

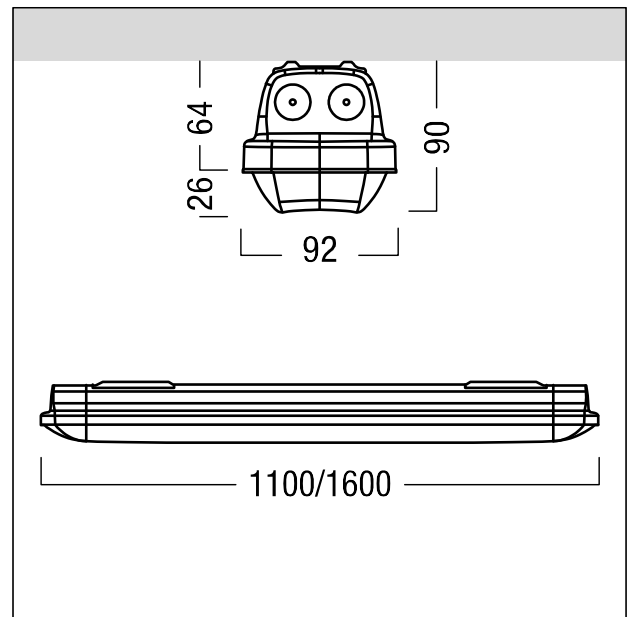

ZS_AMP_M_Amphibia.wmf

Dystrybucja światła

STD - Standard

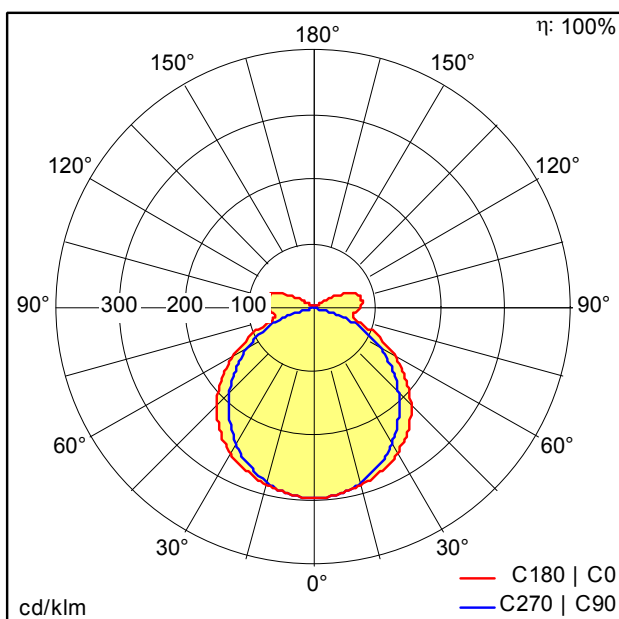

D45908_AMP_LT_L_10000-840_PC_MB_IVG.ltd

- Źródło światła: LED
- Strumień świetlny oprawy*: 9850 lm
- Skuteczność oprawy*: 150 lm/W
- Współczynnik oddawania barw: 80
- Statecznik: 1 x 28002052 LCI 100/200-850/300 o4a sl PRE
- Temperatura barwowa*: 4000 Kelvin
- Tolerancja miejscowa barwy (initial Mac Adam): 3
- Średnia żywotność nominalna*:
L90 100000h przy 34°C
L95 100000h przy 25°C
- Moc oprawy*: 65,8 W Współczynnik mocy = 0,96
- Moc w trybie czuwania*: 0,2 W
- : E - Zamknięty IP5X
- Total harmonic distortion (THD): 7,00 %

Ten produkt zawiera źródło światła o klasie efektywności energetycznej C.
Patrz dodatkowe informacje na następnej stronie.



Oprawa rynienkowa do pom. wilgotnych