




Oprawa bezpieczeństwa

LED emergency luminaire for escape route lighting with min. 1 lux compliant to EN 1838; Room height 2.2 to 7 m; 2 high power LEDs, neutral white 4,000 K; lens of polycarbonate; optimum thermal management via heat sink; TECTON module; Tool-free connection to TECTON continuous row system; roll-formed sheet steel with polyester paint finish; housing colour black (RAL9005); ; NFC interface for addressing, configuration and maintenance via PROset Pen (article no.: 22170290) or PROset app; addressing also alternatively possible visually or via EZ-addressing; Maintained and non-maintained mode: +5°C to +30°C; power supply: 220-240 V AC (+/- 10%), 50-60 Hz; ; Non-maintained and maintained mode settable via jumper and NFC interface; IP20; SC1; Luminaire wired with halogen-free and silicone-free leads; Impact strength: IK04; Dimensions: 500 x 60 x 85 mm; weight: 0.9 kg; Robust, integrated battery with 3-year warranty. Valid according to terms of the manufacturer's warranty, available at https://www.zumtobel.com/media/downloads/Garantiebedingungen_DE.pdf; Battery warranty invalid if installation takes place three (3) months after delivery EXW (Incoterms 2010)




ZS_RES_F_PRO_TEC-GP_ExD_ESC_BK.jpg

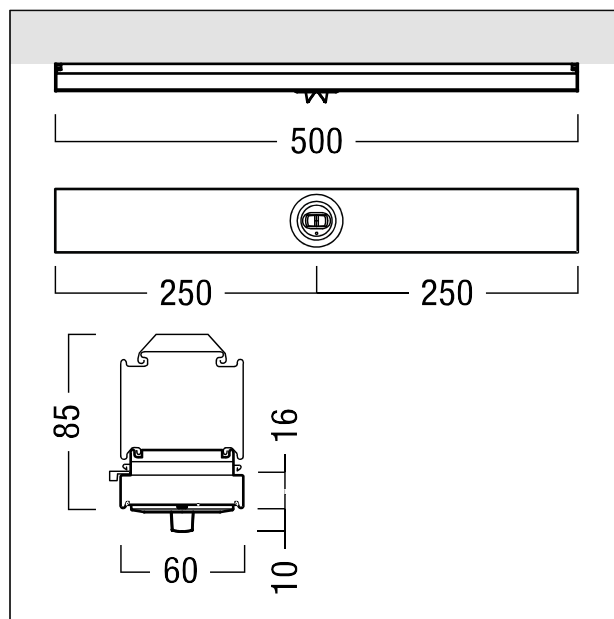

ZS_RES_M_PRO_TEC-GP_ExD.wmf

Dystrybucja światła

STD - Standard

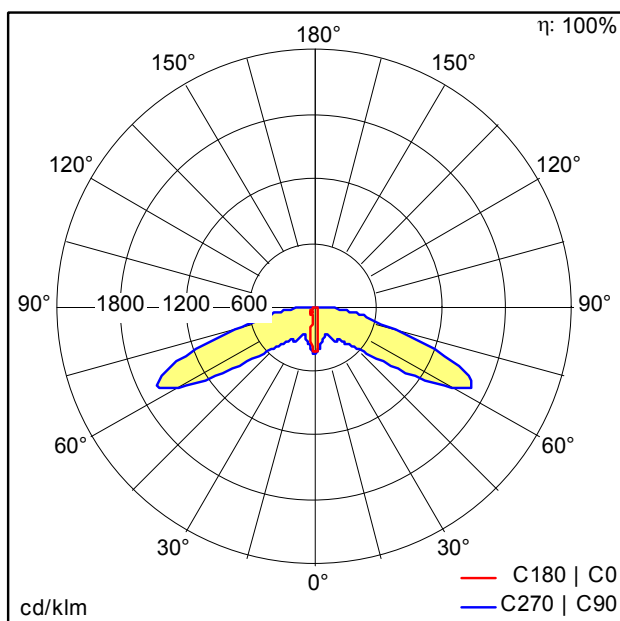

D39712AA_RESCLITE_PRO_TEC-GP_ESC_E1D_WH.Idt

Wartości oznaczone gwiazdką (*) są wartościami znamionowymi. Jeżeli nie podano inaczej, wartości te obowiązują dla temperatury 25°C

