


Oprawa LED do wbudowania w suficie

LED ceiling-recessed luminaire (pre-assembled luminaire); "stableWhite" LED luminaire, symmetric wide-beam light distribution with maximum luminaire efficiency and optimum photometric properties; lamp(s): LED1000-930; Colour rendering Ra > 90 (R9 > 50), colour temperature 3000 K (warm white); Chromaticity tolerance (initial MacAdam): 2; Luminaire input power: 9 W; Luminaire luminous flux: 1039 lm, Luminaire efficacy: 115 lm/W; service life: 100000h at 90% luminous flux or 50000h at 95% luminous flux; includes separate control unit Slave luminaire for DALI control (DALI only); high-quality reflector unit fixed to modular LED lighting chamber by twist-and-lock mechanism; high-efficiency LED lighting chamber is integrated in optimised, passive thermal management system of diecast aluminium; reflector: smooth, white painted finish; reflector/trim made of high-quality, UV-resistant polycarbonate; cover ring white; mounting ring of Glass fibre-reinforced polycarbonate (PC), grey; luminaire unit can be fitted quickly without tools using twist-and-lock mechanism; IP44_IP20; luminaire wired with halogen-free leads; power connection: 5-pole connector terminal; ; loop-in/loop-out possible; mains voltage: 220-240V / 0/50/60Hz, for use with 220V DC central battery ; installation: tool-free quick installation using antislip spring clips in ceilings of thickness 1-40mm; ceiling cutout: 150mm, recess depth: 113mm; weight: 0.84 kg; Note: UGR<19 (aluminized reflector type) for office applications in compliance with EN12464




ZS_PA_E_F_E150_HL_Rahmen_WW.jpg

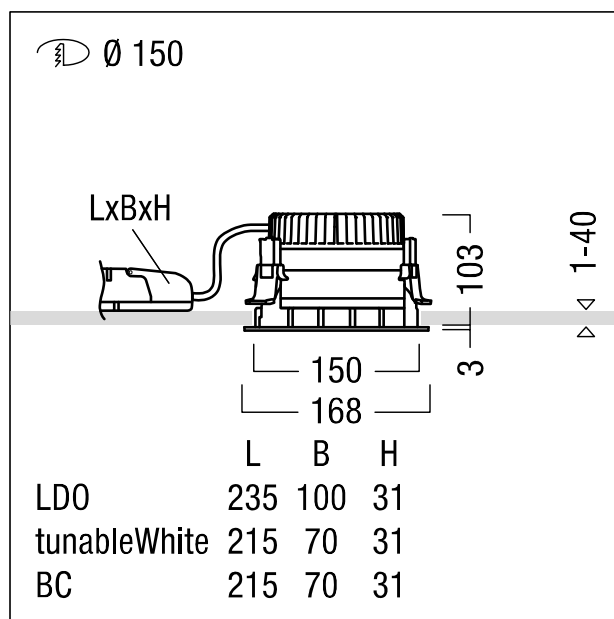

ZS_PA_I_M_R150H_LED_WH.wmf

Dystrybucja światła

STD - Standard

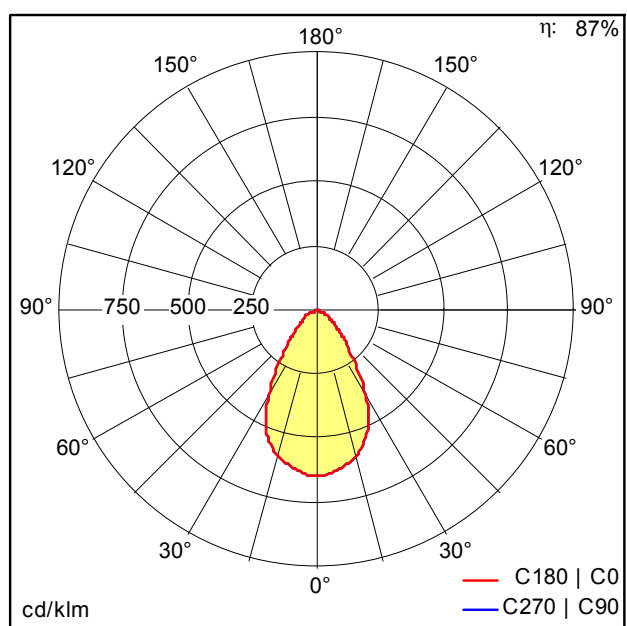

ST7438_M.Idt

- Źródło światła: LED
- Strumień świetlny oprawy*: 1039 lm
- Skuteczność oprawy*: 115 lm/W
- Współczynnik oddawania barw: 90
- Statecznik: 1 x 28001407 LCA 17W 250-700mA one4all SR PRE Z
- Temperatura barwowa*: 3000 Kelvin
- Tolerancja miejscowa barwy (initial Mac Adam): 2
- Średnia żywotność nominalna*:
L90 100000h przy 25°C
L95 50000h przy 25°C
- Moc opraw*: 9 W Współczynnik mocy = 0,96
- Moc w trybie czuwania*: 0,14 W
- sterowanie: LDO ściemniany do 1% poprzez DALI
- : C - Zamknięty u góry odbłyśnik

Ten produkt zawiera źródło światła o klasie efektywności energetycznej C.

Patrz dodatkowe informacje na następnej stronie.



Oprawa LED do wbudowania w suficie