

Oprawa LED do wbudowania w suficie


LED ceiling-recessed luminaire without trim; "stableWhite" LED luminaire, symmetric wide-beam light distribution with maximum luminaire efficiency and optimum photometric properties; lamp(s): LED2500-930; Colour rendering Ra > 90 (R9 > 50), colour temperature 3000 K (warm white); Chromaticity tolerance (initial MacAdam): 2; Luminaire input power: 19 W; Luminaire luminous flux: 2414 lm, Luminaire efficacy: 127 lm/W; service life: 100000h at 90% luminous flux or 50000h at 95% luminous flux; includes separate control unit Slave luminaire for DALI control (DALI only); high-quality reflector unit fixed to modular LED lighting chamber by catch mechanism; high-efficiency LED lighting chamber is integrated in optimised, passive thermal management system of diecast aluminium; reflector: smooth, white painted finish; reflector made of high-quality, UV-resistant polycarbonate; luminaire unit can be fitted quickly without tools using EASY-CLICK catch; IP20; luminaire wired with halogen-free leads; power connection: 5-pole connector terminal, loop-in/loop-out possible; mains voltage: 220-240V / 0/50/60Hz, for use with 220V DC central battery ; installation: tool-free quick installation using spring clips in ceilings of thickness 1-25mm; ceiling cutout: 190x190 mm, recessed depth: 126mm; weight: 1.23 kg;

Note: UGR<19 (aluminized reflector type) for office applications in compliance with EN12464

Note: Please order seating surround (planar surround) separately for installing the luminaire flush with the ceiling (see Accessories)




ZS_PA1_F_Q190_HL_Rahmenlos.jpg

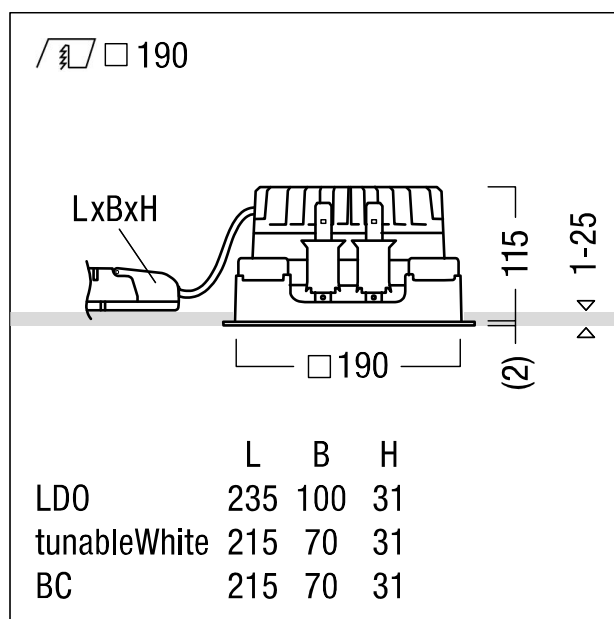

ZS_PA1_M_Q190H_LED_TL.wmf

Dystrybucja światła

STD - Standard

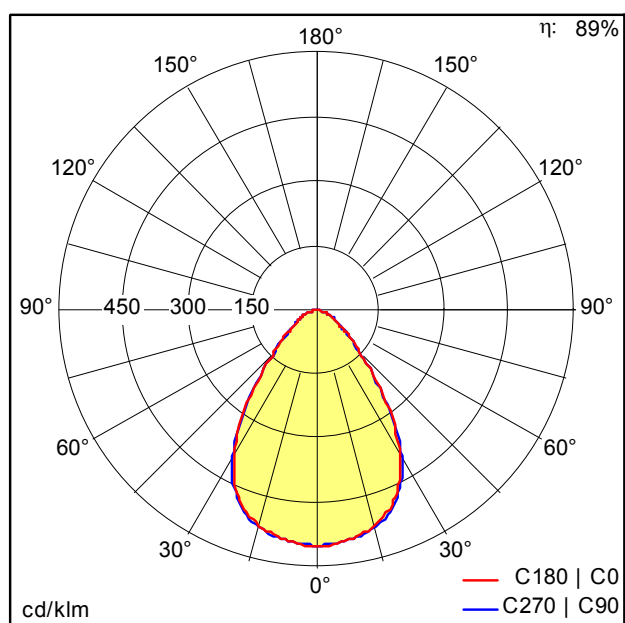

ST7403_M.Idt

- Źródło światła: LED
- Strumień świetlny oprawy*: 2414 lm
- Skuteczność oprawy*: 127 lm/W
- Współczynnik oddawania barw: 90
- Statecznik: 1 x 28001246 LCA 25W 350-1050mA one4all SR PRE Z
- Temperatura barwowa*: 3000 Kelvin
- Tolerancja miejscowa barwy (initial Mac Adam): 2
- Średnia żywotność nominalna*:
L90 100000h przy 25°C
L95 50000h przy 25°C
- Moc oprawy*: 19 W Współczynnik mocy = 0,98
- Moc w trybie czuwania*: 0,1 W
- sterowanie: LDO ściemniany do 1% poprzez DALI
- : C - Zamknięty u góry odbłyśnik

Ten produkt zawiera źródło światła o klasie efektywności energetycznej C.
Patrz dodatkowe informacje na następnej stronie.



Oprawa LED do wbudowania w suficie