


## PCE data sheet

|                        |                                                                                                                                                                                                                                                                                                    |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>013-4v</b>                                                                                                                                                                                                                                                                                      |
| article description    | <b>CEE-plug 16A 3p 4h IP44/IP54 SHARK</b>                                                                                                                                                                                                                                                          |
| description long       | CEE-plug 16A 3p 4h IP44/IP54 SHARK<br>housing material: PA6<br>rated current: 16A<br>number of poles: 3 (2P+PE)<br>clock-position: 4h<br>rated voltage/frequency: 100-130V~ / 50+60Hz<br>contacts: brass nickel plated<br>connection technology: screw terminals<br>IP protection class: IP44/IP54 |
| GTIN (EAN)             | 9003399127120                                                                                                                                                                                                                                                                                      |
| country of origin      | AT                                                                                                                                                                                                                                                                                                 |
| customs number         | 85366990                                                                                                                                                                                                                                                                                           |
| packaging quantity     | 10                                                                                                                                                                                                                                                                                                 |
| minimum order quantity | 10                                                                                                                                                                                                                                                                                                 |

|                            |                         |
|----------------------------|-------------------------|
| ETIM 7.0                   | EC000140                |
| IEC-amperage               | 16 A                    |
| Number of poles            | 3                       |
| Voltage acc. EN 60309-2    | 110 V (50+60 Hz) yellow |
| Clock hour position        | 4 h                     |
| Identification colour      | Yellow                  |
| Degree of protection (IP)  | IP44                    |
| Connection system          | Screwed terminal        |
| Cable entry                | Swivel                  |
| Angle of plug              | Straight                |
| Material                   | Plastic                 |
| Contact material           | CuZn                    |
| Surface treatment contacts | Nickel-plated           |

|                    |           |
|--------------------|-----------|
| a                  | 122 mm    |
| b                  | 86 mm     |
| c                  | 47 mm     |
| K (cable Ø)        | 6-15 mm   |
| SW                 | 42 mm     |
| wire flexible      | 1-2,5 mm² |
| contact screws     | 100 Ncm   |
| strain relief      | 500 Ncm   |
| dismantling length | 50 mm     |
| stripping length   | 10-12 mm  |

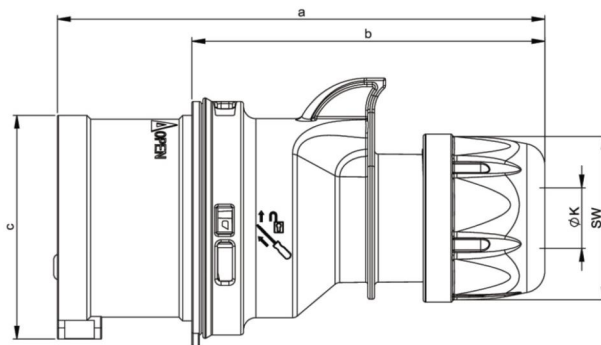

[www.manufacturer-safety.info](http://www.manufacturer-safety.info)