


|                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#            | 547240633                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| article description | CEE-motor protection plug (PKZM0) PI + RFC 32A 4p 6h (4.0-6.3A) IP44                                                                                                                                                                                                                                                                                                                                                                                   |
| description long    | CEE-motor protection plug (PKZM0) PI + RFC 32A 4p 6h (4.0-6.3A) IP44<br>housing material: PC/ABS<br>rated current: 32A<br>number of poles: 4 (3P+PE)<br>clock-position: 6h<br>rated voltage/frequency: 380-415V~ / 50+60Hz<br>contacts: brass nickel plated<br>connection technology: screw terminals<br>rotary lever, motor setting range: 4,0A - 6,3A<br>with phase inverter and rotation field check, cable gland: M32<br>IP protection class: IP44 |
| GTIN (EAN)          | 9003399284595                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| country of origin   | AT                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| customs number      | 85366990                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| net weight          | 0.835 kg                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| packaging quantity  | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

|                            |                 |
|----------------------------|-----------------|
| ETIM 7.0                   | EC000452        |
| Type of motor protection   | Thermal release |
| Type of control element    | Rotary toggle   |
| Phase inverter             | True            |
| Phase sequence monitoring  | True            |
| Adjustable current range   | 4,0 - 6,3 A     |
| Colour plug                | Red             |
| Colour housing             | Grey            |
| Rated voltage              | 400 V           |
| Rated permanent current Iu | 32 A            |

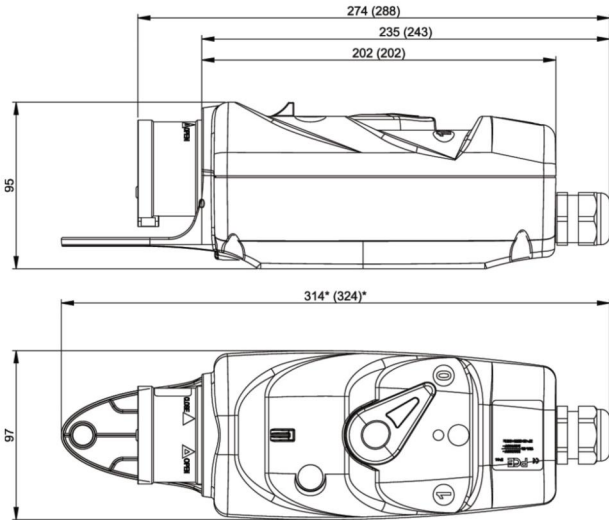

[www.manufacturer-safety.info](http://www.manufacturer-safety.info)