


## PCE data sheet

|                        |                                                                                                                                                                                                                                                                                                    |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>293-3v</b>                                                                                                                                                                                                                                                                                      |
| article description    | <b>CEE-connector 32A 3p 24/42VAC 400Hz IP44 TWIST</b>                                                                                                                                                                                                                                              |
| description long       | CEE-connector 32A 3p 24/42VAC 400Hz IP44 TWIST<br>housing material: PA6<br>rated current: 32A<br>number of poles: 3 (3P)<br>clock-position: 3h<br>rated voltage/frequency: 24/42V~ / 400Hz<br>contacts: brass nickel plated<br>connection technology: screw terminals<br>IP protection class: IP44 |
| GTIN (EAN)             | 9003399224553                                                                                                                                                                                                                                                                                      |
| country of origin      | AT                                                                                                                                                                                                                                                                                                 |
| customs number         | 85366990                                                                                                                                                                                                                                                                                           |
| net weight             | 0.177 kg                                                                                                                                                                                                                                                                                           |
| packaging quantity     | 10                                                                                                                                                                                                                                                                                                 |
| minimum order quantity | 10                                                                                                                                                                                                                                                                                                 |

|                           |                                  |
|---------------------------|----------------------------------|
| ETIM 7.0                  | EC001320                         |
| IEC-amperage              | 32 A                             |
| Number of poles           | 3                                |
| Voltage acc. EN 60309-2   | 20-25 V / 40-50 V (400 Hz) green |
| Clock hour position       | 3 h                              |
| Degree of protection (IP) | IP44                             |
| Connection system         | Schraubklemme                    |
| Angle of plug             | Straight                         |
| Cable entry               | Verschraubung                    |
| Material                  | Plastic                          |

|                    |                      |
|--------------------|----------------------|
| a                  | 150 mm               |
| b                  | 75 mm                |
| K (cable Ø)        | 9,5-24 mm            |
| SW                 | 48 mm                |
| wire flexible      | 1-10 mm <sup>2</sup> |
| contact screws     | 160 Ncm              |
| strain relief      | 600 Ncm              |
| dismantling length | 70 mm                |
| stripping length   | 14-16 mm             |

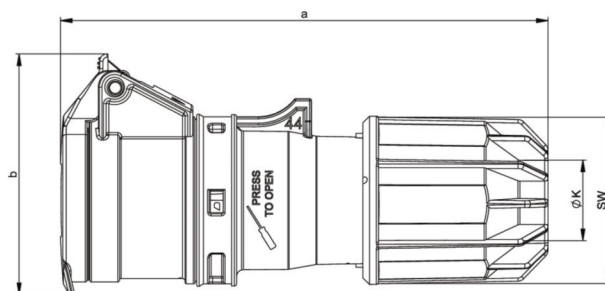

[www.manufacturer-safety.info](http://www.manufacturer-safety.info)