


## PCE data sheet

|                        |                                                 |
|------------------------|-------------------------------------------------|
| article#               | <b>20241-uc</b>                                 |
| article description    | <b>Connector w. cap + child protection IP68</b> |
| description long       |                                                 |
| GTIN (EAN)             | 9003399277092                                   |
| country of origin      | AT                                              |
| customs number         | 85366990                                        |
| net weight             | 0.139 kg                                        |
| packaging quantity     | 10                                              |
| minimum order quantity | 10                                              |

|                                               |                  |
|-----------------------------------------------|------------------|
| ETIM 7.0                                      | EC001327         |
| Model                                         | Earthing pin     |
| Material                                      | Plastic          |
| Material quality                              | Thermoplastic    |
| For heavy conditions (in accordance with VDE) | False            |
| Degree of protection (IP)                     | IP68             |
| Angle of plug                                 | Straight         |
| Connection system                             | Screwed terminal |
| Suitable for protective contact pin           | True             |
| Colour                                        | Green            |
| RAL-number                                    | 6031             |
| Number of poles                               | 3                |
| Nominal voltage                               | 250 V            |
| Nominal current                               | 16 A             |

|                    |                       |
|--------------------|-----------------------|
| K (cable Ø)        | 6-19 mm               |
| wire flexible      | 1-2,5 mm <sup>2</sup> |
| contact screws     | 100 Ncm               |
| strain relief      | 400 Ncm               |
| dismantling length | 30 mm                 |
| stripping length   | 7 mm                  |

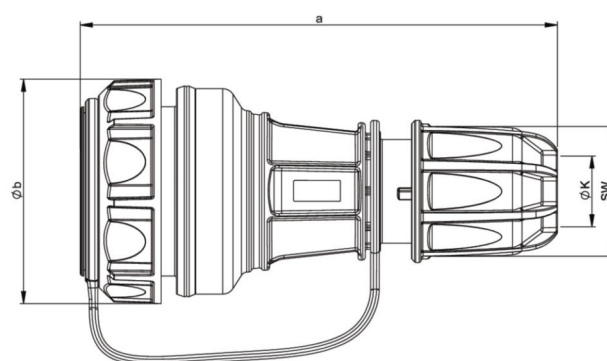

[www.manufacturer-safety.info](http://www.manufacturer-safety.info)