
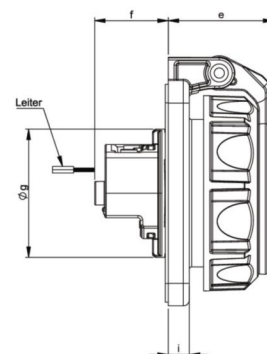


## PCE data sheet

|                        |                                                                         |
|------------------------|-------------------------------------------------------------------------|
| article#               | <b>20352-8u</b>                                                         |
| article description    | <b>Flanged socket w. hinged lid 75x75 IP68</b>                          |
| description long       | Schutzkontakt-Anbausteckdose 75x75 nat Klappdeckel IP66/68 (bronzegrün) |
| GTIN (EAN)             | 9003399277252                                                           |
| country of origin      | AT                                                                      |
| customs number         | 85366990                                                                |
| net weight             | 0.105 kg                                                                |
| packaging quantity     | 10                                                                      |
| minimum order quantity | 10                                                                      |

|                                               |                             |
|-----------------------------------------------|-----------------------------|
| ETIM 8.0                                      | EC001325                    |
| Model                                         | Protective contact (SCHUKO) |
| Material                                      | Plastic                     |
| Material quality                              | Thermoplastic               |
| Flange size                                   | 75x75 mm                    |
| With hinged lid                               | True                        |
| For heavy conditions (in accordance with VDE) | True                        |
| Degree of protection (IP)                     | IP68                        |
| Angle of plug                                 | Straight                    |
| Connection system                             | Screwed terminal            |
| Colour                                        | Green                       |
| Number of poles                               | 3                           |
| Nominal current                               | 16 A                        |
| Nominal voltage                               | 250 V                       |

|                  |                         |
|------------------|-------------------------|
| wire flexible    | 1-2x2,5 mm <sup>2</sup> |
| wire solid       | 1-2x2,5 mm <sup>2</sup> |
| contact screws   | 80 Ncm                  |
| stripping length | 7 mm                    |

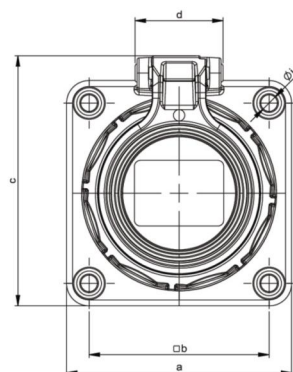

<https://www.pcelectric.at/shop/en/?func=detail&artnr=20352-8u>



[www.manufacturer-safety.info](http://www.manufacturer-safety.info)