

system szyn zbiorczych, akcesoria Odległość środków szyn 40mm wspornik szyn zbiorczych 3-biegunowy 12x 5, 2x12x 5, 15x 5, 2x15x 5 jako uchwyt końcowy i pośredni z wkładkami do grubości szyny 5mm i z osłonami końcowymi



Figure similar

Wersja	
Nazwa markowa produktu	SETRON
oznaczenie produktu	Uchwyt szyny zbiorczej
napięcie robocze przy AC wartość znamionowa	690 V
rodzaj przekrojów poprzecznych możliwych do podłączenia przewodów dla przewodów Cu wielożyłowy	12 mm x 5 mm – 15 mm x 10 mm
Konstrukcja mechaniczna	
odstęp między środkami szyn	40 mm
Zezwolenia Certyfikaty	
General Product Approval	Test Certificates



[Confirmation](#)




[Miscellaneous](#)

Marine / Shipping	other	Environment
		Environmental Confirmations

[Miscellaneous](#)

[Confirmation](#)

Więcej informacji
Informacje dotyczące opakowania Informacje dotyczące opakowania
Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/lowvoltage/catalogs
Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8US1903-3AB00
Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/pl/ps/8US1903-3AB00
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8US1903-3AB00
CAX-Online-Generator http://www.siemens.com/cax
Tender specifications http://www.siemens.com/specifications

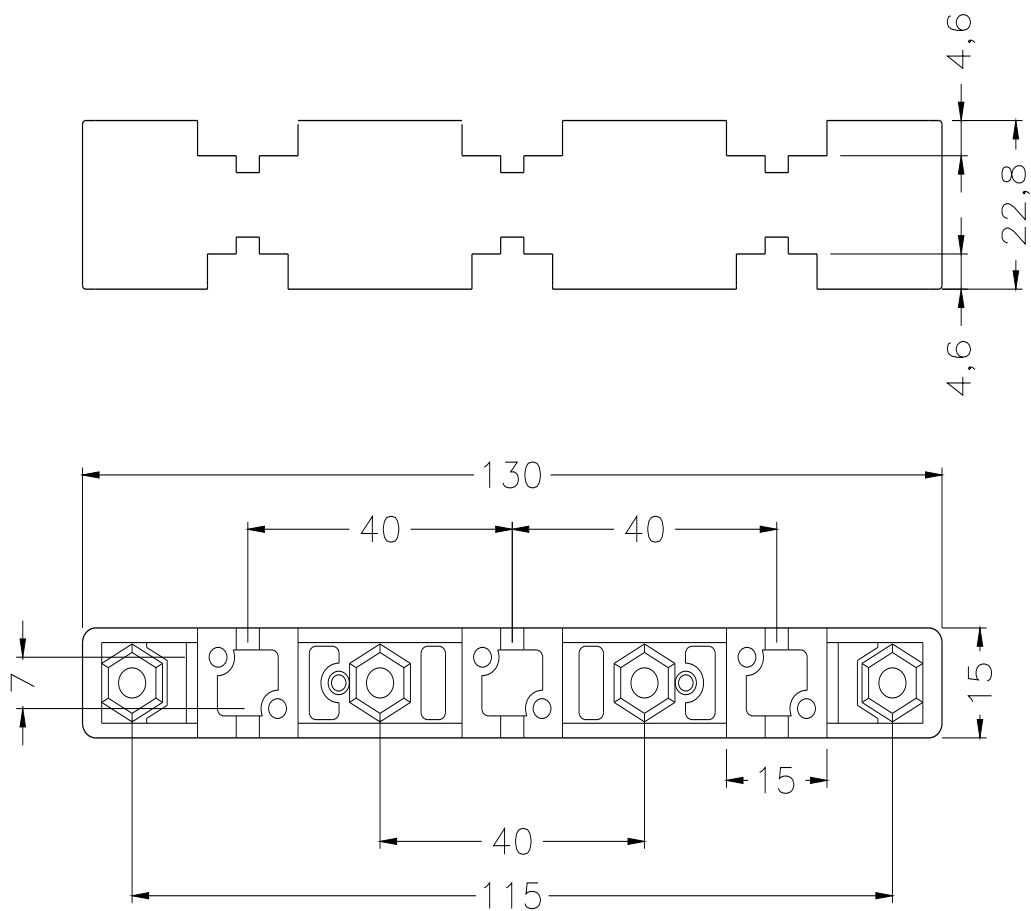

Ostatnia zmiana:

28.09.2021 

