


Przewód AS-i, profilowany do zewnętrznego napięcia pomocniczego 24 V czarny, PUR, olejoodporny, 2 x 1,5 mm², 100 m składa się ze 100 m przewodu aprobaty do przemysłu stoczniowego



Ogólne dane techniczne	
wykonanie produktu	Profilowane przewody AS-Interface
Dane mechaniczne	
Promień zgięcia	
• w przypadku przewodu ułożonego na stałe minimalnie dozwolony	12 mm
• w przypadku ruchomego przewodu minimalnie dozwolony	24 mm
Aprobata/ Certyfikaty	
General Product Approval	other

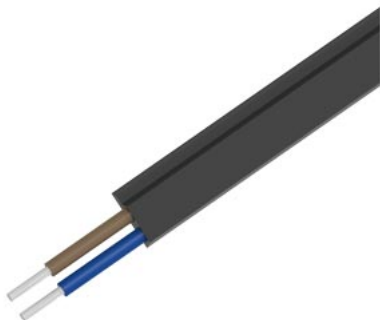

[Confirmation](#)



[Confirmation](#)

Więcej informacji
Informacje dotyczące opakowania Informacje dotyczące opakowania Information- and Downloadcenter https://www.siemens.com/ic10 Industry Mall (System zamawiania online) https://mall.industry.siemens.com/mall/pl/pl/Catalog/product?mlfb=3RX9025-0AA00 CAx-Online-Generator http://support.automation.siemens.com/WW/CAxOrder/default.aspx?lang=en&mlfb=3RX9025-0AA00 Service&Support https://support.industry.siemens.com/cs/ww/en/ps/3RX9025-0AA00 Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RX9025-0AA00&lang=en

Ostatnia zmiana: 23.12.2020