

Odgałęzienie M12 interfejsu AS-i U_ASI bez Uaux, kabel 1 m oraz
Gniazdo kablowe M12 kątowe IP67/68/69K, maksymalnie 4 A



Ogólne dane techniczne		
prąd roboczy wartość znamionowa	A	3
Przylączy/ Zaciski		
wykonanie przylączy elektrycznego		Przylączy nakłuwane do płaskiego kabla AS-Interface
Dane mechaniczne		
Moment dociągający śrub montażowych	N·m	1,65 ... 1,65
Warunki środowiska		
temperatura otoczenia	°C	-25 ... +75
temperatura otoczenia podczas magazynowania	°C	-25 ... +85
Aprobaty/ Certyfikaty		
General Product Approval	EMV	Marine / Shipping



EG-Konf.

[Confirmation](#)



UL



RCM




PRS

other

[Confirmation](#)

Więcej informacji
Informacje dotyczące opakowania Informacje dotyczące opakowania Information- and Downloadcenter https://www.siemens.com/ic10 Industry Mall (System zamawiania online) https://mall.industry.siemens.com/mall/pl/pl/Catalog/product?mlfb=3RK1901-2NR11 CAx-Online-Generator http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1901-2NR11 Service&Support https://support.industry.siemens.com/cs/ww/en/ps/3RK1901-2NR11 Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1901-2NR11&lang=en

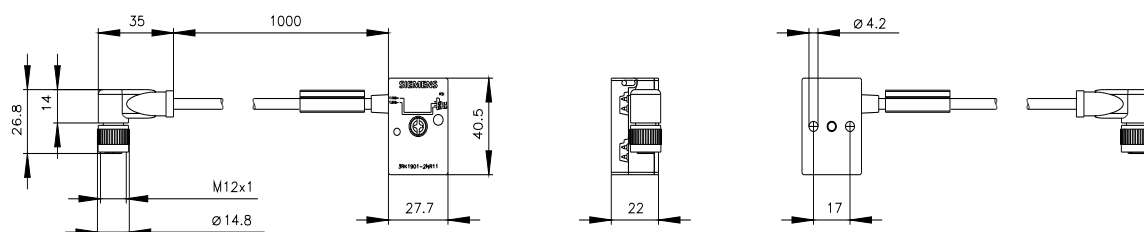

Ostatnia zmiana:

12.01.2021 