




Wymiary [mm (in)]

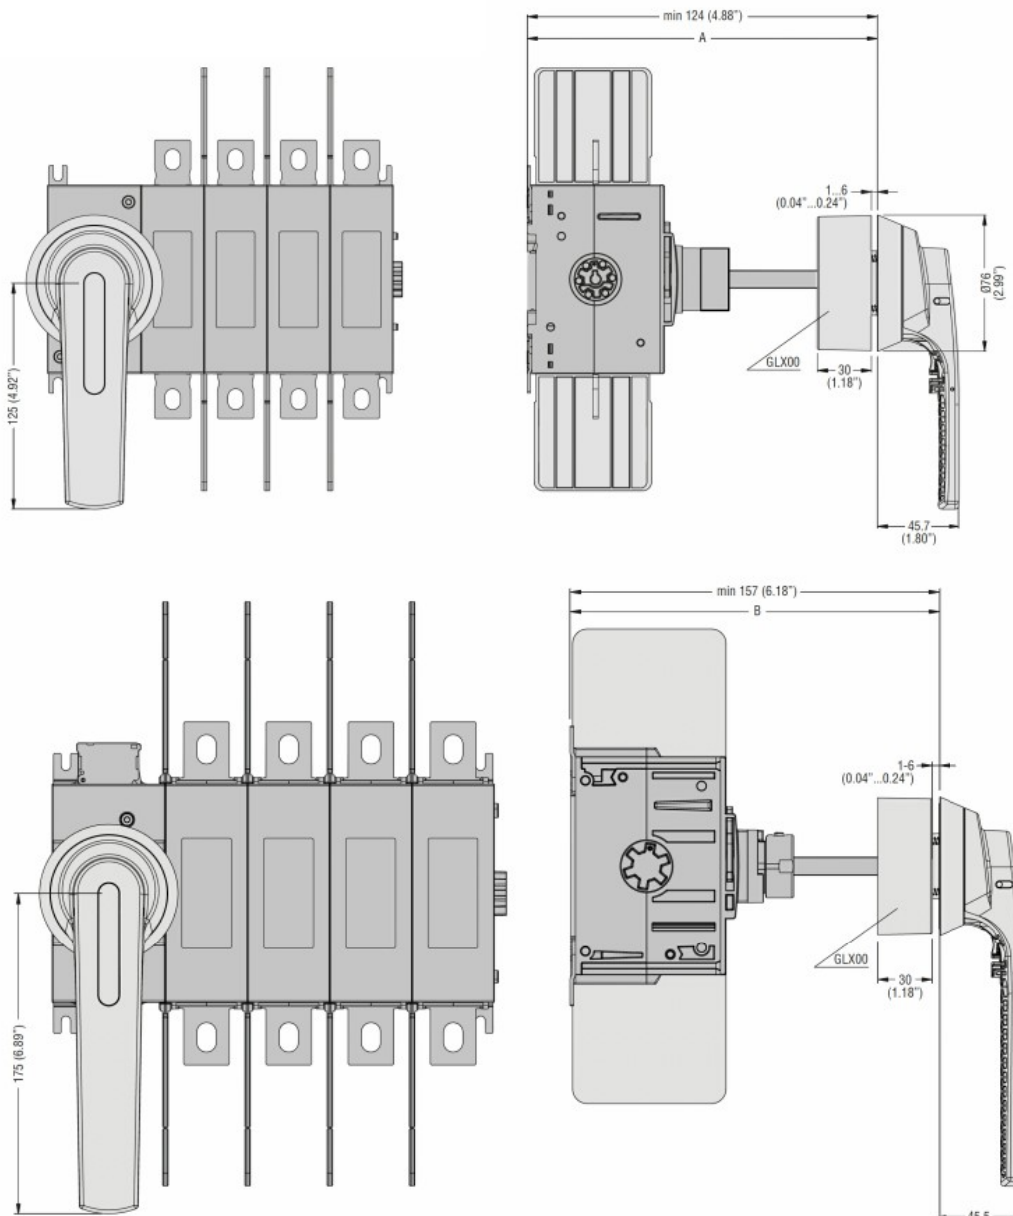

GLX7...S10	A mm (in)
with GLC0100...GL0315	min max
GLX7150S10	124...194 (4.88...7.64")
GLX7200S10	124...244 (4.88...9.61")
GLX7300S10	124...344 (4.88...13.54")
GLX7400S10	124...444 (4.88...17.48")
GLX7500S10	124...544 (4.88...21.42")

GLX7...S10	B mm (in)
with GLC0320...GL0630	min max
GLX7150S10	157...227 (6.18...8.94")
GLX7200S10	157...277 (6.18...10.90")
GLX7300S10	157...377 (6.18...14.84")
GLX7400S10	157...477 (6.18...18.78")
GLX7500S10	157...577 (6.18...22.72")

Certyfikaty i zgodność

Zgodność

IEC/EN 60947-1

IEC/EN 60947-3

Certyfikaty

cULus

Klasyfikacja ETIM

ETIM 8,0

EC002498 -
Akcesoria/części
zamienne do
aparatury
niskonapięciowej