


## Oprawa świetłówkowa LED

Linear, energy-efficient TECTON LED continuous-row luminaire with 64 highly efficient mid-power LEDs per segment. Luminaire input power: 43.4 W, DALI controllable luminaire with LED converter, makes environmental and financial sense. LED service life lasts 100000 h before luminous flux is reduced to 95% of the initial value. Chromaticity tolerance (initial MacAdam): 2. Luminaire efficacy: 144 lm/W. Luminaire luminous flux: 6270 lm. Luminaire with WALLWASHER distribution characteristic. Colour rendering Ra > 80, colour temperature 3000 K. Split lens concept for reducing perceived glare. Overlapping PMMA lenses achieve IP50 protection for LED and optic. All-in-one solution: lighting batten, lamp and reflector are combined in one product to produce a 100 % continuous ribbon of LED light without gaps. High-quality look in a design that matches the trunking. Dimming level for DC mode preset to 15 %. LED continuous-row luminaire of sheet steel, enamelled in polyester lacquer finish, black. 100% flexible, tool-free mechanical and electrical installation using CLIX-technology by means of two side-mounted rotary levers on the TECTON trunking. No ultraviolet or infrared radiation. The black powder-coated aluminium reflector supplied with the luminaire click-fits onto the luminaire without tools (can be fitted on either side). Please order reflector end caps separately. Ambient temperature: -20°C to +40°C. Luminaire wired with halogen-free leads, silicone-free. Note: please talk to your adviser if you are planning to use the luminaire in environments containing chemical pollutants. Dimensions: 1997 x 62 x 146 mm. Weight: 3.6 kg.




ZS\_TEC\_F\_LED\_asym\_beam\_BK.jpg

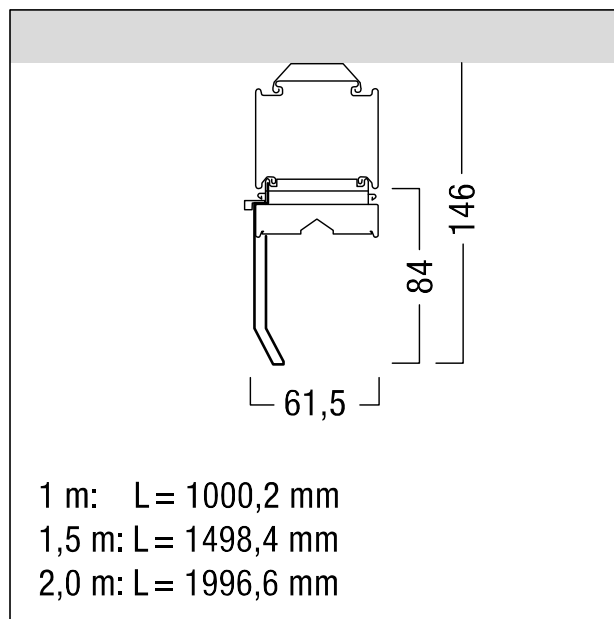

ZS\_TEC\_M\_C\_LED\_REFL\_ASYM.wmf

## Dystrybucja światła

## STD - Standard

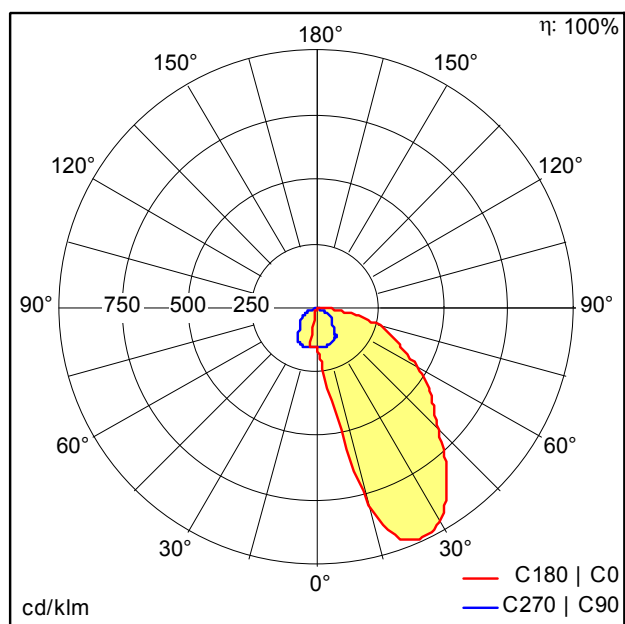

D34983AA\_TECTON\_C\_LED7400-830\_L2000\_WW\_LDE\_BK.Idt

- Źródło światła: LED
- Strumień świetlny oprawy\*: 6270 lm
- Skuteczność oprawy\*: 144 lm/W
- Współczynnik oddawania barw: 80
- Temperatura barwowa\*: 3000 Kelvin
- Tolerancja miejscowa barwy (initial Mac Adam): 2
- Średnia żywotność nominalna\*:  
L95 100000h przy -20°C  
L95 100000h przy 40°C
- Statecznik: 1x LED\_Con Tridonic LCA 75W 100-400mA  
one4all Ip PRE (28000657)
- Moc oprawy\*: 43,4 W Współczynnik mocy = 0,93
- Moc w trybie czuwania\*: 0,15 W
- sterowanie: LDE ściemniany do 1%  
poprzez DALI, DSI i switchDIM  
Poziom DC możliwość regulacji
- : D - Zamknięta IP2X
- Total harmonic distortion (THD): 8,00 %

Ten produkt zawiera źródło światła o klasie efektywności energetycznej C.

Patrz dodatkowe informacje na następnej stronie.

