


PCE data sheet

article#	61392-4
article description	CEE-inlet flange 75x75 straight 20A 2P3W 4h IP67 UL
description long	CEE-inlet flange 75x75 straight 20A 2P3W 4h IP67 UL (PCE320B4W) housing material: PA6 rated current: 16A/20A number of poles: 2P3W (3p) clock position: 4h rated voltage: 120Vac contacts: brass connection technology: screw terminals dimensions (flange/fixing center): 75x75mm / 60x60mm IP protection class: IP67
GTIN (EAN)	9003399492105
country of origin	AT
customs number	85366990
net weight	0.109 kg
packaging quantity	10

ETIM 7.0	EC001319
IEC-amperage	16 A
Amperage acc. UL/CSA (for UL-version)	20 A
Number of poles	3
Clock hour position	4 h
Identification colour	Yellow
Degree of protection (IP)	IP67
Connection system	Screwed terminal
Construction type	Built-up device plug
Angle of plug	Angled
Material	Plastic
Contact material	CuZn
Surface finish contacts	Untreated

wire flexible	1-2,5 mm ²
wire solid	1-4 mm ²
contact screws	100 Ncm
dismantling length	50 mm
stripping length	10-12 mm

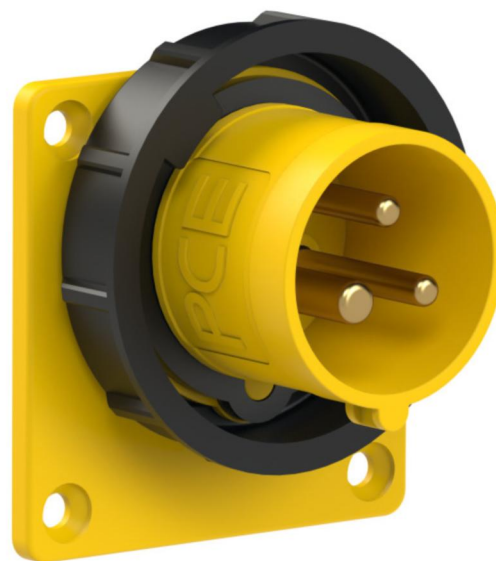

www.manufacturer-safety.info