




Oprawa bezpieczeństwa

LED emergency luminaire for antipanic lighting with min. 0,5 lux acc. to EN 1838; Room height 2.2 to 7 m; 2 high power LEDs, neutral white 4,000 K; lens of polycarbonate; optimum thermal management via heat sink; Ceiling surface-mounted luminaire; Screw mounting of the gear tray and IP65 cover; Luminaire housing made of diecast aluminium, powder-coated; housing colour white (close to RAL9016); White fibre-glass reinforced PC cover with transparent PC light outlet; Luminaire for central emergency light supply, for single monitoring of the luminaire via Powerline in connection with the eBox System, settable emergency light level; NFC interface for addressing, configuration and maintenance via PROset Pen (article no.: 22170290) or PROset app; addressing also alternatively possible visually or via EZ-addressing; Maintained and non-maintained mode: -40°C to +45°C; power supply: 220-240 V AC (+/- 10%) 50-60 Hz; 176-280 V DC; Luminaire input power: 3.8 W (in maintained mode); Power in non-maintained mode: 0,3 W; Non-maintained and maintained mode settable via the central battery system; boost start function for faster orientation in emergencies thanks to higher illuminance levels at the start of emergency operation; IP65; SC1; Luminaire wired with halogen-free leads. Supply line not halogen-free, ballproof; Plug-in terminals for through-wiring up to 2.5 mm²; Impact strength: IK04; Dimensions: 200 x 145 x 64 mm; weight: 0.83 kg; Luminaire with D symbol (for use in environments in which the accumulation of conductive dust on the luminaire can be expected);




ZS_RES_F_PRO_MSC_IP65_ECx_ANT_WH.jpg

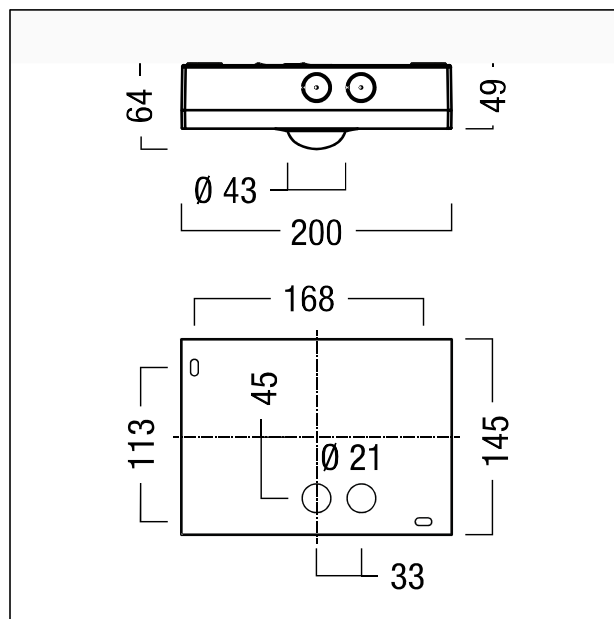

ZS_RES_M_PRO_MSC_IP65.wmf

Dystrybucja światła

STD - Standard

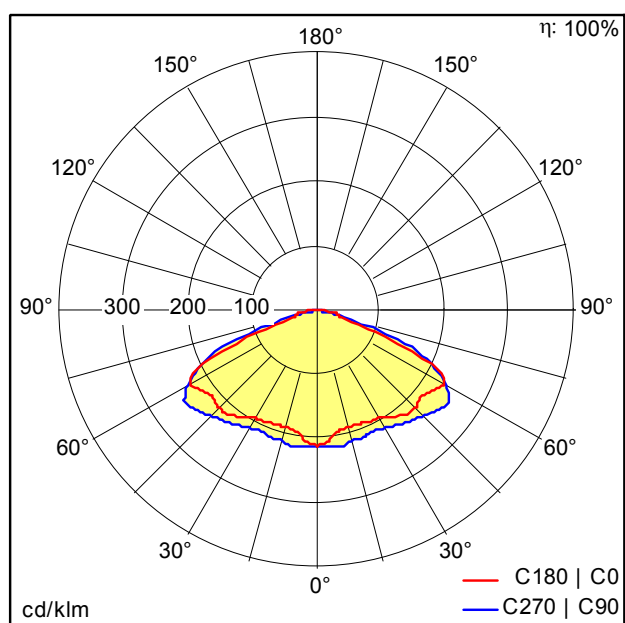

D43508_RESC_PRO_MSC_ANT_ECP_WH_IP65.idt

- Źródło światła: LED
- Strumień świetlny oprawy*: 240 lm
- Całkowity strumień "awaryjny": 240 lm
- Skuteczność oprawy*: 63 lm/W
- Współczynnik oddawania barw: 70
- Statecznik: 1 x 89800573 DRV EM TR CPS P NO PLC 5W 2
- Tolerancja miejscowa barwy (initial Mac Adam): 5
- Średnia żywotność nominalna*: L95 100000h przy 25°C
- Moc oprawy*: 3,8 W Współczynnik mocy = 0,65
- sterowanie: PLC ściemniany do 10%
- : D - Zamknięta IP2X

Wartości oznaczone gwiazdką (*) są wartościami znamionowymi. Inicjalna tolerancja mocy oraz strumienia świetlnego wynosi +/-10%. Jeżeli nie podano inaczej, wartości te obowiązują dla temperatury 25°C

