EXS0000

MODUŁ MAGISTRALI DO SYSTEMU EASY BRANCH

Przeznaczenie produktu			Moduł magistrali EASY BRANCH
Seria produktu			EXS0000
Zasilanie pomocnicze Us			
Pomocnicze znamionowe napięcie zasilania DC		VDC	24
Zakres pomocniczego napięcia roboczego			
DC			
	min.	VDC	20.4
	maks.	VDC	27.6
Maksymalne rozproszenie mocy		W	5.5
Właściwości mechaniczne			
Materiał obudowy			Poliamid
Typ zacisków			Śruba
Przekrój poprzeczny przewodu			
	min.	mm²	0.2
	maks.	mm²	2.5
	min.	AWG	12
	maks.	AWG	24
Moment dokręcania maks.			
		Nm	0.5
		lbin	4.5
Masa		g	90
Warunki otoczenia			
Temperatura			
Temperatura pracy			
	min.	°C	-20
	maks.	°C	+60
Temperatura składowania			
	min.	°C	-30
	maks.	°C	+80
Wilgotność względna		%	<80
Maksymalny stopień zanieczyszczenia			2
Kategoria przepięciowa			3
Stopień ochrony			IP20
Wymiary [mm (in)]			

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

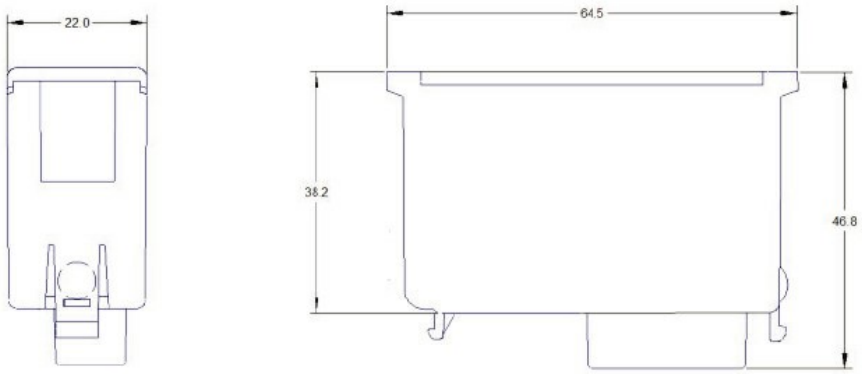

Certyfikaty i zgodność

Zgodność	
	IEC/EN/BS 61000-6-2
	IEC/EN/BS 61000-6-4
	IEC/EN/BS 61010-1
Certyfikaty	
	CE
	EAC
	UKCA

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding