


Kanał do linii świetlnej LED

Surface-mounted Channel for LED light line made of aluminium, black (similar to RAL 9005), powder coated. Dimensions: 1000 x 76 x 92 mm. Weight: 2.25 kg. Degree of protection: IP54. Impact strength: IK07. Dimensions: 1000 x 76 x 92 mm weight: 2.25 kg. Slotlight Infinity II consists of a channel, LED batten, cover and accessories, which must be configured and ordered separately. Impact resistance: IK07 in combination with PC, PCO or WW optic, IK05 with DD optic and IK03 with Minicell. Protection rating IP54 for wall mounting with L-bracket as well as mounting with ceiling mounting spring and cord suspension in IP40 and IP54 version. For direct ceiling and wall mounting: protection rating IP40. Ball impact protection for ceiling mounting directly to the ceiling or pendant suspension with ball impact protection chain. No ball impact protection is possible in combination with Minicell. This product is one part of the complete configuration.



ZS_SL2_F_MSC_BK.jpg

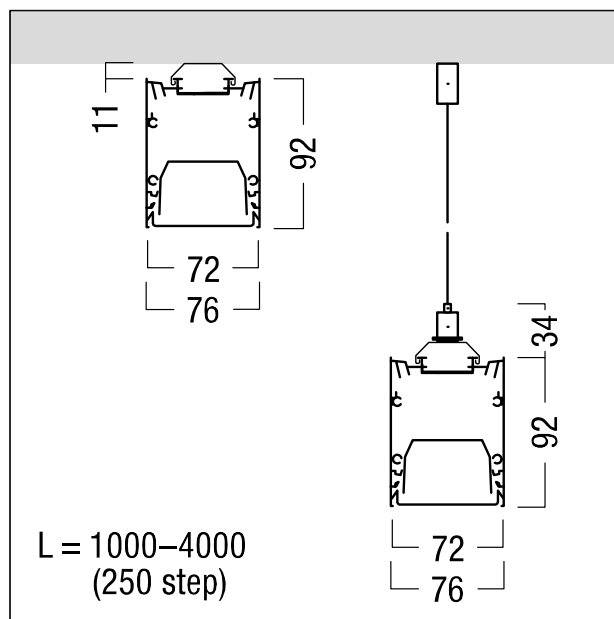

ZS_SL2_M_MSC.wmf

Dystrybucja światła

STD - Standard