


## PCE data sheet

|                        |                                                                                                                                                                                                                                                                                                                                      |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>2253-6ttv</b>                                                                                                                                                                                                                                                                                                                     |
| article description    | <b>CEE-connector 32A 5p 6h IP54 GRIP TT</b>                                                                                                                                                                                                                                                                                          |
| description long       | CEE-connector 32A 5p 6h IP54 GRIP TT<br>housing material: 2K (PA6/TPE)<br>rated current: 32A<br>number of poles: 5 (3P+N+PE)<br>clock-position: 6h<br>rated voltage/frequency: 200/346V~ - 240/415V~ / 50+60Hz<br>contacts: brass nickel plated<br>connection technology: screwless terminals (TT)<br>IP protection class: IP44/IP54 |
| GTIN (EAN)             | 9003399439407                                                                                                                                                                                                                                                                                                                        |
| country of origin      | AT                                                                                                                                                                                                                                                                                                                                   |
| customs number         | 85366990                                                                                                                                                                                                                                                                                                                             |
| net weight             | 0.315 kg                                                                                                                                                                                                                                                                                                                             |
| packaging quantity     | 10                                                                                                                                                                                                                                                                                                                                   |
| minimum order quantity | 10                                                                                                                                                                                                                                                                                                                                   |

|                           |                      |
|---------------------------|----------------------|
| ETIM 7.0                  | EC001320             |
| IEC-ampereage             | 32 A                 |
| Number of poles           | 5                    |
| Voltage acc. EN 60309-2   | 400 V (50+60 Hz) red |
| Clock hour position       | 6 h                  |
| Identification colour     | Red                  |
| Degree of protection (IP) | IP54                 |
| Connection system         | Screw less terminal  |
| Angle of plug             | Straight             |
| Cable entry               | Swivel               |
| Material                  | Plastic              |
| Contact material          | CuZn                 |
| Surface finish contacts   | Nickel-plated        |

|                    |            |
|--------------------|------------|
| a                  | 194 mm     |
| b                  | 134 mm     |
| c                  | 105 mm     |
| K (cable Ø)        | 11,5-22 mm |
| SW                 | 50 mm      |
| wire flexible      | 2,5-6 mm²  |
| strain relief      | 600 Ncm    |
| dismantling length | 50 mm      |
| stripping length   | 12-14 mm   |

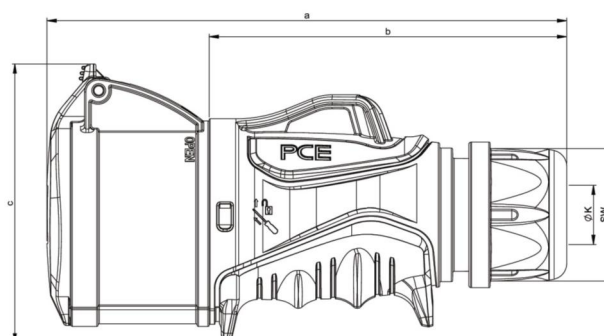

[www.manufacturer-safety.info](http://www.manufacturer-safety.info)