

Elsa Vario Flex

LED Bathroom Mirror Luminaire



Splash resistant, practical and attractive at the same time, Elsa Vario Flex takes care of your looks

- FLEX Feature (Lumen switch): Decide on your lumen package per lumen switch directly on site for two sizes (450 mm and 600 mm)
- VARIO Feature (Colour temperature switch): 3000 K (warm white), 3500 K or 4000 K (neutral white)
- Colour Rendition ≥ 90 for your best look in front of the mirror
- Bathroom mirror luminaire with an elegant and timeless design
- Opal diffuser ensuring visual comfort and a fully homogeneous illumination
- Integrated on/off switch or sensor option (daylight & presence) available
- Tool-free wiring for quick installation



CCT switch
(3000 K, 3500 K
and 4000 K)



Lumen switch
(2 sizes with
switchable
lumen
packages)



Ideal colour
rendering for
makeup



IP44 splash
resistant
and IK08
rated impact
resistance



Daylight and
presence



50000 h lifetime
before luminous
flux is reduced
to 70% of the
initial value

Ideal for ...



Sanitary rooms

Installation/Mounting


- Suitable for surface mounting
- Tool-free wiring with push terminal
- Sufficient space at the back of the batten for excess cable

Material/Finish

Body: Aluminum, white finish (RAL 9016)

Diffuser: PC, opal


End cap: PC, white finish (RAL 9016)



Facilitating life

VARIO & FLEX Feature

There is no need to worry about lumen packages or colour temperatures anymore – it's always the same product and the adaption to your needs can be done directly on site:

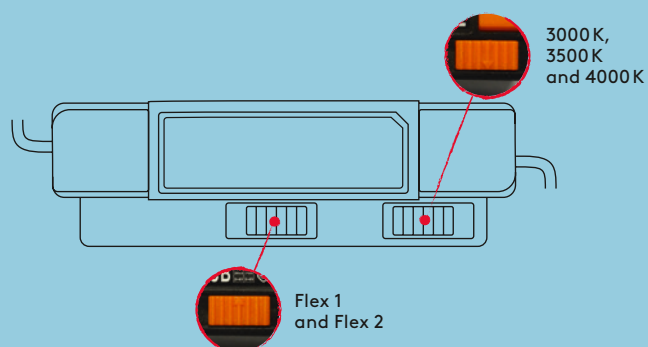


And of course your morning smile will be presented in the best light with **CRI ≥ 90** – no matter which colour temperature you choose.

Presence and daylight detection

Elsa Vario Flex's microwave sensor option will ensure that light is only delivered when needed. This sensor is a motion switch, which turns on the light on detection of movement, and turns off after a pre-selected hold-time when there are no people around. This leaves the luminaire with a clean finish, as no on/off switch is used. A daylight sensor is also built-in to prevent the light switching on when there is sufficient natural light.

Sensor Range

at 100 % sensitivity

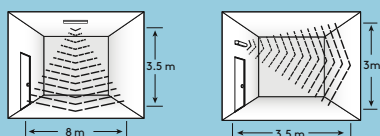

Controllability (default)


Sensitivity	25 %, 50 %, 75 %, 100 %
Time	10s, 1 min, 5 min, 10 min, 15 min, 20 min, 25 min, 30 min
lux	10 lux, 20 lux, 50 lux, 100 lux, 300 lux, 500 lux, disable

Ordering guide

Description	SAP Code
ELSA VARIOFLEX 450 800 930/35/40	96635659
ELSA VARIOFLEX 450 800 930/35/40 MWS	96635660
ELSA VARIOFLEX 600 1200 930/35/40	96635661
ELSA VARIOFLEX 600 1200 930/35/40 MWS	96635662

MWS: microwave presence sensor

Portfolio Overview

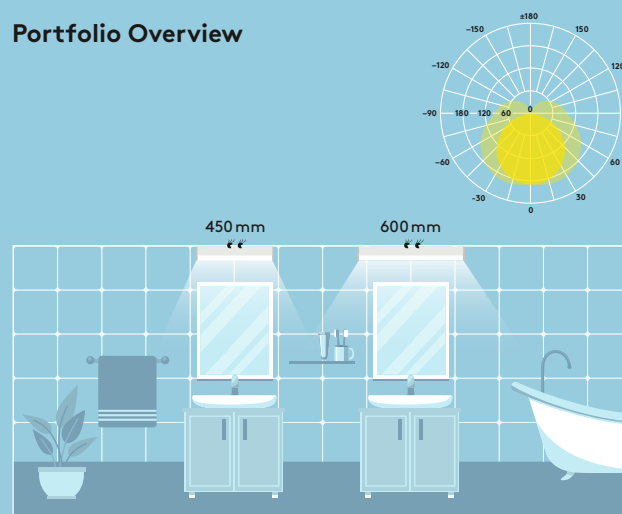

Light source information

- Flex @4000K: 450 mm 600mm

800lm	1200lm
600lm	900lm
- Vario: 3000K, 3500K & 4000K
- Efficiency up to 100lm/W
- Life time 50 000 hours (@L70, Ta 25°C)
- MacAdam (initial): 4 step
- CRI ≥ 90

Specification

- Class II electrical
- IP44
- IK08
- Ambient operating temperature: -20 to +40°C



Five year guarantee