

Emma Vario Flex

LED Batten



Sleek and sophisticated,
Emma Vario Flex' effortless
style fits right in

- FLEX Feature (Lumen switch): Decide on your lumen package per lumen switch directly on site for three sizes (600 mm, 1200 mm and 1500 mm)
- VARIO Feature (Colour temperature switch): 3000 K (warm white), 3500 K or 4000 K (neutral white)
- Fully homogeneous illumination
- Elegant design: lightweight brushed aluminum profile
- High efficacy of up to 145 lm/W – exceeding building regulation requirements
- Mounting directly onto ceiling or by using flexible mounting brackets for any fixing hole distance



CCT switch
(3000 K, 3500 K
and 4000 K)



Lumen switch
(3 sizes with
switchable
lumen
packages)



50 000 h lifetime
before luminous
flux is reduced
to 80 % of the
initial value



600 mm
1200 mm
and 1500 mm



IK08 rated
impact
resistance

Ideal for ...






Breakout areas



Circulation corridors




Cove lighting

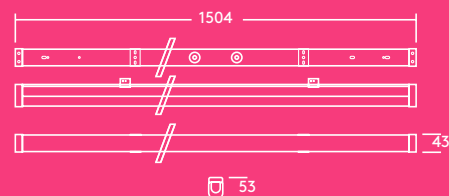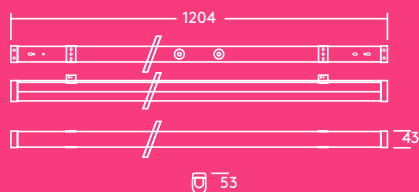

Facilitating life

VARIO & FLEX Feature

There is no need to worry about lumen packages or colour temperatures anymore – it's always the same product and the adaption to your application can be done directly on site:

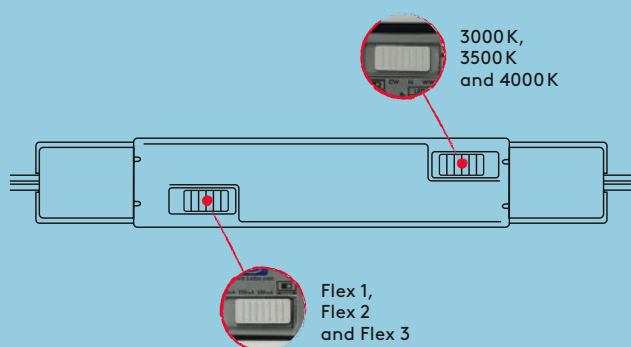

Light source information

- Flex @ 4000 K:

600 mm	1200 mm	1500 mm
2000lm	4000lm	6000lm
1500lm	3000lm	4500lm
1000lm	2000lm	3000lm
- Vario: 3000K, 3500K & 4000K
 - 50 000 hours rated life (@L80, Ta 25°C)
 - Efficiency up to 145lm/W
 - MacAdam (initial): 5 step
 - CRI 80


Specification

- Class I electrical
- IP20
- IK08
- Ambient operating temperature: -20 to +40°C

Ordering guide

Description	SAP Code
EMMA VARIO FLEX 1200 4000 830/35/40	96635574
EMMA VARIO FLEX 1500 6000 830/35/40	96635575
EMMA VARIO FLEX 600 2000 830/35/40	96635573
Accessories	
EMMA VARIO FLEX SUSPENSION KIT	96635576

Portfolio Overview

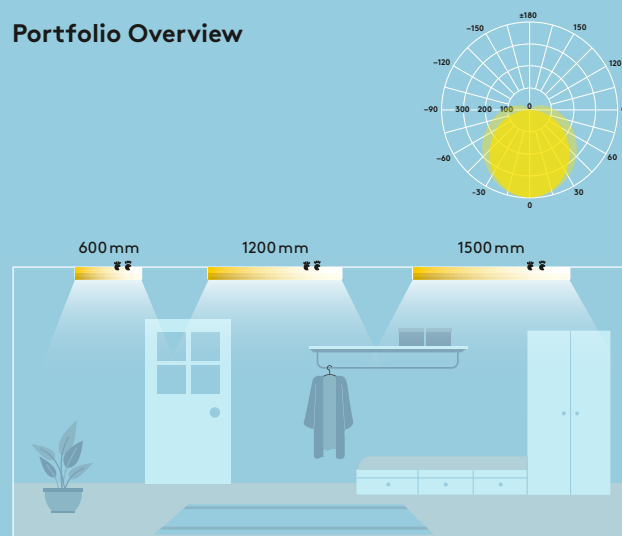

Installation/Mounting

- Surface mounting directly onto ceiling or with surface mount brackets (included)
- Suspended mounting with suspension kit (optional)

Material/Finish

Body: Aluminum
 Diffuser: PC, opal white
 End caps: PC, white (RAL 9016)
 Ceiling clips: Stainless steel

