


Luca

LED Spotlight

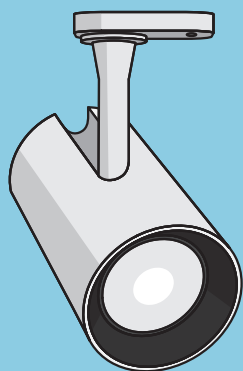

Ideal for:
Retail/outlets, supermarkets,
exhibition halls and DIY/furniture

With its modern design and unobtrusive integration,
Luca sets the focus and attention where it needs to be.



IP20




CRI 90

- CRI 90 for best colour rendition to focus the attention on the product or art
- Available in 3 sizes: Small (54 mm), Medium (69 mm) and Large (79 mm)
- Versatile - each product has two interchangeable lenses offering different beam angles
- 90° tilt and 350° rotation make Luca adjustable to your display needs
- Universal adapter suitable for most 3-phase tracks



	Ø	W	H1	H2	Beam angle
LUCA S	54	110	154	120	15°/38°
LUCA M	69	140	178	136	24°/38°
LUCA L	79	146	179	146	24°/38°
Dimensions (mm)					

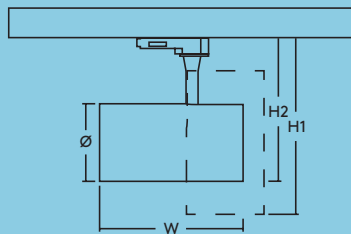

THORNeco

Specification

Electrical class	I
Ambient operating temperature	-20 °C to +35 °C

Installation / Mounting

Mounting	Compatible with: GLOBAL, EUTRAC, POWERGEAR, ZUMTOBEL, NORLUX, NUCO, NORDIC
----------	--

Material / Finish

Body	Aluminium die-cast, white (RAL9016), black (RAL9005)
------	---

Light source information

Colour temperature switch 3000 K & 4000 K	
Lumen	S 54 mm with 1200 lm(15W) and 15° or 38° beam angle
	M 69 mm with 2100 lm(23W) and 24° or 38° beam angle
	L 79 mm with 3200 lm(34W) and 24° or 38° beam angle
Efficiency	up to 94 lm/W
Lifetime	50 000 hours (@L70, Ta 25 °C)
CRI	>90

Ordering guide

Description	SAP Code
LUCA S 38° 1400 930 WH	96635365
LUCA M 38° 2100 930 WH	96635367
LUCA M 38° 2100 930 BK	96635371
LUCA M 38° 2100 940 WH	96635375
LUCA L 38° 3200 930 WH	96635369
LUCA L 38° 3200 930 BK	96635373
LUCA L 38° 3200 940 WH	96635377