


## PCE data sheet

|                     |                                                                                                                                                                                                                                                                                  |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#            | <b>0259-6</b>                                                                                                                                                                                                                                                                    |
| article description | <b>CEE-plug 30A 4P5W 6h IP44 UL</b>                                                                                                                                                                                                                                              |
| description long    | CEE-plug 30A 4P5W 6h IP44 UL (PCE530P6S)<br>housing material: PA6<br>rated current: 32A/30A<br>number of poles: 4P5W (5p)<br>clock position: 6h<br>rated voltage: 200/346 - 240/415Vac<br>contacts: brass<br>connection technology: screw terminals<br>IP protection class: IP44 |
| GTIN (EAN)          | 9003399075209                                                                                                                                                                                                                                                                    |
| country of origin   | AT                                                                                                                                                                                                                                                                               |
| customs number      | 85366990                                                                                                                                                                                                                                                                         |
| net weight          | 0.232 kg                                                                                                                                                                                                                                                                         |
| packaging quantity  | 10                                                                                                                                                                                                                                                                               |

|                                       |                  |
|---------------------------------------|------------------|
| ETIM 7.0                              | EC000140         |
| IEC-amperage                          | 32 A             |
| Amperage acc. UL/CSA (for UL-version) | 30 A             |
| Number of poles                       | 5                |
| Clock hour position                   | 6 h              |
| Identification colour                 | Red              |
| Degree of protection (IP)             | IP44             |
| Connection system                     | Screwed terminal |
| Cable entry                           | Swivel           |
| Angle of plug                         | Straight         |
| Material                              | Plastic          |
| Contact material                      | CuZn             |
| Surface treatment contacts            | Untreated        |

|                    |                       |
|--------------------|-----------------------|
| a                  | 155 mm                |
| b                  | 109 mm                |
| c                  | 70 mm                 |
| K (cable Ø)        | 13,3-19,3 mm          |
| SW                 | 50 mm                 |
| wire flexible      | 2,5-6 mm <sup>2</sup> |
| contact screws     | 110 Ncm               |
| strain relief      | 700 Ncm               |
| dismantling length | 50 mm                 |
| stripping length   | 12-14 mm              |

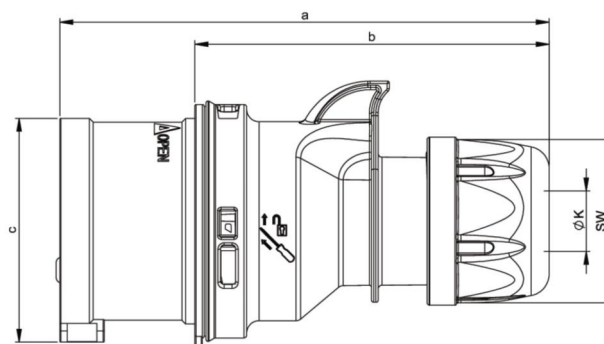

[www.manufacturer-safety.info](http://www.manufacturer-safety.info)