RESCLITE PRO TEC-GP TECTON linowy system oświetleniowy IP20

ZUMTOBEL


RESCLITE PRO TEC-GP ANT HC E1D WH 42185821

Oprawa bezpieczeństwa

LED emergency luminaire for antipanic lighting with min. 0,5 lux acc. to EN 1838; high ceilings (HC) version for high ceiling heights > 7 metres; 2 high power LEDs, neutral white 4,000 K; lens of polycarbonate; optimum thermal management via heat sink; TECTON module; Tool-free connection to TECTON continuous row system; roll-formed sheet steel with polyester paint finish; housing colour white (close to RAL9016); Luminaire with local battery supply for 1 h emergency lighting in maintained or non-maintained mode, with automatic test (auto-test) via the luminaire, optional central monitoring via DALI, display of luminaire status via status LED; NFC interface for addressing, configuration and maintenance via PROset Pen (article no.: 22170290) or PROset app; addressing also alternatively possible visually or via EZ-addressing; Maintained and non-maintained mode: +5°C to +30°C; power supply: 220-240 V AC (+/- 10%), 50-60 Hz; Luminaire input power: 6.7 W (with battery fast-charge in maintaned mode); typical power (without battery charge): 4,6 W in maintained mode / 1,1 W in non-maintained mode; Non-maintained and maintained mode settable via jumper and NFC interface; IP20; SC1; Luminaire wired with halogen-free and silicone-free leads; Impact strength: IK04; Dimensions: 500 x 60 x 85 mm; weight: 0.94 kg; Robust, integrated battery with 3-year warranty. Valid according to terms of the manufacturer's warranty, available at https://www.zumtobel.com/media/downloads/Garantiebedingungen_DE.pdf; Battery warranty invalid if installation takes place three (3) months after delivery EXW (Incoterms 2010)




ZS_RES_F_PRO_TEC-GP_ExD_ANT_HC_WH.jpg

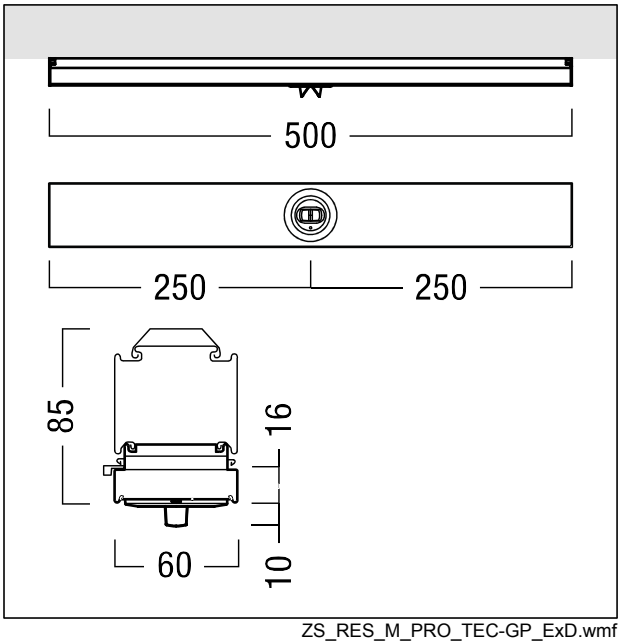

ZS_RES_M_PRO_TEC-GP_ExD.wmf

Dystrybucja światła STD - Standard

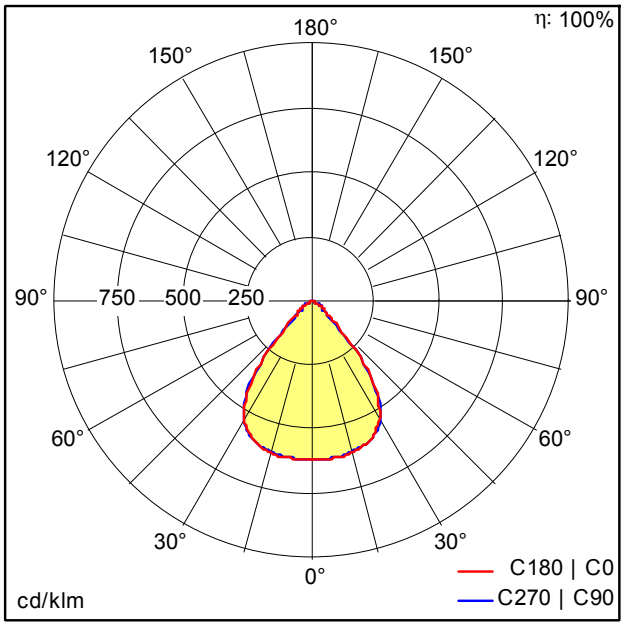

D43618_RESC_PRO_TEC-GP_ANT_HC_E1D_WH.ldt

- Źródło światła: LED
- Strumień świetlny oprawy*: 367 lm
- Całkowity strumień "awaryjny": 367 lm
- Skuteczność oprawy*: 55 lm/W
- Współczynnik oddawania barw: 70
- Statecznik: 1 x 89800524 DRV EM TR LBS P ST DA 5W 2
- Tolerancja miejscowa barwy (initial Mac Adam): 5
- Średnia żywotność nominalna*: L95 100000h przy 25°C
- Moc opraw*: 6,7 W Współczynnik mocy = 0,79
- Moc w trybie czuwania*: 1,2 W
- Wydajność ładowania: 2,07 W
- Znamionowa trwałość użytkowa: 1 h
- : D - Zamknięta IP2X

Wartości oznaczone gwiazdką (*) są wartościami znamionowymi. Inicjalna tolerancja mocy oraz strumienia świetlnego wynosi +/-10%. Jeżeli nie podano inaczej , wartości te obowiązują dla temperatury 25°C

IP20 halogen IK04

Zmiany technniczne zastrzeżone. 29.08.2023 © Zumtobel - 5 lat gwarancji zgodnie z warunkami gwarancyjnymi, które znajdują się pod adresem: www.zumtobe.com/guarantee