ZUMTOBEL


V2 M 3600-940 SWI 3VVC WFL BK BK 60715873

Oprawa typu "spot" LED

LED spotlight with stabilised colour temperature; optimised for efficient and high-output accent lighting in retail and automotive applications as well as architectural lighting; Luminaire with 3-phase universal adapter with integrated InTrack converter (for 3-phase/L3+DALI track, for ceiling mounting only), switchable luminaire; adapter colour black; switchable luminaire; Colour rendering Ra > 90, colour temperature 4000 K (neutral white); Luminaire with WIDE FLOOD light distribution 43 °; Chromaticity tolerance (initial MacAdam): 2; Luminaire luminous flux: 3800 lm, Luminaire efficacy: 88 lm/W; service life: 50000 h for luminous flux at 85%; Luminaire input power: 43 W; mains voltage: 220-240V/ 50/60Hz; Spotlight rotatable through 337° and tiltable through 90°; spotlight housing made of die-cast aluminium, surface finish: black Micro-textured paint; excellent glare control via front ring made of polycarbonate black; front ring serves to accommodate the accessories (optical, protective glass, honeycomb louvre); specular reflector made of polycarbonate highly reflective aluminized finish, iridescence-free; specular reflector designed to be interchangeable and retrofitted; dimensions: 345x95x204 mm; weight: 1 kg;
Wall mounting not permitted; not suitable for point outlet;




ZS_VI2_F_Strahler_M_3VVC_blm.jpg

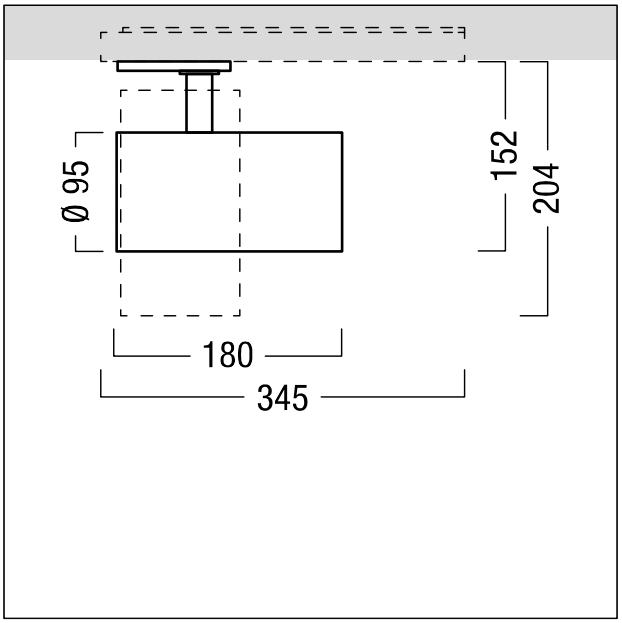

ZS_VI2_M_M_3VVC.wmf

Dystrybucja światła STD - Standard

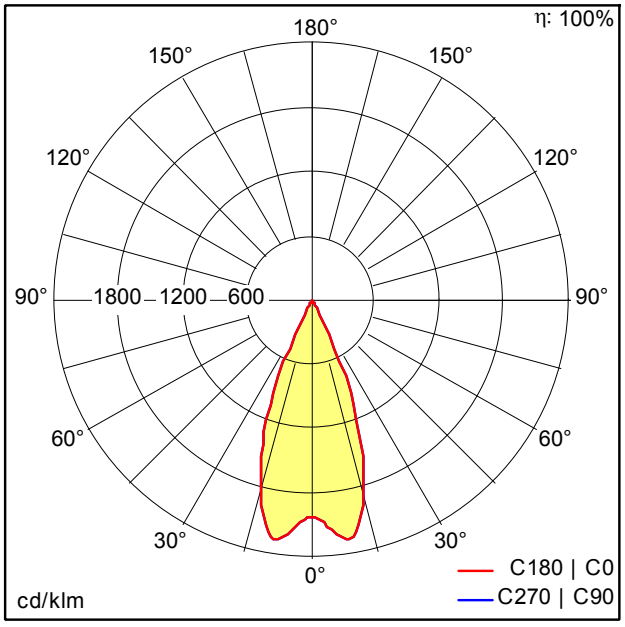

STx234.ldt

- Źródło światła: LED
- Strumień świetlny oprawy*: 3800 lm
- Skuteczność oprawy*: 88 lm/W
- Współczynnik oddawania barw: 90
- Statecznik: 1 x 06890850 DRV VS I 45W 1.05A 43V F #3VVC ROT BK
- Temperatura barwowa*: 4000 Kelvin
- Tolerancja miejscowa barwy (initial Mac Adam): 2
- Średnia żywotność nominalna*: L85 50000h przy 25°C
- Moc opraw*: 43 W Współczynnik mocy = 0,99
- sterowanie: SWI
- Kategoria konserwacji CIE 97: C - Zamknięty u góry odbłyśnik
- Total harmonic distortion (THD): 7,50 %

Ten produkt zawiera źródło światła o klasie efektywności energetycznej E.

Wartości oznaczone gwiazdką (*) są wartościami znamionowymi. Inicjalna tolerancja mocy oraz strumienia świetlnego wynosi +/-10%. Jeżeli nie podano inaczej , wartości te obowiązują dla temperatury 25°C

IP20 halogen 0,3m 650°C incl. LED

Zmiany technniczne zastrzeżone. 29.08.2023 © Zumtobel - 5 lat gwarancji zgodnie z warunkami gwarancyjnymi, które znajdują się pod adresem: www.zumtobel.com/guarantee