

# Specifications

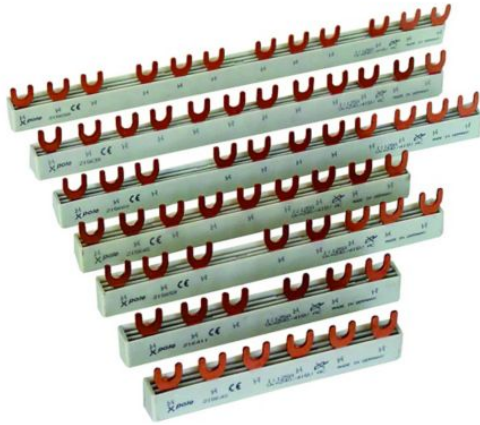


Photo is representative

## Eaton 215642

Eaton Moeller series xPole - Busbar. EV busbars 2Ph., 6HP, 63A for PLS. CLS. PKN., PFIM, PFHM, PFNM

### General specifications

|                      |                             |
|----------------------|-----------------------------|
| PRODUCT NAME         | Eaton Moeller series busbar |
| CATALOG NUMBER       | 215642                      |
| MODEL CODE           | EVG-2PHAS/6MODUL            |
| EAN                  | 4015082156428               |
| PRODUCT LENGTH/DEPTH | 104 mm                      |
| PRODUCT HEIGHT       | 30 mm                       |
| PRODUCT WIDTH        | 7 mm                        |
| PRODUCT WEIGHT       | 0.025 kg                    |
| COMPLIANCES          | RoHS conform                |
| CERTIFICATIONS       | CE                          |
| GLOBAL CATALOG       | 215642                      |
| PRODUCT TYPE         | Busbar                      |

## Product specifications

|                                                     |                                                                                                                                                    |
|-----------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>USED WITH</b>                                    | PLS, CLS, PKN., PFIM, PFHM, PFNM<br>EVG<br>Busbar                                                                                                  |
| <b>TYPE</b>                                         | <ul style="list-style-type: none"><li>• Busbar</li><li>• EVG</li></ul>                                                                             |
| <b>FEATURES</b>                                     | Insulated                                                                                                                                          |
| <b>ACCESSORY/SPARE PART TYPE</b>                    | Busbar for residual current circuit breakers<br>Busbar for miniature circuit breaker<br>Busbar for combined residual current/power circuit breaker |
| <b>ELECTRIC CONNECTION TYPE</b>                     | Fork                                                                                                                                               |
| <b>RATED SURGE VOLTAGE</b>                          | 4 kV                                                                                                                                               |
| <b>RATED UNINTERRUPTED CURRENT (IU)</b>             | 63 A                                                                                                                                               |
| <b>SUITABLE FOR NUMBER OF DEVICES</b>               | 3                                                                                                                                                  |
| <b>NUMBER OF POLES</b>                              | Two-pole                                                                                                                                           |
| <b>COLOR</b>                                        | Other                                                                                                                                              |
| <b>CROSS SECTION</b>                                | 10 mm <sup>2</sup>                                                                                                                                 |
| <b>NUMBER OF MODULAR SPACINGS</b>                   | 6                                                                                                                                                  |
| <b>NUMBER OF PHASES</b>                             | 2                                                                                                                                                  |
| <b>RATED OPERATIONAL VOLTAGE (UE) - MAX</b>         | 500 V                                                                                                                                              |
| <b>RATED CONDITIONAL SHORT-CIRCUIT CURRENT (IQ)</b> | 25 kA                                                                                                                                              |
| <b>FUNCTIONS</b>                                    | Busbar                                                                                                                                             |
| <b>SUITABLE FOR</b>                                 | 3 devices                                                                                                                                          |

## Resources

|                               |                                                                       |
|-------------------------------|-----------------------------------------------------------------------|
| DECLARATIONS OF CONFORMITY    | <a href="#">eaton-busbar-declaration-of-conformity-eu250210en.pdf</a> |
| DRAWINGS                      | <a href="#">eaton-busbar-3d-drawing.jpg</a>                           |
| SPECIFICATIONS AND DATASHEETS | <a href="#">Eaton Specification Sheet - 215642</a>                    |

|                 |
|-----------------|
| PROJECT NAME:   |
| PROJECT NUMBER: |
| PREPARED BY:    |
| DATE:           |



**Eaton Corporation plc** Eaton House  
30 Pembroke Road  
Dublin 4, Ireland  
Eaton.com

© 2026 Eaton. All Rights Reserved.

Follow us on social media to get the latest product and support information.

